


15


TKT # 3850  
I

7 13401

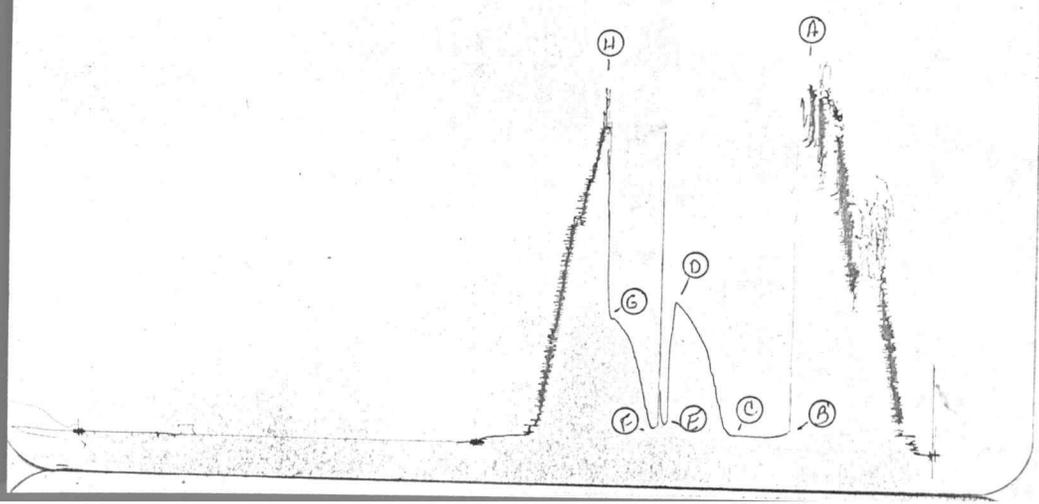

TRT # 3850  
0


7/563

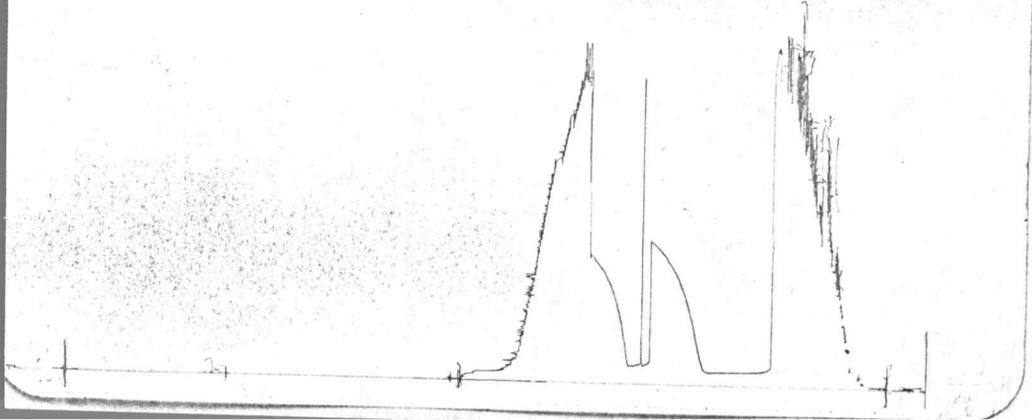

FORMATION

TEST

REPORT

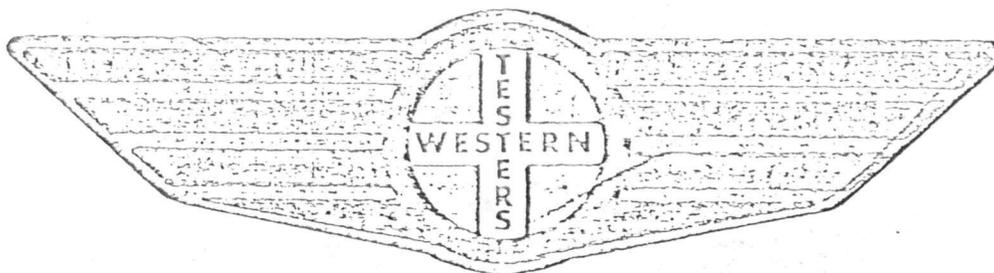

Home Office:

Wichita, Kansas 67201

P.O. Box 1599

Phone (316) 262-5861

WESTERN TESTING CO. INC.  
SUBSURFACE PRESSURE SURVEY

DATE: 12/13/84  
CUSTOMER: PETROLEUM ENERGY INC.  
WELL: 1 TEST: 1  
ELEVATION (KB): 1713 FORMATION: ARBUCKLE  
SECTION: 4 TOWNSHIP: 20S  
RANGE: 9W COUNTY: RICE STATE: KANSAS  
GAUGE SN #3473 RANGE: 4000 CLOCK: 12

TICKET #3850  
LEASE: "E" MILLER  
GEOLOGIST: WREATH

INTERVAL TEST FROM: 3181 FT TO: 3234 FT TOTAL DEPTH: 3234 FT  
DEPTH OF SELECTIVE ZONE: FT  
PACKER DEPTH: 3176 FT SIZE: 6 5/8 IN PACKER DEPTH: 3181 FT SIZE: 6 5/8 IN  
PACKER DEPTH: FT SIZE: IN PACKER DEPTH: FT SIZE: IN

DRILLING CONTRACTOR: ALLEN DRLG  
MUD TYPE: STARCH VISCOSITY: 40  
WEIGHT: 9.8 WATER LOSS (CC): 16.4  
CHLORIDES (P.P.M.): 68000

JARS - MAKE: SERIAL NUMBER:  
DID WELL FLOW? REVERSED OUT?

DRILL COLLAR LENGTH: 121 FT I.D.: 2.25 IN  
WEIGHT PIPE LENGTH: FT I.D.: IN  
DRILL PIPE LENGTH: 3039 FT I.D.: 3.8 IN  
TEST TOOL LENGTH: 21 FT TOOL SIZE: 5 1/2 OD IN  
ANCHOR LENGTH: 53 FT SIZE: 5 1/2 OD IN  
SURFACE CHOKE SIZE: 3/4 IN BOTTOM CHOKE SIZE: 3/4 IN  
MAIN HOLE SIZE: 7 7/8 IN TOOL JOINT SIZE: 4 1/2 XH IN

BLOW: INITIAL FLOW PERIOD WEAK BLOW. HOSE 1" IN BUCKET.  
DIED IN 37 MINUTES. REMAINED DEAD.  
FINAL FLOW PERIOD NO BLOW. FLUSHED TOOL IN 7  
MINUTES. WEAK SURFACE BLOW. DIED IN 3 MINUTES.

RECOVERED: 60 FT OF: SLIGHTLY GAS & OIL CUT MUD.  
RECOVERED: FT OF: (10% GAS; 5% OIL; 85% MUD).  
RECOVERED: FT OF:  
RECOVERED: FT OF:

REMARKS:


TIME SET PACKER(S): 4:30 AM TIME STARTED OFF BOTTOM: 6:45 AM  
WELL TEMPERATURE: 104 'F  
INITIAL HYDROSTATIC PRESSURE: (A) 1846 PSI  
INITIAL FLOW PERIOD MIN: 45 (B) 59 PSI TO (C) 67 PSI  
INITIAL CLOSED IN PERIOD MIN: 45 (D) 762 PSI  
FINAL FLOW PERIOD MIN: 15 (E) 119 PSI TO (F) 96 PSI  
FINAL CLOSED IN PERIOD MIN: 30 (G) 673 PSI  
FINAL HYDROSTATIC PRESSURE (H) 1793 PSI



74CT# 6403

7

I

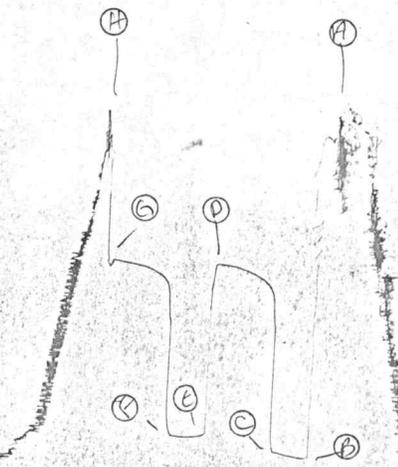

13403

FCIC# 6403

7

O


1563



FORMATION

TEST

REPORT

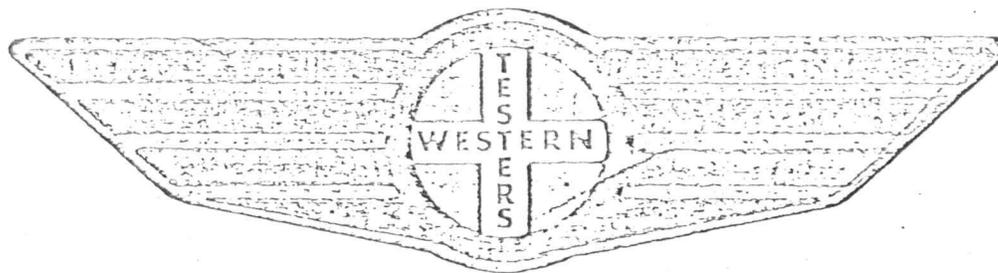

Home Office:


Wichita, Kansas 67201

P.O. Box 1599

Phone (316) 262-5861



TRT # 6404  
I

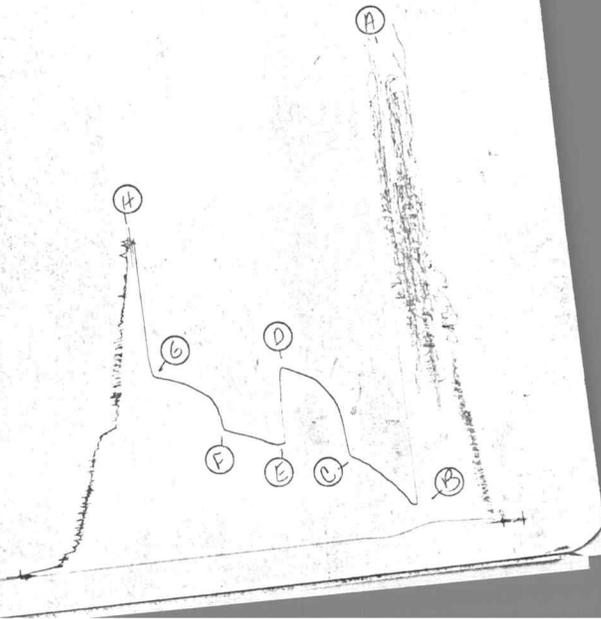

TKT # 60404

0


563

7

FORMATION

TEST

REPORT

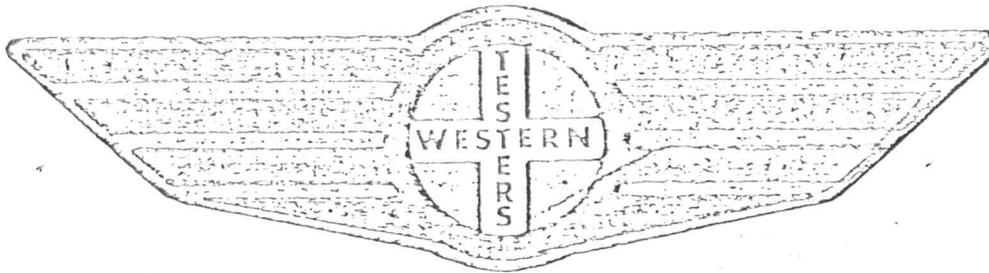

Home Office:

Wichita, Kansas 67201

P.O. Box 1599

Phone (316) 262-5861

company  
PETROLEUM ENERGY, INC.  
Lease and Well No.  
#1 "E" MILLER  
Sec. 4  
Twp. 20S  
Rge. 9W  
Test No. 3  
Date 12/14/84

