

## ATLANTIC PETROLEUM CORPORATION.

9711

## " WELL RECORD. "

WELL #3, on Chris. Bahr No. 2, NE  $\frac{1}{4}$  Section 23-23-13, Woodson County, Kansas.  
 200' from South Line. 710' from West Line.  
 Rig Commenced May 20, 1921. Rig Completed May 24, 1921.  
 Rig Contractor Slater Steel Rig Company.  
 Drilling Commenced June 5, 1921. Drilling Completed July 7, 1921.  
 Contractor Patton Drilling Company.

Soil	2	
Hard White Lime	32	
Soft Blue Slate	62	
Hard White Lime	66	
Soft Red Rock	93	
Hard White Lime	105	
Soft White Slate	125	
Hard White Lime	130	
Soft White Slate	140	
Hard White Lime	158	
Blue Soft Slate	206	
Hard White Lime	237	
Soft Blue Slate	287	
Hard White Lime	300	
Soft Blue Slate	358	
Hard White Lime	369	
Soft Blue Slate	424	
Soft Grey Sand	434	Little Water.
Soft White Slate	500	
Hard White Lime	518	
Soft White Lime	658	
Hard White Lime	663	
Soft Gray Sand	690	Hole full Water.
Soft White Slate	702	
Black Hard Lime	712	Set 12 $\frac{1}{2}$ "
Hard White Slate	716	
Hard White Lime	764	
Soft White Slate	868	
Hard White Lime	873	
Soft Black Slate	883	
Hard White Lime	895	
Soft White Slate	899	
Hard White Lime	903	
Soft White Broken Lime	924	
Hard White Lime	949	
Soft Black Slate	979	
Hard White Lime	984	Little Water.
Soft Black Slate	992	
Hard White Lime	1030	
Soft White Broken Lime	1042	Hole full Water.
Hard White Lime.	1052	
Soft White Slate	1056	
Hard White Lime	1106	10" set at 1058.
Soft White Slate	1225	
Hard White Lime	1235	
Soft White Shale	1265	
Hard White Lime	1280	
Soft White Shale	1400	Little Water.
Soft Blue Shale	1520	Set 8 $\frac{1}{2}$ "
Hard Blue Lime	1525	
Soft Blue Shale	1660	
Soft Blue Sand	1675	Oil & Water.
Soft White Slate	1677	
Soft Sand	1775	
Sand,	1814	Total Depth.

ATLANTIC PETROLEUM CORPORATION.

" WELL RECORD. "

Well #3, Chris. Bahr No. 2. ( Continued. )

Casing Record.

12"	50#	712'	Pulled.
10"	40#	1058'	Pulled.
8 $\frac{1}{4}$ "	28#	1532'-7"	Left In.
6-5/8" 20 &		171768'-8"	Left In.
2 In Tubing	4 $\frac{1}{2}$ #	1805'	

Names of Sand	Top	Bottom	Feet of Sand.	Quarts	Initial Torpedo.	Date of Shot.
Oil & Water	1660'	1675'	15'			
Pay Sand	1775'	1814'	39'	80		7-6-21.
Total Depth		1814'				

Production first 24 Hours Swabbed 50 Bbls.

Details of shot 20' 5" Shell Between 1790 & 1809'.

From  
Dorby

Sec. 23 Twp. 23 Rge. 13


Farm No. \_\_\_\_\_

Company \_\_\_\_\_

Elev. \_\_\_\_\_ T. D. \_\_\_\_\_

Log No. 7709

Kansas  
Woodson County  
23-23-13  
Atlantic Pet. Corp.  
Chris Bahv #3  
N.E. 1/4  
200' from S. line + 710' from W. line.

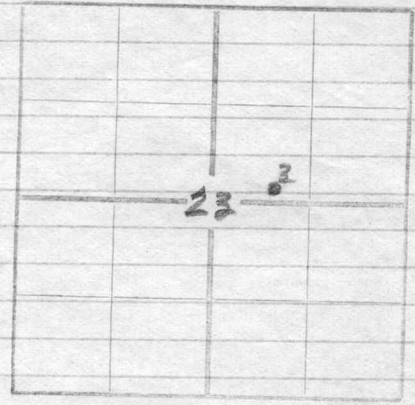

- Soil - 2
- L - 32
- sl - 62
- L - 66
- R.R. - 93
- L - 105
- sl - 125
- L - 130
- sl - 140
- L - 158
- sl - 206
- L - 237
- sl - 287
- L - 300
- sl - 358
- L - 369
- sl - 424
- L - 434 (water)
- sl - 500
- L - 663
- L - 690 (H.F.W.)
- sl - 702
- L - 712
- sl - 716
- L - 764
- sl - 868
- L - 873
- sl - 883
- L - 895
- sl - 899
- L - 903
- broken L - 924
- L - 949
- sl - 979
- L - 984 (water)
- sl - 992
- L - 1030
- broken L - 1042 (H.F.W.)
- L - 1052
- sl - 1056
- L - 1106
- sl - 1225
- L - 1235
- sl - 1265
- L - 1280
- sl - 1520 (little water at 1400)

- line - 1525
- shell - 1660
- sand - 1775
- L - 1814 T.D.

Comm - June 5 - 1921  
Fin - July 7 - 1921

Casing Record -  
12" - 712'  
10" - 1058'  
8 1/4" - 1532'  
6 5/8" - 1768'



Atlantic Pat  
#3 Bahr

Kansas

23-25-13

E


Soil	2	
Hard white lime	32	
Soft blue slate	62	
Hard white lime	66	
Soft red rock	93	
Hard white lime	105	
Soft white slate	125	
Hard white lime	130	
Soft white slate	140	
Hard white lime	158	
Soft blue slate	206	
Hard white lime	237	
Soft blue slate	287	
Hard white lime	300	
Soft blue slate	358	
Hard white lime	369	
Soft blue slate	424	
Soft gray sand	434	Little water
Soft white slate	500	
Hard white lime	518	
Soft white lime	658	
Hard white lime	663	
Soft gray sand	690	Hole full water
Soft white slate	702	
Black hard lime	712	set 12"
Hard white slate	716	
Hard white lime	764	
Soft white slate	868	
Hard white lime	873	
soft black slate	883	
Hard white lime	895	
Soft white slate	899	
Hard white lime	903	
Soft white broken lime	924	
Hard white lime	949	
Soft black slate	979	
Hard white lime	984	
Soft black slate	992	
Hard white lime	1030	
Soft white broken lime	1042	
Hard white lime	1052	
Soft white slate	1056	
Hard white lime	1106	Set 10" at 1058
Soft white slate	1225	
Hard white lime	1235	
Soft white shale	1265	
Hard white lime	1280	
Soft white shale	1400	little water
soft blue shale	1520	set 8 1/4"
Hard blue lime	1525	
Soft blue shale	1660	
Soft blue sand	1675	Oil & water
Soft white slate	1677	
Soft sand	1775	
Sand	1814	Total depth

Casing:

12"	50	712' pulled
10"	40	1058 "
8 1/2"	28	1532'7" left in
6 5/8		1768'8" "

n.d.

Location <sup>200' from S line  
710' " W line</sup> NE 1/4



Sec. 23, T. 23, R. 13<sup>E</sup><sub>X</sub>

Farm Chris Bahr No. 3 County Woodson

Company Atlantic

Commenced \_\_\_\_\_ Completed \_\_\_\_\_

Elevation 1230 T.D. 1814 I. P. \_\_\_\_\_

~~PLOTTED LOG ONLY~~

K.C. Lime	500-1106
Oswego	1280
Shale	1520
Lime	1525
Shale	1660.
Sand - oil & water	1675*
Shale	1677
Sand	1814 T.D.
Top of Lime sand estimated 1800	

✓