



# Weatherford® Completion Systems

## DRILL STEM TEST REPORT

Prepared For: **EOG Resources**  
Oklahoma City, OK

RECEIVED  
KANSAS CORPORATION COMMISSION

SEP 29 2008

CONSERVATION DIVISION  
WICHITA, KS

ATTN: Gary Brock

**S.11-22s-34wFinney**

**LaRue 11-#1**

Start Date: 2008.08.02 @ 06:36:15

End Date: 2008.08.02 @ 15:59:45

Job Ticket #: 31372                      DST #: 1

ALPINE OIL SERVICES CORPORATION  
2460, 240 - 4 Avenue S.W. Calgary, AB. T2P 4H4  
ph: 263-7800 fax: 264-7260



# Weatherford® Completion Systems

## DRILL STEM TEST REPORT

EOG Resources  
Oklahoma City, OK  
ATTN: Gary Brock

LaRue 11-#1  
S.11-22s-34wFinney  
Job Ticket: 31372      DST#: 1  
Test Start: 2008.08.02 @ 06:36:15

### GENERAL INFORMATION:


Formation: **Pawnee**  
Deviated: **No** Whipstock:                      ft (KB)  
Time Tool Opened: 08:54:15  
Time Test Ended: 15:59:45  
Interval: **4416.00 ft (KB) To 4454.00 ft (KB) (TVD)**  
Total Depth: **4454.00 ft (KB) (TVD)**  
Hole Diameter: **7.88 inches** Hole Condition: **Good**  
Test Type: **Conventional Bottom Hole**  
Tester: **Chuck Smith**  
Unit No: **37**  
Reference Elevations: **2950.00 ft (KB)**  
**2928.00 ft (CF)**  
KB to GR/CF: **22.00 ft**

### Serial #: 8351

Inside

Press@RunDepth: **28.41 psig @ 4419.00 ft (KB)** Capacity: **7000.00 psig**  
Start Date: **2008.08.02** End Date: **2008.08.02** Last Calib.: **2008.08.02**  
Start Time: **06:36:16** End Time: **15:59:45** Time On Btm: **2008.08.02 @ 08:53:30**  
Time Off Btm: **2008.08.02 @ 13:28:15**

TEST COMMENT: IF: No blow.  
IS: No return.  
FF: No Blow  
FS: No Return

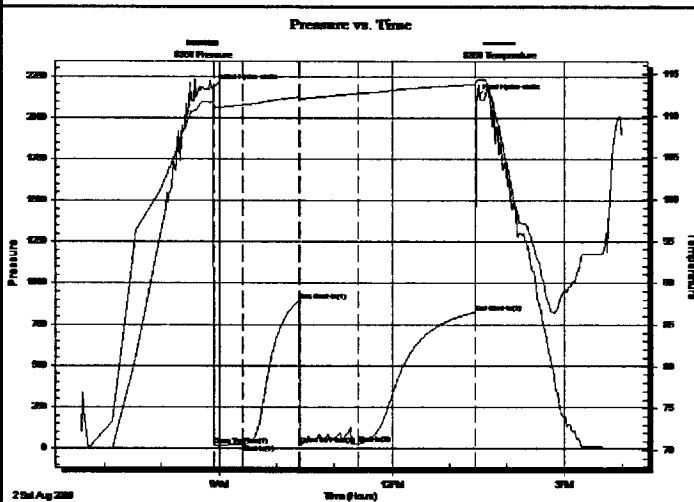

### PRESSURE SUMMARY

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	2176.87	111.65	Initial Hydro-static
1	16.02	111.07	Open To Flow (1)
31	21.96	111.27	Shut-in(1)
91	895.13	112.22	End Shut-in(1)
91	24.22	111.97	Open To Flow (2)
152	28.41	112.65	Shut-in(2)
274	824.16	113.74	End Shut-in(2)
275	2117.68	114.09	Final Hydro-static

### Recovery

Length (ft)	Description	Volume (bbl)
10.00	100% M with spots of oil	0.05

### Gas Rates

	Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)





**Weatherford®**  
**Completion Systems**

**DRILL STEM TEST REPORT**

**TOOL DIAGRAM**

EOG Resources

**LaRue 11-#1**

Oklahoma City, OK

**S.11-22s-34wFinney**

ATTN: Gary Brock

Job Ticket: 31372

**DST#: 1**

Test Start: 2008.08.02 @ 06:36:15

**Tool Information**

Drill Pipe:	Length: 4046.00 ft	Diameter: 3.80 inches	Volume: 56.75 bbl	Tool Weight: 2700.00 lb
Heavy Wt. Pipe:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight set on Packer: 28000.00 lb
Drill Collar:	Length: 368.00 ft	Diameter: 2.25 inches	Volume: 1.81 bbl	Weight to Pull Loose: 100000.0 lb
			<u>Total Volume: 58.56 bbl</u>	Tool Chased 0.00 ft
Drill Pipe Above KB:	28.00 ft			String Weight: Initial 68000.00 lb
Depth to Top Packer:	4416.00 ft			Final 68000.00 lb
Depth to Bottom Packer:	ft			
Interval between Packers:	38.00 ft			
Tool Length:	68.00 ft			
Number of Packers:	2	Diameter: 6.75 inches		

Tool Comments:

Tool Description	Length (ft)	Serial No.	Position	Depth (ft)	Accum. Lengths
Change Over Sub	1.00			4387.00	
Shut In Tool	5.00			4392.00	
Sampler	2.00			4394.00	
Hydraulic tool	5.00			4399.00	
Jars	5.00			4404.00	
Safety Joint	3.00			4407.00	
Packer	5.00			4412.00	30.00 Bottom Of Top Packer
Packer	4.00			4416.00	
Stubb	1.00			4417.00	
Perforations	2.00			4419.00	
Recorder	0.00	8017	inside	4419.00	
Recorder	0.00	8351	inside	4419.00	
Perforations	30.00			4449.00	
Bullnose	5.00			4454.00	38.00 Bottom Packers & Anchor

**Total Tool Length: 68.00**



**Weatherford®**  
**Completion Systems**

**DRILL STEM TEST REPORT**

**FLUID SUMMARY**

EOG Resources

LaRue 11-#1

Oklahoma City, OK

S.11-22s-34wFinney

Job Ticket: 31372

DST#: 1

ATTN: Gary Brock

Test Start: 2008.08.02 @ 06:36:15

**Mud and Cushion Information**

Mud Type: Gel Chem

Cushion Type:

Oil API:

0 deg API

Mud Weight: 9.00 lb/gal

Cushion Length:

ft

Water Salinity:

0 ppm

Viscosity: 50.00 sec/qt

Cushion Volume:

bbl

Water Loss: 10.78 cm<sup>2</sup>

Gas Cushion Type:

Resistivity: 0.00 ohm.m

Gas Cushion Pressure:

psig

Salinity: 3000.00 ppm

Filter Cake: 2.00 inches

**Recovery Information**

Recovery Table

Length ft	Description	Volume bbl
10.00	100% M with spots of oil	0.049

Total Length: 10.00 ft

Total Volume: 0.049 bbl

Num Fluid Samples: 0

Num Gas Bombs: 0

Serial #:

Laboratory Name:

Laboratory Location:

Recovery Comments:



# DRILL STEM TEST REPORT

GAS RATES

**Weatherford**<sup>®</sup>  
**Completion Systems**

EOG Resources

LaRue 11-#1

Oklahoma City, OK

S.11-22s-34wFinney

ATTN: Gary Brock

Job Ticket: 31372

DST#: 1


Test Start: 2008.08.02 @ 06:36:15


## Gas Rates Information

Temperature: 59 deg C  
Relative Density: 0.65  
Z Factor: 0.8

Gas Rates Table

Flow Period	Elapsed Time	Choke (mm)	Pressure (kPaa)	Gas Rate (m <sup>3</sup> /d)
		0.00	0.00	0.00

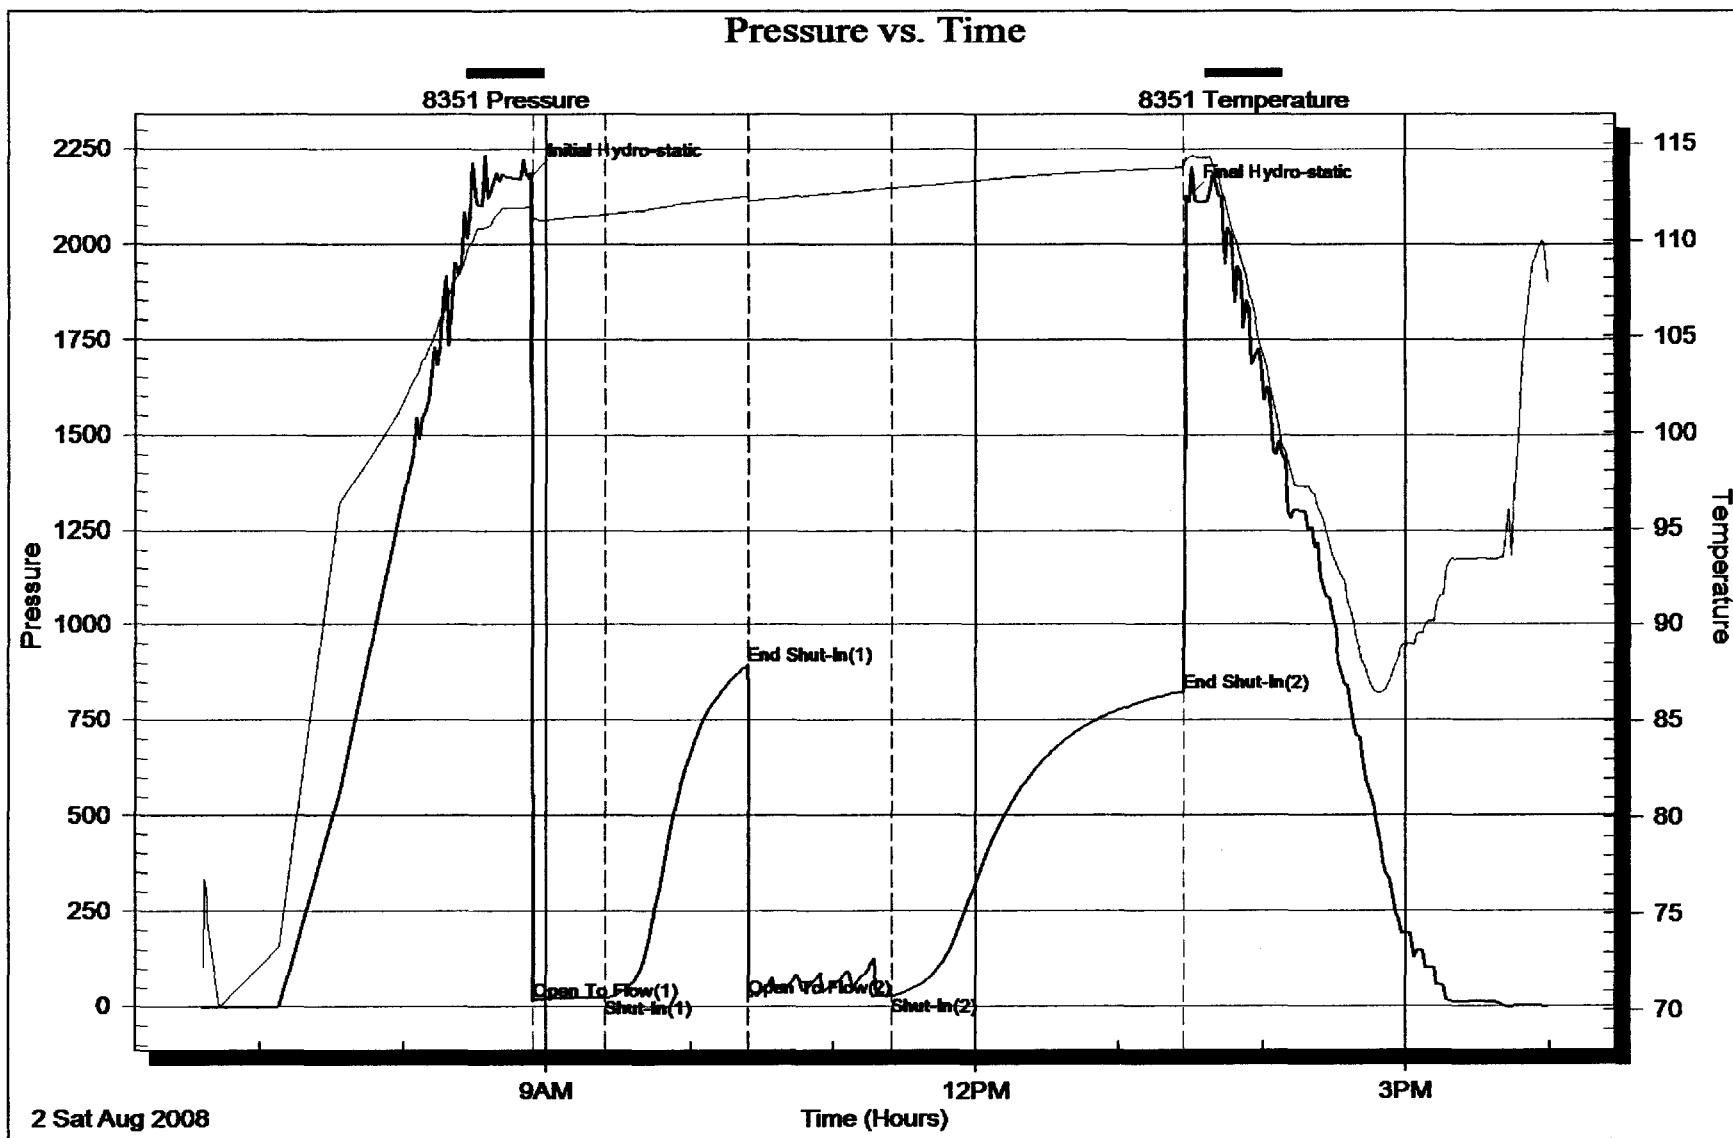

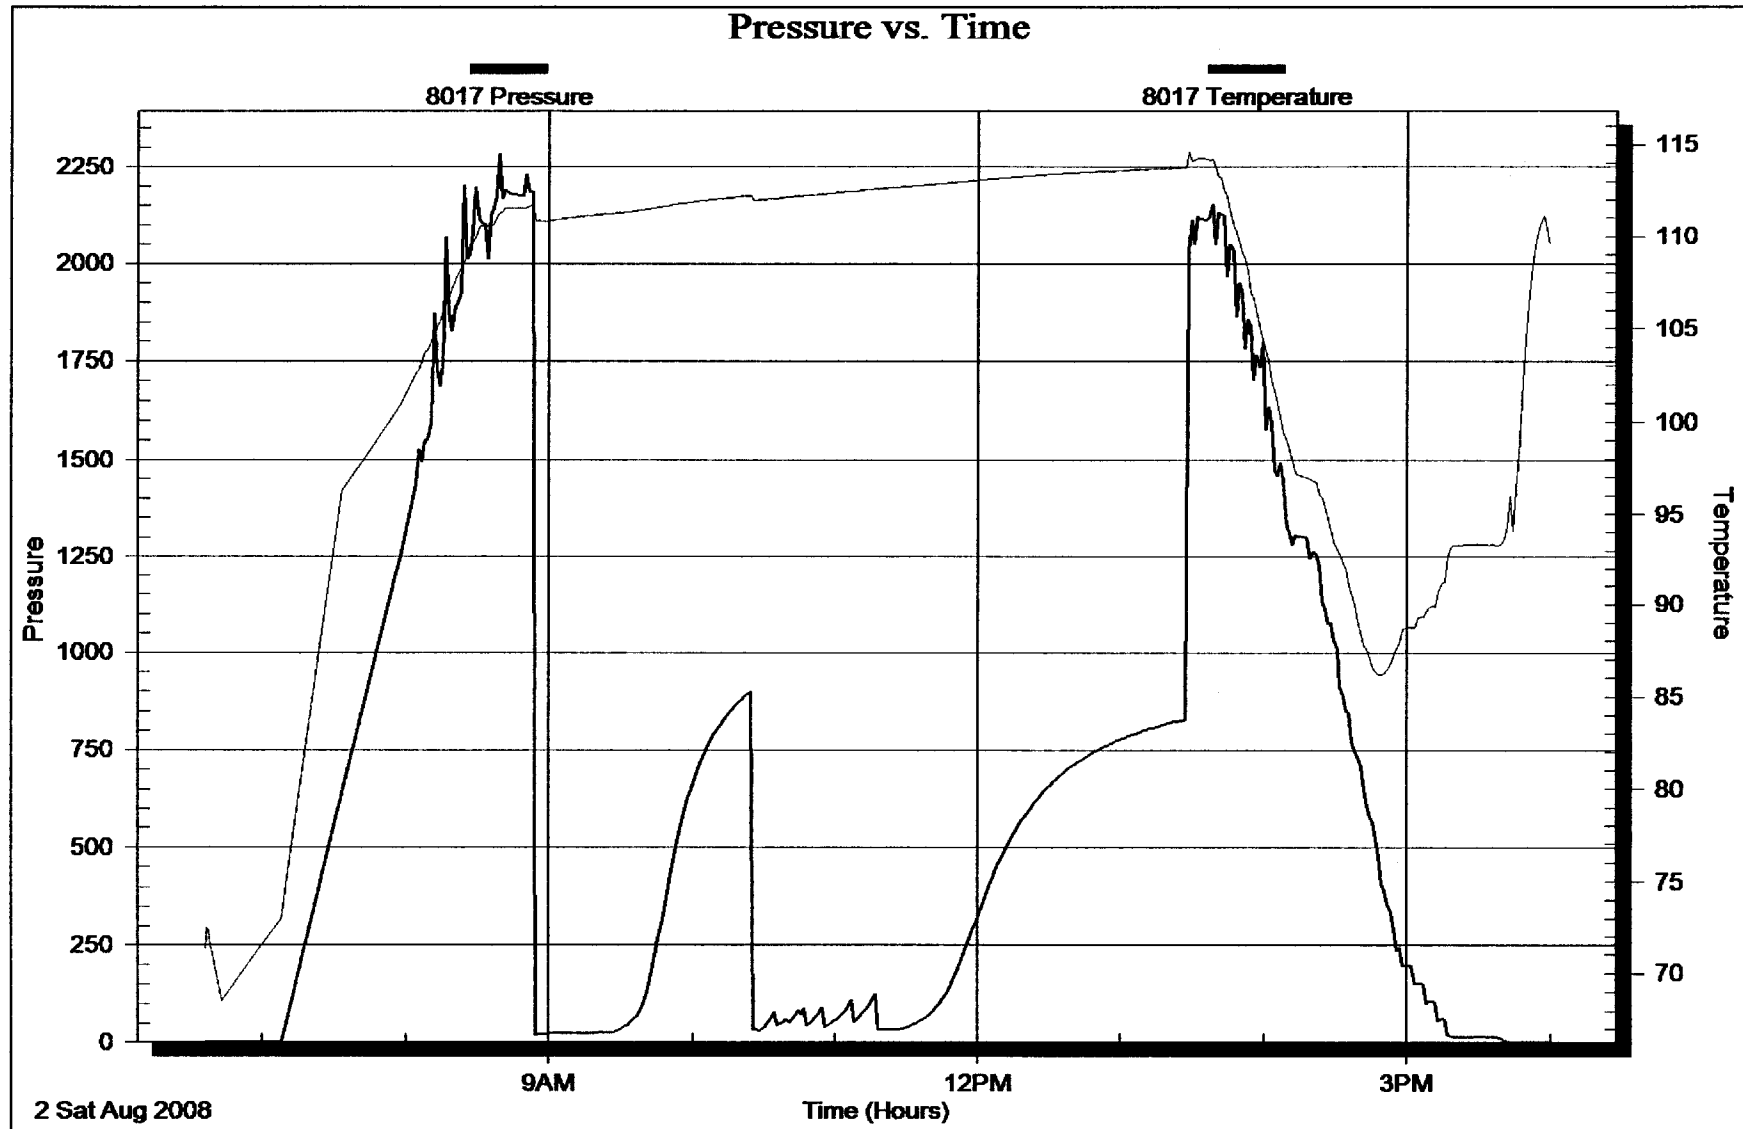



**Weatherford®**  
**Completion Systems**

**DRILL STEM TESTING - DATA LISTING**

EOG Resources

**LaRue 11-#1**

Oklahoma City, OK

**S.11-22s-34wFinney**

Job Ticket: 31372

**DST#: 1**

ATTN: Gary Brock

Test Start: 2008.08.02 @ 06:36:15

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	0.0	-1.92	72.3		0.6	-1.99	76.6
	0.0	-1.76	72.3		0.6	-1.98	76.7
	0.0	-1.79	72.3		0.6	-1.97	76.7
	0.1	-1.79	72.4		0.6	-1.97	76.8
	0.1	-1.79	72.4		0.6	-1.97	76.8
	0.1	-1.79	72.4		0.6	-1.96	76.8
	0.1	-1.81	72.5		0.6	-1.95	76.8
	0.1	-1.83	72.5		0.7	-1.93	76.8
	0.1	-1.84	72.6		0.7	-1.93	76.8
	0.2	-1.87	72.7		0.7	-1.92	76.8
	0.2	-1.89	72.8		0.7	-1.92	76.8
	0.2	-1.91	72.9		0.7	-1.91	76.8
	0.2	-1.92	73.1		0.8	-1.91	76.8
	0.2	-1.93	73.3		0.8	-1.90	76.8
	0.2	-1.94	73.5		0.8	-1.89	76.8
	0.3	-1.96	73.7		0.8	-1.88	76.7
	0.3	-1.96	73.9		0.8	-1.87	76.7
	0.3	-1.97	74.1		0.8	-1.87	76.7
	0.3	-1.97	74.3		0.9	-1.87	76.7
	0.3	-1.97	74.6		0.9	-1.87	76.7
	0.3	-1.98	74.8		0.9	-1.86	76.7
	0.3	-1.98	75.0		0.9	-1.86	76.6
	0.4	-1.98	75.2		0.9	-1.86	76.6
	0.4	-1.99	75.4		0.9	-1.85	76.6
	0.4	-1.99	75.5		0.9	-1.84	76.6
	0.4	-1.99	75.7		1.0	-1.84	76.6
	0.4	-1.99	75.9		1.0	-1.84	76.5
	0.4	-2.00	76.0		1.0	-1.83	76.5
	0.5	-2.00	76.2		1.0	-1.82	76.5
	0.5	-1.99	76.3		1.0	-1.82	76.5
	0.5	-1.99	76.4		1.0	-1.82	76.5
	0.5	-1.99	76.5		1.1	-1.80	76.4
	0.5	-1.98	76.6		1.1	-1.80	76.4

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	1.1	-1.80	76.4		1.8	-1.68	75.2
	1.1	-1.79	76.4		1.8	-1.69	75.1
	1.1	-1.78	76.4		1.8	-1.70	75.0
	1.1	-1.77	76.3		1.8	-1.70	75.0
	1.2	-1.77	76.3		1.9	-1.71	74.9
	1.2	-1.77	76.3		1.9	-1.71	74.8
	1.2	-1.75	76.3		1.9	-1.71	74.8
	1.2	-1.75	76.3		1.9	-1.71	74.7
	1.2	-1.75	76.2		1.9	-1.71	74.7
	1.3	-1.75	76.2		1.9	-1.72	74.6
	1.3	-1.74	76.2		2.0	-1.72	74.6
	1.3	-1.74	76.2		2.0	-1.73	74.5
	1.3	-1.74	76.2		2.0	-1.76	74.5
	1.3	-1.74	76.1		7.0	-1.78	70.2
	1.3	-1.74	76.1		12.0	-1.77	68.3
	1.4	-1.74	76.1		17.0	-1.74	69.0
	1.4	-1.73	76.1		22.0	-1.71	70.8
	1.4	-1.74	76.1		27.0	-1.69	72.4
	1.4	-1.74	76.1		32.0	-1.64	73.4
	1.4	-1.75	76.0		37.0	-1.54	74.6
	1.4	-1.75	76.0		42.0	40.71	87.3
	1.5	-1.75	76.0		47.0	160.67	92.7
	1.5	-1.75	76.0		52.0	378.70	94.8
	1.5	-1.75	76.0		57.0	560.63	96.3
	1.5	-1.76	75.9		62.0	704.86	97.8
	1.5	-1.75	75.9		67.0	844.08	98.0
	1.5	-1.75	75.9		72.0	982.00	100.0
	1.5	-1.75	75.9		77.0	1105.88	100.3
	1.6	-1.74	75.9		82.0	1285.62	101.1
	1.6	-1.74	75.8		87.0	1399.51	102.4
	1.6	-1.74	75.8		87.2	1465.55	102.4
	1.6	-1.74	75.8		87.5	1487.14	102.5
	1.6	-1.74	75.8		87.7	1537.98	102.6
	1.6	-1.72	75.7		88.0	1454.47	102.7
	1.7	-1.71	75.7		88.2	1448.13	102.7
	1.7	-1.71	75.6		88.5	1445.91	102.8
	1.7	-1.70	75.6		88.7	1444.88	102.8
	1.7	-1.70	75.5		89.0	1495.12	102.8
	1.7	-1.69	75.4		89.2	1544.00	102.9
	1.8	-1.67	75.3		89.5	1639.10	103.0
	1.8	-1.67	75.3		89.7	1499.92	103.1

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	90.0	1494.93	103.2		100.2	1841.15	106.1
	90.2	1492.95	103.2		100.5	1849.50	106.1
	90.5	1488.44	103.2		100.7	1785.28	106.4
	90.7	1548.28	103.3		101.0	1780.52	106.5
	91.0	1585.85	103.3		101.2	1778.23	106.5
	91.2	1707.15	103.6		101.5	1801.41	106.6
	91.5	1546.95	103.6		101.7	1915.00	106.6
	91.7	1542.32	103.7		102.0	1951.47	106.8
	92.0	1540.48	103.8		102.2	1834.72	107.0
	92.2	1539.06	103.8		102.5	1827.90	107.1
	92.5	1538.11	103.8		102.7	1825.66	107.1
	92.7	1516.88	103.8		103.0	1735.78	107.1
	93.0	1558.20	103.8		103.2	1847.77	107.1
	93.2	1610.50	103.8		103.5	1923.73	107.2
	93.5	1629.90	103.9		103.7	1958.17	107.2
	93.7	1763.14	104.0		104.0	1981.04	107.4
	94.0	1595.17	104.2		104.2	1881.60	107.6
	94.2	1589.92	104.3		104.5	1875.33	107.7
	94.5	1587.92	104.4		104.7	1872.88	107.8
	94.7	1586.47	104.4		105.0	1871.33	107.8
	95.0	1656.81	104.5		105.2	1869.98	107.8
	95.2	1741.00	104.5		105.5	1954.92	107.9
	95.5	1659.98	104.6		105.7	1982.49	107.9
	95.7	1641.01	104.8		106.0	2065.47	108.1
	96.0	1637.27	104.9		106.2	1930.12	108.1
	96.2	1635.60	105.0		106.5	1924.15	108.2
	96.5	1657.87	105.0		106.7	1920.47	108.2
	96.7	1730.44	105.0		107.0	1918.44	108.2
	97.0	1849.58	105.1		107.2	1938.00	108.2
	97.2	1690.78	105.2		107.5	2026.94	108.3
	97.5	1685.42	105.3		107.7	2086.94	108.4
	97.7	1683.05	105.3		108.0	1948.86	108.5
	98.0	1681.63	105.4		108.2	1973.68	108.7
	98.2	1697.40	105.4		108.5	1968.73	108.7
	98.5	1781.64	105.5		108.7	1966.69	108.8
	98.7	2056.03	105.7		109.0	1965.09	108.8
	99.0	1739.37	105.8		109.2	2084.68	108.9
	99.2	1733.58	106.0		109.5	2094.30	108.9
	99.5	1730.78	106.0		109.7	2299.47	109.2
	99.7	1729.12	106.1		110.0	2024.60	109.3
	100.0	1773.59	106.1		110.2	2018.32	109.4

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	110.5	2015.63	109.4		120.7	2136.09	110.8
	110.7	2014.02	109.5		121.0	2132.31	110.8
	111.0	2096.70	109.5		121.2	2173.54	110.8
	111.2	2175.58	109.6		121.5	2079.54	110.8
	111.5	2151.01	109.6		121.7	2164.46	111.0
	111.7	2072.07	109.7		122.0	2156.47	111.1
	112.0	2064.57	109.8		122.2	2153.05	111.1
	112.2	2061.87	109.8		122.5	2151.12	111.2
	112.5	1982.74	109.7		122.7	2275.77	111.2
	112.7	2172.50	109.8		123.0	2188.18	111.3
	113.0	2213.74	110.0		123.2	2175.74	111.3
	113.2	2178.44	110.2		123.5	2170.19	111.4
	113.5	2119.94	110.4		123.7	2167.38	111.4
	113.7	2111.66	110.5		124.0	2165.56	111.4
	114.0	2108.51	110.5		124.2	2164.20	111.4
	114.2	2106.69	110.5		124.5	2108.68	111.4
	114.5	2105.12	110.5		124.7	2305.77	111.5
	114.7	2104.03	110.6		125.0	2199.36	111.5
	115.0	2103.04	110.6		125.2	2189.72	111.6
	115.2	2102.07	110.6		125.5	2184.96	111.6
	115.5	2101.54	110.6		125.7	2182.43	111.6
	115.7	2100.46	110.6		126.0	2180.49	111.6
	116.0	2100.22	110.6		126.2	2179.22	111.6
	116.2	2099.65	110.6		126.5	2178.39	111.6
	116.5	2098.92	110.6		126.7	2177.42	111.6
	116.7	2098.72	110.6		127.0	2176.82	111.6
	117.0	2098.31	110.6		127.2	2176.30	111.6
	117.2	2097.79	110.6		127.5	2175.50	111.6
	117.5	2097.66	110.6		127.7	2175.28	111.6
	117.7	2097.56	110.6		128.0	2174.95	111.6
	118.0	2231.34	110.6		128.2	2174.68	111.6
	118.2	2137.98	110.6		128.5	2174.37	111.6
	118.5	2127.60	110.6		128.7	2174.04	111.6
	118.7	2122.66	110.7		129.0	2173.76	111.6
	119.0	2120.30	110.7		129.2	2173.48	111.6
	119.2	2118.79	110.7		129.5	2173.22	111.6
	119.5	2117.59	110.7		129.7	2172.96	111.6
	119.7	2374.07	110.8		130.0	2172.79	111.6
	120.0	2153.34	110.7		130.2	2172.53	111.6
	120.2	2143.32	110.7		130.5	2172.24	111.6
	120.5	2138.48	110.8		130.7	2172.11	111.6

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	131.0	2171.99	111.6		141.2	17.96	111.0
	131.2	2171.64	111.6		141.5	18.04	111.0
	131.5	2171.46	111.6		141.7	18.05	111.0
	131.7	2171.31	111.6		142.0	18.39	111.0
	132.0	2171.15	111.6		142.2	18.35	111.0
	132.2	2171.00	111.6		142.5	18.63	111.0
	132.5	2170.60	111.6		142.7	19.02	111.0
	132.7	2170.51	111.6		143.0	18.73	111.0
	133.0	2170.45	111.6		143.2	18.78	111.0
	133.2	2178.83	111.6		143.5	18.81	111.0
	133.5	2176.65	111.6		143.7	18.81	111.0
	133.7	2227.55	111.6		144.0	19.30	111.0
	134.0	2247.15	111.6		144.2	18.91	111.0
	134.2	2222.32	111.6		144.5	19.06	111.0
	134.5	2206.14	111.6		144.7	19.16	111.0
	134.7	2192.60	111.6		145.0	19.10	111.0
	135.0	2194.45	111.6		145.2	19.14	111.0
	135.2	2185.03	111.6		145.5	19.29	111.0
	135.5	2181.49	111.6		145.7	19.34	111.0
	135.7	2180.29	111.6		146.0	19.37	111.0
	136.0	2181.84	111.6		146.2	19.46	111.0
	136.2	2179.73	111.7		146.5	19.50	111.0
	136.5	2178.62	111.7		146.7	19.53	111.0
	136.7	2180.17	111.7		147.0	19.62	111.0
	137.0	2177.16	111.7		147.2	19.99	111.0
Initial Hydro-static	137.2	2176.87	111.7		147.5	20.03	111.0
	137.5	2176.71	111.7		147.7	20.07	111.0
	137.7	2203.37	111.7		148.0	19.79	111.0
Open To Flow (1)	138.0	16.02	111.1		148.2	20.16	111.0
	138.2	17.43	111.2		148.5	20.19	111.0
	138.5	17.56	111.1		148.7	19.91	111.1
	138.7	17.62	111.1		149.0	20.26	111.1
	139.0	17.73	111.1		149.2	20.31	111.1
	139.2	17.79	111.1		149.5	20.35	111.1
	139.5	17.87	111.0		149.7	20.39	111.1
	139.7	17.93	111.0		150.0	20.42	111.1
	140.0	18.00	111.0		150.2	20.15	111.1
	140.2	18.12	111.0		150.5	20.52	111.1
	140.5	17.89	111.0		150.7	20.24	111.1
	140.7	17.95	111.0		151.0	20.61	111.1
	141.0	18.03	111.0		151.2	20.65	111.1

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	151.5	20.68	111.1		161.7	21.79	111.2
	151.7	20.36	111.1		162.0	21.79	111.2
	152.0	20.40	111.1		162.2	21.80	111.2
	152.2	20.51	111.1		162.5	21.81	111.2
	152.5	20.86	111.1		162.7	21.82	111.2
	152.7	20.90	111.1		163.0	21.83	111.2
	153.0	20.95	111.1		163.2	21.84	111.2
	153.2	20.99	111.1		163.5	21.86	111.2
	153.5	21.04	111.1		163.7	21.88	111.2
	153.7	21.08	111.1		164.0	21.89	111.2
	154.0	21.12	111.1		164.2	21.91	111.2
	154.2	20.81	111.1		164.5	21.92	111.2
	154.5	21.19	111.1		164.7	21.93	111.2
	154.7	21.23	111.1		165.0	21.94	111.2
	155.0	21.26	111.1		165.2	21.95	111.2
	155.2	20.90	111.1		165.5	21.96	111.2
	155.5	21.34	111.1		165.7	21.98	111.2
	155.7	21.38	111.1		166.0	21.98	111.2
	156.0	21.41	111.1		166.2	22.01	111.2
	156.2	21.44	111.1		166.5	22.06	111.2
	156.5	21.47	111.1		166.7	22.13	111.3
	156.7	21.50	111.1		167.0	22.24	111.3
	157.0	21.53	111.1		167.2	21.98	111.3
	157.2	21.56	111.2		167.5	22.04	111.3
	157.5	21.58	111.2		167.7	22.04	111.3
	157.7	21.60	111.2		168.0	21.96	111.3
	158.0	21.63	111.2	Shut-in(1)	168.2	21.96	111.3
	158.2	21.65	111.2		168.5	22.05	111.3
	158.5	21.67	111.2		168.7	22.07	111.3
	158.7	21.69	111.2		169.0	22.08	111.3
	159.0	21.71	111.2		169.2	21.95	111.3
	159.2	21.72	111.2		169.5	22.17	111.3
	159.5	21.73	111.2		169.7	22.59	111.3
	159.7	21.74	111.2		170.0	22.99	111.3
	160.0	21.74	111.2		170.2	23.67	111.3
	160.2	21.74	111.2		170.5	23.91	111.3
	160.5	21.74	111.2		170.7	24.42	111.3
	160.7	21.75	111.2		171.0	24.97	111.3
	161.0	21.76	111.2		171.2	25.61	111.3
	161.2	21.77	111.2		171.5	26.21	111.3
	161.5	21.78	111.2		171.7	26.77	111.3

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	172.0	27.33	111.3		182.2	90.87	111.4
	172.2	28.09	111.3		182.5	94.37	111.5
	172.5	28.79	111.3		182.7	98.25	111.5
	172.7	29.47	111.3		183.0	102.15	111.5
	173.0	30.07	111.3		183.2	106.20	111.5
	173.2	30.92	111.3		183.5	110.36	111.5
	173.5	31.72	111.3		183.7	114.85	111.5
	173.7	32.39	111.3		184.0	119.35	111.5
	174.0	33.29	111.3		184.2	124.26	111.5
	174.2	34.15	111.3		184.5	129.26	111.5
	174.5	35.02	111.3		184.7	134.64	111.5
	174.7	35.83	111.3		185.0	140.16	111.5
	175.0	36.84	111.3		185.2	145.93	111.5
	175.2	37.71	111.3		185.5	152.08	111.5
	175.5	38.79	111.4		185.7	158.28	111.5
	175.7	39.80	111.4		186.0	164.88	111.5
	176.0	40.91	111.4		186.2	171.66	111.5
	176.2	42.01	111.4		186.5	178.60	111.5
	176.5	43.15	111.4		186.7	185.72	111.5
	176.7	44.36	111.4		187.0	193.30	111.5
	177.0	45.58	111.4		187.2	200.79	111.5
	177.2	46.88	111.4		187.5	208.45	111.6
	177.5	48.23	111.4		187.7	216.49	111.6
	177.7	49.74	111.4		188.0	224.43	111.6
	178.0	51.29	111.4		188.2	232.62	111.6
	178.2	52.61	111.4		188.5	240.62	111.6
	178.5	54.28	111.4		188.7	248.84	111.6
	178.7	56.07	111.4		189.0	257.43	111.6
	179.0	57.82	111.4		189.2	265.92	111.6
	179.2	59.77	111.4		189.5	274.53	111.6
	179.5	61.72	111.4		189.7	283.06	111.6
	179.7	63.85	111.4		190.0	291.49	111.6
	180.0	66.03	111.4		190.2	298.57	111.6
	180.2	68.24	111.4		190.5	305.54	111.6
	180.5	70.69	111.4		190.7	313.81	111.6
	180.7	73.14	111.4		191.0	320.29	111.6
	181.0	75.73	111.4		191.2	328.24	111.6
	181.2	78.46	111.4		191.5	336.97	111.6
	181.5	81.31	111.4		191.7	345.64	111.7
	181.7	84.33	111.4		192.0	354.49	111.7
	182.0	87.58	111.4		192.2	363.13	111.7

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	192.5	372.06	111.7		202.7	647.63	111.9
	192.7	380.88	111.7		203.0	652.45	111.9
	193.0	389.63	111.7		203.2	657.22	111.9
	193.2	398.14	111.7		203.5	661.79	111.9
	193.5	406.53	111.7		203.7	666.40	111.9
	193.7	414.65	111.7		204.0	670.90	111.9
	194.0	422.96	111.7		204.2	675.24	111.9
	194.2	430.83	111.7		204.5	679.56	111.9
	194.5	438.65	111.7		204.7	683.82	111.9
	194.7	446.49	111.7		205.0	688.02	111.9
	195.0	454.07	111.7		205.2	692.16	111.9
	195.2	461.57	111.7		205.5	696.24	111.9
	195.5	469.07	111.7		205.7	700.21	111.9
	195.7	476.27	111.7		206.0	704.18	111.9
	196.0	483.45	111.7		206.2	707.85	111.9
	196.2	490.79	111.7		206.5	711.69	111.9
	196.5	498.06	111.8		206.7	715.34	111.9
	196.7	505.33	111.8		207.0	719.20	111.9
	197.0	511.31	111.8		207.2	722.74	111.9
	197.2	518.46	111.8		207.5	726.25	111.9
	197.5	525.46	111.8		207.7	729.85	112.0
	197.7	532.27	111.8		208.0	733.25	112.0
	198.0	539.06	111.8		208.2	736.41	112.0
	198.2	545.82	111.8		208.5	739.88	112.0
	198.5	552.39	111.8		208.7	743.07	112.0
	198.7	558.85	111.8		209.0	746.45	112.0
	199.0	565.10	111.8		209.2	749.54	112.0
	199.2	571.33	111.8		209.5	752.72	112.0
	199.5	577.49	111.8		209.7	755.88	112.0
	199.7	583.51	111.8		210.0	758.88	112.0
	200.0	589.46	111.8		210.2	761.87	112.0
	200.2	595.04	111.8		210.5	764.82	112.0
	200.5	600.73	111.8		210.7	767.73	112.0
	200.7	606.35	111.8		211.0	770.64	112.0
	201.0	611.89	111.8		211.2	773.38	112.0
	201.2	617.34	111.8		211.5	776.27	112.0
	201.5	622.38	111.8		211.7	778.97	112.0
	201.7	627.55	111.9		212.0	781.59	112.0
	202.0	632.72	111.9		212.2	784.17	112.0
	202.2	637.76	111.9		212.5	786.83	112.0
	202.5	642.72	111.9		212.7	789.49	112.0

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	213.0	791.96	112.0		223.2	871.19	112.2
	213.2	794.55	112.0		223.5	872.74	112.2
	213.5	796.92	112.0		223.7	874.11	112.2
	213.7	799.40	112.0		224.0	875.64	112.2
	214.0	801.84	112.0		224.2	877.10	112.2
	214.2	804.05	112.0		224.5	878.39	112.2
	214.5	806.42	112.0		224.7	879.80	112.2
	214.7	808.66	112.0		225.0	881.14	112.2
	215.0	810.97	112.1		225.2	882.57	112.2
	215.2	813.18	112.1		225.5	883.89	112.2
	215.5	815.41	112.1		225.7	885.13	112.2
	215.7	817.55	112.1		226.0	886.46	112.2
	216.0	819.78	112.1		226.2	887.72	112.2
	216.2	821.73	112.1		226.5	889.04	112.2
	216.5	823.94	112.1		226.7	890.33	112.2
	216.7	826.04	112.1		227.0	891.48	112.2
	217.0	828.02	112.1		227.2	892.75	112.2
	217.2	830.04	112.1		227.5	894.08	112.2
	217.5	831.91	112.1	End Shut-In(1)	227.7	895.13	112.2
	217.7	833.93	112.1		228.0	824.70	112.2
	218.0	835.98	112.1	Open To Flow (2)	228.2	24.22	112.0
	218.2	837.84	112.1		228.5	24.44	112.0
	218.5	839.57	112.1		228.7	24.65	112.0
	218.7	841.50	112.1		229.0	27.29	112.0
	219.0	843.38	112.1		229.2	24.94	112.0
	219.2	845.18	112.1		229.5	26.89	112.0
	219.5	846.93	112.1		229.7	28.61	112.0
	219.7	848.74	112.1		230.0	30.59	112.0
	220.0	850.46	112.1		230.2	32.20	112.0
	220.2	852.16	112.1		230.5	34.18	112.0
	220.5	853.85	112.1		230.7	35.96	112.0
	220.7	855.60	112.1		231.0	37.88	112.0
	221.0	857.20	112.1		231.2	25.13	112.0
	221.2	858.99	112.1		231.5	26.66	112.0
	221.5	860.51	112.1		231.7	27.98	112.0
	221.7	861.97	112.1		232.0	29.26	112.0
	222.0	863.63	112.1		232.2	30.64	112.0
	222.2	865.13	112.1		232.5	31.99	112.0
	222.5	866.73	112.1		232.7	33.28	112.0
	222.7	868.20	112.2		233.0	34.69	112.0
	223.0	869.70	112.2		233.2	36.12	112.0

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	233.5	37.49	112.0		243.7	51.49	112.2
	233.7	39.03	112.0		244.0	48.82	112.2
	234.0	40.58	112.1		244.2	50.53	112.2
	234.2	42.30	112.1		244.5	52.18	112.2
	234.5	44.00	112.1		244.7	54.14	112.2
	234.7	45.88	112.1		245.0	55.89	112.2
	235.0	47.64	112.1		245.2	57.67	112.2
	235.2	49.62	112.1		245.5	59.78	112.2
	235.5	51.74	112.1		245.7	61.78	112.2
	235.7	53.70	112.1		246.0	63.84	112.2
	236.0	55.99	112.1		246.2	66.12	112.2
	236.2	58.35	112.1		246.5	68.43	112.2
	236.5	60.69	112.1		246.7	70.82	112.2
	236.7	63.32	112.1		247.0	73.31	112.2
	237.0	66.03	112.1		247.2	75.92	112.2
	237.2	68.80	112.1		247.5	78.64	112.2
	237.5	71.71	112.1		247.7	81.46	112.2
	237.7	74.82	112.1		248.0	84.41	112.2
	238.0	78.14	112.1		248.2	84.12	112.2
	238.2	81.50	112.1		248.5	66.65	112.2
	238.5	36.38	112.1		248.7	69.08	112.2
	238.7	38.14	112.1		249.0	71.57	112.2
	239.0	39.71	112.1		249.2	74.11	112.2
	239.2	41.23	112.1		249.5	76.76	112.2
	239.5	42.65	112.1		249.7	79.52	112.2
	239.7	44.24	112.1		250.0	82.32	112.3
	240.0	45.84	112.1		250.2	85.33	112.3
	240.2	47.51	112.1		250.5	43.26	112.2
	240.5	49.24	112.1		250.7	36.89	112.2
	240.7	51.00	112.1		251.0	38.50	112.2
	241.0	46.34	112.1		251.2	39.92	112.2
	241.2	48.00	112.1		251.5	41.24	112.3
	241.5	49.55	112.1		251.7	42.57	112.3
	241.7	51.33	112.1		252.0	43.79	112.3
	242.0	53.10	112.1		252.2	45.10	112.3
	242.2	54.96	112.2		252.5	46.54	112.3
	242.5	56.95	112.2		252.7	47.94	112.3
	242.7	58.94	112.2		253.0	49.34	112.3
	243.0	60.93	112.2		253.2	50.78	112.3
	243.2	63.27	112.2		253.5	52.22	112.3
	243.5	65.44	112.2		253.7	53.84	112.3

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	254.0	55.40	112.3		264.2	58.33	112.4
	254.2	57.09	112.3		264.5	59.79	112.4
	254.5	58.73	112.3		264.7	61.38	112.4
	254.7	60.55	112.3		265.0	62.91	112.4
	255.0	62.38	112.3		265.2	64.62	112.4
	255.2	64.38	112.3		265.5	66.33	112.4
	255.5	66.23	112.3		265.7	68.26	112.4
	255.7	68.22	112.3		266.0	69.98	112.4
	256.0	70.43	112.3		266.2	69.99	112.4
	256.2	72.57	112.3		266.5	71.87	112.4
	256.5	74.78	112.3		266.7	73.83	112.4
	256.7	77.07	112.3		267.0	75.84	112.4
	257.0	79.49	112.3		267.2	78.02	112.4
	257.2	81.99	112.3		267.5	80.13	112.4
	257.5	84.53	112.3		267.7	82.22	112.4
	257.7	87.08	112.3		268.0	84.56	112.4
	258.0	89.73	112.3		268.2	86.97	112.4
	258.2	31.85	112.3		268.5	89.35	112.4
	258.5	34.53	112.3		268.7	91.92	112.5
	258.7	35.93	112.3		269.0	94.49	112.5
	259.0	37.11	112.3		269.2	95.77	112.5
	259.2	38.30	112.3		269.5	98.53	112.5
	259.5	39.30	112.3		269.7	101.18	112.5
	259.7	40.30	112.3		270.0	104.17	112.5
	260.0	41.37	112.3		270.2	107.11	112.5
	260.2	42.52	112.3		270.5	86.22	112.5
	260.5	43.64	112.4		270.7	47.51	112.5
	260.7	44.84	112.4		271.0	49.31	112.5
	261.0	46.00	112.4		271.2	50.86	112.5
	261.2	47.11	112.4		271.5	52.27	112.5
	261.5	48.39	112.4		271.7	53.68	112.5
	261.7	49.66	112.4		272.0	55.13	112.5
	262.0	50.92	112.4		272.2	56.61	112.5
	262.2	52.16	112.4		272.5	58.12	112.5
	262.5	53.72	112.4		272.7	59.67	112.5
	262.7	55.19	112.4		273.0	61.30	112.5
	263.0	56.47	112.4		273.2	62.84	112.5
	263.2	57.99	112.4		273.5	64.60	112.5
	263.5	53.69	112.4		273.7	66.25	112.5
	263.7	55.41	112.4		274.0	68.01	112.5
	264.0	56.86	112.4		274.2	69.64	112.5

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	274.5	71.54	112.5		284.7	28.11	112.6
	274.7	73.48	112.5		285.0	28.15	112.6
	275.0	75.38	112.5		285.2	28.19	112.6
	275.2	77.42	112.5		285.5	28.21	112.6
	275.5	79.38	112.5		285.7	28.22	112.6
	275.7	81.50	112.5		286.0	28.23	112.6
	276.0	83.70	112.5		286.2	28.22	112.6
	276.2	81.08	112.5		286.5	28.24	112.6
	276.5	83.29	112.5		286.7	28.26	112.6
	276.7	85.46	112.5		287.0	28.27	112.6
	277.0	87.78	112.5		287.2	28.30	112.6
	277.2	90.21	112.5		287.5	28.32	112.6
	277.5	92.58	112.5		287.7	28.35	112.6
	277.7	95.15	112.5		288.0	28.37	112.6
	278.0	97.66	112.5		288.2	28.39	112.6
	278.2	100.33	112.6	Shut-in(2)	288.5	28.41	112.6
	278.5	103.21	112.6		288.7	27.82	112.7
	278.7	105.97	112.6		289.0	28.02	112.7
	279.0	108.76	112.6		289.2	28.45	112.7
	279.2	111.76	112.6		289.5	29.01	112.7
	279.5	114.44	112.6		289.7	29.24	112.7
	279.7	117.62	112.6		290.0	30.00	112.7
	280.0	120.77	112.6		290.2	30.23	112.7
	280.2	123.89	112.6		290.5	30.89	112.7
	280.5	127.27	112.6		290.7	31.11	112.7
	280.7	130.74	112.6		291.0	31.87	112.7
	281.0	134.27	112.6		291.2	32.34	112.7
	281.2	27.71	112.5		291.5	32.56	112.7
	281.5	27.68	112.6		291.7	33.32	112.7
	281.7	27.61	112.6		292.0	33.57	112.7
	282.0	27.59	112.6		292.2	34.33	112.7
	282.2	27.68	112.6		292.5	34.57	112.7
	282.5	27.79	112.6		292.7	35.13	112.7
	282.7	27.83	112.6		293.0	35.70	112.7
	283.0	27.87	112.6		293.2	36.26	112.7
	283.2	27.91	112.6		293.5	37.08	112.7
	283.5	27.98	112.6		293.7	37.32	112.7
	283.7	28.00	112.6		294.0	37.94	112.7
	284.0	28.02	112.6		294.2	38.59	112.7
	284.2	28.06	112.6		294.5	39.17	112.7
	284.5	28.08	112.6		294.7	39.85	112.7

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	295.0	40.43	112.7		305.2	82.08	112.8
	295.2	41.10	112.7		305.5	83.73	112.8
	295.5	41.73	112.7		305.7	85.40	112.8
	295.7	42.39	112.7		306.0	87.04	112.8
	296.0	43.15	112.7		306.2	88.72	112.8
	296.2	43.82	112.7		306.5	90.49	112.8
	296.5	44.55	112.7		306.7	92.20	112.8
	296.7	45.19	112.7		307.0	94.07	112.8
	297.0	45.97	112.7		307.2	95.99	112.8
	297.2	46.76	112.7		307.5	97.87	112.8
	297.5	47.55	112.7		307.7	99.92	112.8
	297.7	48.30	112.7		308.0	102.00	112.8
	298.0	49.07	112.7		308.2	103.97	112.8
	298.2	49.94	112.7		308.5	106.13	112.8
	298.5	50.81	112.7		308.7	108.37	112.8
	298.7	51.59	112.7		309.0	110.54	112.8
	299.0	52.56	112.7		309.2	112.88	112.8
	299.2	53.42	112.7		309.5	115.18	112.9
	299.5	54.25	112.8		309.7	117.64	112.9
	299.7	55.23	112.8		310.0	120.05	112.9
	300.0	56.16	112.8		310.2	122.54	112.9
	300.2	57.10	112.8		310.5	125.11	112.9
	300.5	58.10	112.8		310.7	127.69	112.9
	300.7	59.13	112.8		311.0	130.48	112.9
	301.0	60.15	112.8		311.2	133.16	112.9
	301.2	61.18	112.8		311.5	136.01	112.9
	301.5	62.27	112.8		311.7	138.81	112.9
	301.7	63.36	112.8		312.0	141.72	112.9
	302.0	64.60	112.8		312.2	144.71	112.9
	302.2	65.78	112.8		312.5	147.70	112.9
	302.5	67.00	112.8		312.7	150.78	112.9
	302.7	68.25	112.8		313.0	153.86	112.9
	303.0	69.38	112.8		313.2	157.11	112.9
	303.2	70.73	112.8		313.5	160.39	112.9
	303.5	72.00	112.8		313.7	163.67	112.9
	303.7	73.37	112.8		314.0	167.02	112.9
	304.0	74.67	112.8		314.2	170.44	112.9
	304.2	76.11	112.8		314.5	173.93	112.9
	304.5	77.56	112.8		314.7	177.35	112.9
	304.7	79.00	112.8		315.0	180.97	112.9
	305.0	80.56	112.8		315.2	184.63	112.9

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	315.5	188.32	112.9		325.7	355.69	113.1
	315.7	191.92	112.9		326.0	359.74	113.1
	316.0	195.66	112.9		326.2	363.71	113.1
	316.2	199.53	112.9		326.5	367.80	113.1
	316.5	203.30	112.9		326.7	371.79	113.1
	316.7	207.12	112.9		327.0	375.88	113.1
	317.0	210.95	112.9		327.2	379.86	113.1
	317.2	214.94	112.9		327.5	383.89	113.1
	317.5	218.81	113.0		327.7	387.81	113.1
	317.7	222.86	113.0		328.0	391.65	113.1
	318.0	226.86	113.0		328.2	395.55	113.1
	318.2	230.92	113.0		328.5	399.46	113.1
	318.5	234.94	113.0		328.7	403.37	113.1
	318.7	238.97	113.0		329.0	407.17	113.1
	319.0	243.07	113.0		329.2	410.90	113.1
	319.2	247.23	113.0		329.5	414.60	113.1
	319.5	251.32	113.0		329.7	418.46	113.1
	319.7	255.27	113.0		330.0	422.15	113.1
	320.0	259.55	113.0		330.2	425.87	113.1
	320.2	263.74	113.0		330.5	429.39	113.1
	320.5	267.89	113.0		330.7	433.12	113.1
	320.7	272.04	113.0		331.0	436.77	113.1
	321.0	276.24	113.0		331.2	440.30	113.1
	321.2	280.45	113.0		331.5	444.09	113.1
	321.5	284.64	113.0		331.7	444.32	113.1
	321.7	288.85	113.0		332.0	447.97	113.1
	322.0	292.95	113.0		332.2	451.73	113.1
	322.2	297.28	113.0		332.5	455.12	113.1
	322.5	301.51	113.0		332.7	458.71	113.1
	322.7	305.68	113.0		333.0	462.22	113.2
	323.0	309.84	113.0		333.2	465.62	113.2
	323.2	314.09	113.0		333.5	469.11	113.2
	323.5	318.37	113.0		333.7	472.35	113.2
	323.7	322.50	113.0		334.0	475.66	113.2
	324.0	326.53	113.0		334.2	478.93	113.2
	324.2	330.71	113.0		334.5	482.10	113.2
	324.5	334.89	113.0		334.7	485.35	113.2
	324.7	339.02	113.1		335.0	488.51	113.2
	325.0	343.22	113.1		335.2	491.72	113.2
	325.2	347.33	113.1		335.5	494.78	113.2
	325.5	351.43	113.1		335.7	497.86	113.2

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	336.0	500.99	113.2		346.2	603.63	113.3
	336.2	503.89	113.2		346.5	605.63	113.3
	336.5	506.88	113.2		346.7	607.48	113.3
	336.7	509.85	113.2		347.0	609.56	113.3
	337.0	512.81	113.2		347.2	611.50	113.3
	337.2	515.81	113.2		347.5	613.55	113.3
	337.5	518.59	113.2		347.7	615.34	113.3
	337.7	521.55	113.2		348.0	617.30	113.3
	338.0	524.30	113.2		348.2	619.21	113.3
	338.2	527.07	113.2		348.5	621.02	113.3
	338.5	529.89	113.2		348.7	622.81	113.3
	338.7	532.63	113.2		349.0	624.75	113.3
	339.0	535.46	113.2		349.2	626.66	113.3
	339.2	538.13	113.2		349.5	628.43	113.3
	339.5	540.77	113.2		349.7	630.24	113.3
	339.7	543.29	113.2		350.0	631.87	113.3
	340.0	545.98	113.2		350.2	633.69	113.3
	340.2	548.60	113.2		350.5	635.43	113.3
	340.5	551.15	113.2		350.7	637.22	113.3
	340.7	553.69	113.2		351.0	638.95	113.3
	341.0	556.10	113.2		351.2	640.46	113.3
	341.2	558.63	113.2		351.5	642.24	113.3
	341.5	561.02	113.2		351.7	643.85	113.3
	341.7	563.55	113.2		352.0	645.59	113.3
	342.0	565.91	113.2		352.2	647.15	113.3
	342.2	568.37	113.2		352.5	648.86	113.3
	342.5	570.70	113.3		352.7	650.38	113.3
	342.7	573.15	113.3		353.0	652.03	113.3
	343.0	575.44	113.3		353.2	653.57	113.3
	343.2	577.64	113.3		353.5	655.13	113.4
	343.5	579.93	113.3		353.7	656.68	113.4
	343.7	582.26	113.3		354.0	658.17	113.4
	344.0	584.47	113.3		354.2	659.77	113.4
	344.2	586.61	113.3		354.5	661.22	113.4
	344.5	588.82	113.3		354.7	662.68	113.4
	344.7	590.96	113.3		355.0	664.18	113.4
	345.0	593.14	113.3		355.2	665.67	113.4
	345.2	595.24	113.3		355.5	667.13	113.4
	345.5	597.41	113.3		355.7	668.49	113.4
	345.7	599.49	113.3		356.0	669.88	113.4
	346.0	601.45	113.3		356.2	671.40	113.4

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	356.5	672.77	113.4		366.7	721.38	113.5
	356.7	674.15	113.4		367.0	722.34	113.5
	357.0	675.61	113.4		367.2	723.30	113.5
	357.2	676.78	113.4		367.5	724.27	113.5
	357.5	678.26	113.4		367.7	725.26	113.5
	357.7	679.59	113.4		368.0	726.24	113.5
	358.0	681.01	113.4		368.2	727.22	113.5
	358.2	682.24	113.4		368.5	728.09	113.5
	358.5	683.61	113.4		368.7	729.14	113.5
	358.7	684.95	113.4		369.0	730.09	113.5
	359.0	686.18	113.4		369.2	731.03	113.5
	359.2	687.45	113.4		369.5	731.94	113.5
	359.5	688.66	113.4		369.7	732.83	113.5
	359.7	689.82	113.4		370.0	733.84	113.5
	360.0	691.17	113.4		370.2	734.67	113.5
	360.2	692.44	113.4		370.5	735.57	113.5
	360.5	693.61	113.4		370.7	736.53	113.5
	360.7	694.85	113.4		371.0	737.38	113.5
	361.0	696.04	113.4		371.2	738.21	113.5
	361.2	697.29	113.4		371.5	739.08	113.5
	361.5	698.44	113.4		371.7	740.00	113.5
	361.7	699.62	113.4		372.0	740.88	113.5
	362.0	700.86	113.4		372.2	741.66	113.5
	362.2	701.99	113.4		372.5	742.55	113.5
	362.5	703.14	113.4		372.7	743.37	113.5
	362.7	704.26	113.4		373.0	744.26	113.5
	363.0	705.45	113.4		373.2	745.15	113.5
	363.2	706.52	113.4		373.5	745.93	113.5
	363.5	707.60	113.4		373.7	746.72	113.5
	363.7	708.75	113.4		374.0	747.60	113.5
	364.0	709.85	113.4		374.2	748.33	113.5
	364.2	710.87	113.4		374.5	749.19	113.5
	364.5	712.01	113.4		374.7	750.00	113.5
	364.7	713.08	113.4		375.0	750.89	113.5
	365.0	714.08	113.4		375.2	751.63	113.5
	365.2	715.17	113.4		375.5	752.41	113.5
	365.5	716.18	113.4		375.7	753.17	113.5
	365.7	717.24	113.4		376.0	753.96	113.5
	366.0	718.21	113.5		376.2	754.68	113.5
	366.2	719.31	113.5		376.5	755.46	113.5
	366.5	720.30	113.5		376.7	756.22	113.5

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	377.0	756.93	113.5		387.2	784.22	113.6
	377.2	757.70	113.5		387.5	784.73	113.6
	377.5	758.48	113.5		387.7	785.29	113.6
	377.7	759.16	113.5		388.0	785.84	113.6
	378.0	759.95	113.5		388.2	786.38	113.6
	378.2	760.68	113.5		388.5	787.29	113.6
	378.5	761.45	113.5		388.7	787.52	113.6
	378.7	762.11	113.5		389.0	788.10	113.6
	379.0	762.89	113.5		389.2	788.64	113.6
	379.2	763.50	113.5		389.5	789.23	113.6
	379.5	764.24	113.5		389.7	790.06	113.6
	379.7	764.97	113.5		390.0	790.31	113.6
	380.0	765.66	113.6		390.2	791.14	113.6
	380.2	766.39	113.5		390.5	791.38	113.6
	380.5	766.99	113.6		390.7	792.24	113.6
	380.7	767.73	113.6		391.0	792.48	113.6
	381.0	768.41	113.6		391.2	793.05	113.6
	381.2	769.13	113.6		391.5	793.57	113.6
	381.5	769.77	113.6		391.7	794.41	113.6
	381.7	770.44	113.6		392.0	794.88	113.6
	382.0	771.05	113.6		392.2	795.10	113.6
	382.2	771.81	113.6		392.5	795.90	113.6
	382.5	772.37	113.6		392.7	796.11	113.6
	382.7	772.97	113.6		393.0	796.97	113.6
	383.0	773.72	113.6		393.2	797.21	113.6
	383.2	774.33	113.6		393.5	797.71	113.6
	383.5	775.01	113.6		393.7	798.47	113.6
	383.7	775.64	113.6		394.0	798.68	113.6
	384.0	776.21	113.6		394.2	799.22	113.6
	384.2	776.86	113.6		394.5	799.97	113.6
	384.5	777.54	113.6		394.7	800.41	113.6
	384.7	778.12	113.6		395.0	800.63	113.6
	385.0	778.68	113.6		395.2	801.18	113.7
	385.2	779.43	113.6		395.5	801.92	113.7
	385.5	779.99	113.6		395.7	802.34	113.7
	385.7	780.64	113.6		396.0	802.53	113.7
	386.0	781.21	113.6		396.2	803.04	113.7
	386.2	781.81	113.6		396.5	803.82	113.7
	386.5	782.38	113.6		396.7	804.03	113.7
	386.7	782.93	113.6		397.0	804.76	113.7
	387.0	783.51	113.6		397.2	805.13	113.7

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	397.5	805.34	113.7		407.7	822.62	113.7
	397.7	806.09	113.7		408.0	822.95	113.7
	398.0	806.34	113.7		408.2	823.53	113.7
	398.2	807.10	113.7		408.5	823.76	113.7
	398.5	807.29	113.7		408.7	820.60	113.7
	398.7	807.67	113.7		409.0	821.39	113.7
	399.0	808.16	113.7		409.2	821.61	113.7
	399.2	808.79	113.7		409.5	822.24	113.7
	399.5	809.03	113.7		409.7	822.43	113.7
	399.7	809.77	113.7		410.0	823.24	113.7
	400.0	810.00	113.7		410.2	823.48	113.7
	400.2	810.40	113.7		410.5	824.01	113.7
	400.5	810.79	113.7	End Shut-In(2)	410.7	824.16	113.7
	400.7	811.26	113.7		411.0	676.23	113.7
	401.0	811.74	113.7		411.2	642.53	113.7
	401.2	812.30	113.7		411.5	570.75	113.7
	401.5	812.47	113.7		411.7	2099.16	114.2
	401.7	813.26	113.7	Final Hydro-static	412.0	2117.68	114.1
	402.0	813.47	113.7		412.2	2106.46	114.1
	402.2	814.02	113.7		412.5	2100.95	114.2
	402.5	814.23	113.7		412.7	2108.30	114.2
	402.7	814.95	113.7		413.0	2110.35	114.2
	403.0	815.15	113.7		413.2	2108.41	114.2
	403.2	815.53	113.7		413.5	2106.73	114.3
	403.5	815.84	113.7		413.7	2107.99	114.2
	403.7	816.29	113.7		414.0	2053.42	114.2
	404.0	816.74	113.7		414.2	2201.83	114.3
	404.2	817.06	113.7		414.5	2178.50	114.3
	404.5	817.71	113.7		414.7	2156.85	114.3
	404.7	817.88	113.7		415.0	2141.51	114.3
	405.0	818.54	113.7		415.2	2125.41	114.3
	405.2	818.67	113.7		415.5	2113.95	114.3
	405.5	819.15	113.7		415.7	2104.81	114.3
	405.7	819.56	113.7		416.0	2100.60	114.3
	406.0	819.93	113.7		416.2	2110.30	114.3
	406.2	820.35	113.7		416.5	2111.03	114.3
	406.5	820.73	113.7		416.7	2110.08	114.3
	406.7	821.04	113.7		417.0	2110.03	114.3
	407.0	821.50	113.7		417.2	2109.88	114.3
	407.2	821.84	113.7		417.5	2109.94	114.3
	407.5	822.25	113.7		417.7	2109.83	114.3

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	418.0	2109.67	114.3		428.2	1922.21	111.9
	418.2	2109.44	114.3		428.5	2075.89	111.6
	418.5	2109.26	114.3		428.7	2074.41	111.5
	418.7	2109.00	114.3		429.0	2056.39	111.4
	419.0	2108.48	114.3		429.2	2042.69	111.4
	419.2	2108.38	114.3		429.5	1931.01	111.4
	419.5	2108.22	114.3		429.7	1901.95	111.2
	419.7	2109.07	114.3		430.0	1874.68	111.0
	420.0	2028.98	114.2		430.2	2018.50	110.7
	420.2	2124.49	114.3		430.5	2020.70	110.6
	420.5	2112.76	114.2		430.7	2003.87	110.6
	420.7	2110.08	114.2		431.0	1992.30	110.6
	421.0	2111.52	114.2		431.2	1941.66	110.5
	421.2	2181.22	114.2		431.5	1879.02	110.5
	421.5	2159.15	114.3		431.7	1845.06	110.3
	421.7	2141.14	114.3		432.0	2024.11	110.2
	422.0	2057.42	114.3		432.2	1982.32	109.9
	422.2	2053.99	114.2		432.5	1967.67	109.8
	422.5	2045.67	114.1		432.7	1952.43	109.8
	422.7	2056.47	114.0		433.0	1944.49	109.7
	423.0	2187.06	113.8		433.2	1864.09	109.7
	423.2	2161.44	113.6		433.5	1836.57	109.6
	423.5	2148.71	113.4		433.7	1809.43	109.4
	423.7	2134.97	113.4		434.0	1911.37	109.3
	424.0	2128.98	113.3		434.2	1927.33	109.1
	424.2	2156.53	113.3		434.5	1922.46	109.0
	424.5	2150.94	113.3		434.7	1906.55	108.9
	424.7	2134.18	113.2		435.0	1897.66	108.9
	425.0	2125.31	113.2		435.2	1805.48	108.8
	425.2	2124.39	113.2		435.5	1779.95	108.6
	425.5	2124.91	113.2		435.7	1750.39	108.5
	425.7	1991.42	113.2		436.0	1878.21	108.3
	426.0	1972.40	113.2		436.2	1876.64	108.2
	426.2	1967.11	113.0		436.5	1860.48	108.2
	426.5	2115.56	112.6		436.7	1852.11	108.1
	426.7	2123.03	112.4		437.0	1752.20	108.0
	427.0	2104.52	112.4		437.2	1733.37	107.7
	427.2	2089.76	112.3		437.5	1801.30	107.4
	427.5	2083.22	112.3		437.7	1826.82	107.2
	427.7	1932.02	112.2		438.0	1827.67	107.2
	428.0	1949.02	112.1		438.2	1812.10	107.1

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	438.5	1805.91	107.1		448.7	1531.80	101.2
	438.7	1734.70	107.1		449.0	1469.10	101.1
	439.0	1699.88	106.9		449.2	1450.25	101.0
	439.2	1684.15	106.8		449.5	1423.07	100.9
	439.5	1783.57	106.4		449.7	1497.52	100.6
	439.7	1787.41	106.3		450.0	1490.37	100.4
	440.0	1776.50	106.2		450.2	1496.26	100.4
	440.2	1762.90	106.1		450.5	1484.79	100.3
	440.5	1701.82	106.1		450.7	1418.64	100.3
	440.7	1676.03	106.0		451.0	1401.69	100.2
	441.0	1650.11	105.8		451.2	1376.14	99.9
	441.2	1737.37	105.5		451.5	1435.55	99.6
	441.5	1740.03	105.2		451.7	1453.42	99.5
	441.7	1725.51	105.1		452.0	1443.93	99.4
	442.0	1714.71	105.0		452.2	1435.04	99.4
	442.2	1646.44	105.0		452.5	1366.22	99.4
	442.5	1617.97	104.8		452.7	1344.38	99.2
	442.7	1602.21	104.6		453.0	1434.21	99.1
	443.0	1688.06	104.3		453.2	1407.16	99.0
	443.2	1691.63	104.1		453.5	1396.29	98.9
	443.5	1678.93	104.0		453.7	1342.47	98.8
	443.7	1668.20	104.0		454.0	1317.56	98.7
	444.0	1664.17	103.9		454.2	1294.45	98.5
	444.2	1589.85	103.9		454.5	1362.90	98.2
	444.5	1572.36	103.8		454.7	1361.20	98.0
	444.7	1694.85	103.6		455.0	1351.08	98.0
	445.0	1636.15	103.4		455.2	1344.73	98.0
	445.2	1639.15	103.4		455.5	1280.08	97.9
	445.5	1625.94	103.4		455.7	1265.28	97.8
	445.7	1556.61	103.3		456.0	1276.19	97.6
	446.0	1541.07	103.2		456.2	1315.84	97.3
	446.2	1515.03	102.8		456.5	1307.48	97.3
	446.5	1572.10	102.6		456.7	1300.96	97.3
	446.7	1596.89	102.4		457.0	1299.89	97.2
	447.0	1585.06	102.3		457.2	1299.93	97.2
	447.2	1574.68	102.2		457.5	1299.24	97.2
	447.5	1500.09	102.2		457.7	1298.90	97.2
	447.7	1483.08	101.9		458.0	1298.60	97.2
	448.0	1459.52	101.7		458.2	1298.79	97.2
	448.2	1543.63	101.4		458.5	1298.52	97.2
	448.5	1543.81	101.2		458.7	1298.28	97.2

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	459.0	1298.07	97.2		469.2	1095.98	95.4
	459.2	1298.04	97.2		469.5	1079.22	95.2
	459.5	1297.86	97.2		469.7	1125.95	95.0
	459.7	1297.70	97.2		470.0	1122.12	94.9
	460.0	1297.63	97.2		470.2	1116.93	94.9
	460.2	1297.46	97.2		470.5	1070.15	94.8
	460.5	1297.35	97.2		470.7	1052.77	94.7
	460.7	1297.23	97.2		471.0	1053.94	94.5
	461.0	1297.13	97.1		471.2	1078.70	94.4
	461.2	1297.01	97.1		471.5	1076.08	94.3
	461.5	1296.64	97.1		471.7	1071.19	94.3
	461.7	1296.60	97.1		472.0	1034.69	94.3
	462.0	1296.55	97.1		472.2	1015.62	94.2
	462.2	1296.53	97.1		472.5	1002.91	94.0
	462.5	1296.52	97.1		472.7	1031.23	93.8
	462.7	1296.45	97.2		473.0	1028.34	93.7
	463.0	1251.52	97.2		473.2	1025.64	93.6
	463.2	1229.73	97.2		473.5	994.11	93.6
	463.5	1209.10	97.2		473.7	975.79	93.6
	463.7	1266.69	97.0		474.0	956.40	93.4
	464.0	1263.53	96.9		474.2	984.58	93.2
	464.2	1256.02	96.8		474.5	982.75	93.2
	464.5	1252.94	96.8		474.7	979.57	93.2
	464.7	1253.15	96.8		475.0	937.67	93.1
	465.0	1252.52	96.8		475.2	928.51	93.1
	465.2	1252.29	96.8		475.5	907.47	93.0
	465.5	1205.83	96.8		475.7	937.27	92.8
	465.7	1188.07	96.7		476.0	935.55	92.6
	466.0	1164.16	96.5		476.2	931.92	92.5
	466.2	1255.58	96.2		476.5	894.37	92.5
	466.5	1216.53	96.1		476.7	873.31	92.5
	466.7	1217.92	96.1		477.0	868.16	92.5
	467.0	1210.38	96.0		477.2	889.93	92.4
	467.2	1206.40	96.0		477.5	888.36	92.3
	467.5	1152.26	96.0		477.7	885.09	92.3
	467.7	1140.22	96.0		478.0	845.78	92.3
	468.0	1123.76	95.8		478.2	823.03	92.2
	468.2	1173.09	95.6		478.5	864.59	92.0
	468.5	1169.12	95.6		478.7	844.32	91.4
	468.7	1163.12	95.5		479.0	844.52	91.2
	469.0	1111.80	95.5		479.2	841.42	91.1

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	479.5	839.87	91.1		489.7	503.61	86.7
	479.7	839.93	91.0		490.0	518.76	86.6
	480.0	799.74	91.0		490.2	518.83	86.6
	480.2	779.01	90.9		490.5	517.61	86.6
	480.5	789.76	90.7		490.7	493.84	86.6
	480.7	797.51	90.5		491.0	479.78	86.5
	481.0	796.06	90.4		491.2	463.11	86.5
	481.2	793.56	90.3		491.5	470.47	86.5
	481.5	772.72	90.3		491.7	472.55	86.4
	481.7	740.87	90.1		492.0	471.48	86.4
	482.0	742.16	89.9		492.2	470.57	86.4
	482.2	752.49	89.6		492.5	440.87	86.4
	482.5	751.50	89.4		492.7	423.73	86.4
	482.7	749.59	89.4		493.0	435.54	86.5
	483.0	710.05	89.3		493.2	426.84	86.5
	483.2	698.45	89.2		493.5	426.17	86.5
	483.5	678.35	89.0		493.7	424.96	86.5
	483.7	706.19	88.8		494.0	397.09	86.5
	484.0	706.18	88.6		494.2	378.43	86.5
	484.2	703.60	88.6		494.5	378.54	86.6
	484.5	702.56	88.6		494.7	380.86	86.7
	484.7	667.59	88.5		495.0	380.70	86.7
	485.0	648.00	88.4		495.2	379.21	86.7
	485.2	644.23	88.4		495.5	348.33	86.7
	485.5	659.17	88.2		495.7	326.45	86.8
	485.7	658.14	88.1		496.0	336.24	86.9
	486.0	656.11	88.0		496.2	335.09	87.0
	486.2	639.29	88.0		496.5	334.47	87.1
	486.5	612.21	87.9		496.7	333.32	87.1
	486.7	594.13	87.7		497.0	307.64	87.1
	487.0	612.59	87.5		497.2	288.55	87.1
	487.2	611.99	87.4		497.5	278.01	87.3
	487.5	610.46	87.4		497.7	288.33	87.5
	487.7	597.99	87.3		498.0	288.20	87.5
	488.0	570.54	87.3		498.2	286.85	87.5
	488.2	547.99	87.2		498.5	269.05	87.5
	488.5	565.64	87.0		498.7	251.39	87.6
	488.7	565.45	86.9		499.0	233.25	87.7
	489.0	564.60	86.8		499.2	245.25	88.0
	489.2	548.83	86.8		499.5	242.47	88.1
	489.5	529.33	86.7		499.7	241.44	88.2

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	500.0	241.42	88.2		510.2	147.81	89.6
	500.2	240.40	88.2		510.5	147.85	89.6
	500.5	227.17	88.2		510.7	143.77	89.6
	500.7	206.92	88.2		511.0	123.65	89.5
	501.0	190.83	88.4		511.2	97.10	89.5
	501.2	204.14	88.7		511.5	88.76	89.7
	501.5	194.55	88.9		511.7	101.97	90.0
	501.7	193.78	88.9		512.0	102.24	90.0
	502.0	193.64	88.9		512.2	102.33	90.1
	502.2	193.48	88.9		512.5	102.43	90.1
	502.5	193.41	89.0		512.7	102.62	90.1
	502.7	193.36	89.0		513.0	102.29	90.1
	503.0	193.35	89.0		513.2	102.63	90.1
	503.2	193.32	89.0		513.5	102.64	90.1
	503.5	193.92	89.0		513.7	102.63	90.1
	503.7	195.07	89.0		514.0	102.94	90.1
	504.0	193.72	89.0		514.2	102.55	90.1
	504.2	193.42	89.0		514.5	102.54	90.1
	504.5	193.32	89.0		514.7	102.54	90.1
	504.7	193.24	89.0		515.0	102.53	90.1
	505.0	193.26	89.0		515.2	102.57	90.1
	505.2	193.25	89.0		515.5	102.58	90.1
	505.5	193.25	89.0		515.7	102.64	90.1
	505.7	193.31	89.0		516.0	84.56	90.1
	506.0	193.44	89.0		516.2	59.32	90.2
	506.2	181.37	89.0		516.5	44.22	90.6
	506.5	161.71	89.0		516.7	57.45	91.1
	506.7	131.14	89.0		517.0	57.66	91.3
	507.0	128.10	89.2		517.2	57.79	91.4
	507.2	146.86	89.4		517.5	57.81	91.4
	507.5	160.16	89.4		517.7	57.83	91.5
	507.7	144.28	89.5		518.0	57.80	91.5
	508.0	147.88	89.5		518.2	57.82	91.5
	508.2	147.64	89.5		518.5	57.84	91.5
	508.5	147.42	89.5		518.7	57.87	91.5
	508.7	147.84	89.5		519.0	57.98	91.5
	509.0	147.81	89.5		519.2	55.45	91.5
	509.2	147.77	89.5		519.5	39.29	91.5
	509.5	147.76	89.5		519.7	22.01	91.7
	509.7	147.76	89.5		520.0	15.87	92.5
	510.0	147.78	89.5		520.2	17.65	92.9

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	520.5	17.65	93.0		530.7	12.90	93.5
	520.7	14.99	93.0		531.0	12.90	93.5
	521.0	14.47	93.1		531.2	12.95	93.5
	521.2	14.57	93.2		531.5	12.95	93.5
	521.5	14.69	93.3		531.7	12.94	93.5
	521.7	13.11	93.3		532.0	12.90	93.5
	522.0	13.13	93.3		532.2	12.87	93.5
	522.2	14.44	93.4		532.5	12.86	93.5
	522.5	12.26	93.4		532.7	12.84	93.5
	522.7	12.87	93.5		533.0	12.84	93.5
	523.0	12.84	93.5		533.2	12.84	93.5
	523.2	12.83	93.5		533.5	12.84	93.5
	523.5	12.81	93.5		533.7	12.84	93.5
	523.7	11.17	93.5		534.0	12.84	93.5
	524.0	10.64	93.4		534.2	12.84	93.5
	524.2	10.48	93.4		534.5	12.84	93.5
	524.5	10.36	93.4		534.7	12.84	93.5
	524.7	10.36	93.4		535.0	12.85	93.5
	525.0	10.35	93.4		535.2	12.85	93.5
	525.2	10.36	93.4		535.5	12.85	93.5
	525.5	10.37	93.4		535.7	12.84	93.5
	525.7	10.36	93.4		536.0	12.84	93.5
	526.0	10.38	93.4		536.2	12.84	93.5
	526.2	10.39	93.5		536.5	12.86	93.5
	526.5	10.39	93.5		536.7	12.87	93.5
	526.7	10.39	93.5		537.0	11.17	93.5
	527.0	10.39	93.5		537.2	10.94	93.5
	527.2	10.39	93.5		537.5	10.90	93.4
	527.5	10.39	93.5		537.7	9.74	93.4
	527.7	10.39	93.5		538.0	9.71	93.4
	528.0	10.39	93.5		538.2	9.78	93.4
	528.2	10.39	93.5		538.5	9.81	93.4
	528.5	10.39	93.5		538.7	9.82	93.4
	528.7	10.38	93.5		539.0	9.82	93.4
	529.0	10.38	93.5		539.2	9.81	93.4
	529.2	10.40	93.5		539.5	9.81	93.4
	529.5	10.38	93.5		539.7	9.79	93.4
	529.7	10.37	93.5		540.0	9.80	93.4
	530.0	10.36	93.5		540.2	9.79	93.4
	530.2	10.39	93.5		540.5	9.79	93.4
	530.5	11.29	93.5		540.7	9.78	93.5

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	541.0	9.80	93.4		551.2	-1.62	101.5
	541.2	9.79	93.5		551.5	-1.61	102.1
	541.5	9.81	93.4		551.7	-1.59	102.5
	541.7	9.76	93.5		552.0	-1.58	103.0
	542.0	6.89	93.5		552.2	-1.57	103.3
	542.2	6.63	93.5		552.5	-1.56	103.8
	542.5	6.64	93.5		552.7	-1.55	104.2
	542.7	6.62	93.6		553.0	-1.55	104.7
	543.0	6.70	93.6		553.2	-1.54	105.1
	543.2	5.21	93.6		553.5	-1.54	105.4
	543.5	3.47	93.6		553.7	-1.54	105.7
	543.7	3.45	93.5		554.0	-1.54	106.0
	544.0	3.45	93.5		554.2	-1.53	106.3
	544.2	2.07	93.6		554.5	-1.52	106.6
	544.5	1.98	93.8		554.7	-1.51	106.8
	544.7	1.94	93.9		555.0	-1.51	107.2
	545.0	1.92	93.9		555.2	-1.51	107.4
	545.2	0.11	94.0		555.5	-1.51	107.7
	545.5	-0.90	94.6		555.7	-1.51	107.9
	545.7	-0.89	95.1		556.0	-1.51	108.0
	546.0	-0.86	95.4		556.2	-1.50	108.3
	546.2	-1.72	95.9		556.5	-1.50	108.6
	546.5	-1.90	96.0		556.7	-1.50	108.8
	546.7	-1.82	96.0		557.0	-1.49	109.0
	547.0	-2.36	95.7		557.2	-1.49	109.1
	547.2	-2.43	95.3		557.5	-1.49	109.1
	547.5	-2.45	94.7		557.7	-1.48	109.1
	547.7	-2.44	94.1		558.0	-1.51	109.2
	548.0	-2.47	93.6		558.2	-1.53	109.1
	548.2	-2.52	93.2		558.5	-1.56	109.2
	548.5	-1.94	92.9		558.7	-1.58	109.4
	548.7	-1.99	98.1		559.0	-1.60	109.5
	549.0	-2.16	97.5		559.2	-1.62	109.5
	549.2	-1.66	97.0		559.5	-1.64	109.5
	549.5	-1.65	97.4		559.7	-1.65	109.6
	549.7	-1.66	98.0		560.0	-1.68	109.7
	550.0	-1.68	98.6		560.2	-1.70	109.8
	550.2	-1.68	99.2		560.5	-1.47	109.9
	550.5	-1.66	99.8		560.7	-1.46	110.1
	550.7	-1.65	100.3		561.0	-1.46	109.9
	551.0	-1.63	100.9		561.2	-1.82	109.8

Printing every 1 samples

<b>Serial # 8351 Inside</b>				<b>Serial # 8017 Inside</b>			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	561.5	-1.83	109.9				
	561.7	-1.90	109.6				
	562.0	-1.82	109.0				
	562.2	-1.77	108.4				
	562.5	-1.69	108.1				
	562.7	-1.80	107.9				
	563.0	-1.66	107.7				
	563.2	-1.83	107.6				
	563.5	-1.82	107.9				

Printing every 1 samples



**Weatherford®**  
**Completion Systems**

**DRILL STEM TESTING - DATA LISTING**

EOG Resources

**LaRue 11-#1**

Oklahoma City, OK

**S.11-22s-34wFinney**

Job Ticket: 31372

**DST#: 1**

ATTN: Gary Brock

Test Start: 2008.08.02 @ 06:36:15

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	0.0	0.69	71.4		0.6	0.58	72.3
	0.0	0.61	71.4		0.6	0.58	72.3
	0.0	0.63	71.4		0.6	0.59	72.4
	0.1	0.62	71.4		0.6	0.59	72.4
	0.1	0.62	71.4		0.6	0.59	72.4
	0.1	0.62	71.4		0.6	0.59	72.4
	0.1	0.61	71.4		0.6	0.59	72.4
	0.1	0.60	71.4		0.7	0.60	72.5
	0.1	0.60	71.5		0.7	0.60	72.5
	0.2	0.58	71.5		0.7	0.61	72.5
	0.2	0.57	71.5		0.7	0.61	72.5
	0.2	0.57	71.5		0.7	0.61	72.5
	0.2	0.57	71.5		0.8	0.61	72.5
	0.2	0.57	71.5		0.8	0.62	72.5
	0.2	0.57	71.5		0.8	0.63	72.5
	0.3	0.57	71.5		0.8	0.63	72.5
	0.3	0.57	71.6		0.8	0.64	72.5
	0.3	0.57	71.6		0.8	0.64	72.5
	0.3	0.57	71.6		0.9	0.63	72.5
	0.3	0.57	71.7		0.9	0.64	72.5
	0.3	0.58	71.7		0.9	0.65	72.5
	0.3	0.57	71.8		0.9	0.65	72.5
	0.4	0.57	71.9		0.9	0.66	72.5
	0.4	0.58	71.9		0.9	0.65	72.5
	0.4	0.57	72.0		0.9	0.65	72.4
	0.4	0.57	72.1		1.0	0.65	72.4
	0.4	0.57	72.1		1.0	0.66	72.4
	0.4	0.58	72.2		1.0	0.66	72.4
	0.5	0.57	72.2		1.0	0.66	72.4
	0.5	0.57	72.2		1.0	0.67	72.4
	0.5	0.57	72.3		1.0	0.67	72.4
	0.5	0.58	72.3		1.1	0.67	72.4
	0.5	0.58	72.3		1.1	0.68	72.4

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	1.1	0.68	72.4		1.8	0.69	71.9
	1.1	0.68	72.4		1.8	0.69	71.9
	1.1	0.68	72.4		1.8	0.70	71.9
	1.1	0.68	72.4		1.8	0.71	71.9
	1.2	0.69	72.3		1.9	0.73	71.9
	1.2	0.69	72.3		1.9	0.76	71.8
	1.2	0.69	72.3		1.9	0.79	71.8
	1.2	0.70	72.3		1.9	0.80	71.8
	1.2	0.70	72.3		1.9	0.81	71.8
	1.3	0.69	72.3		1.9	0.83	71.7
	1.3	0.69	72.3		2.0	0.84	71.7
	1.3	0.69	72.3		2.0	0.87	71.7
	1.3	0.69	72.3		2.0	0.89	71.7
	1.3	0.69	72.3		7.0	0.93	68.6
	1.3	0.69	72.3		12.0	0.95	66.8
	1.4	0.70	72.3		17.0	0.97	67.8
	1.4	0.70	72.3		22.0	1.00	69.9
	1.4	0.70	72.2		27.0	1.03	71.9
	1.4	0.70	72.2		32.0	1.05	73.0
	1.4	0.70	72.2		37.0	1.05	74.4
	1.4	0.70	72.2		42.0	44.09	88.0
	1.5	0.70	72.2		47.0	163.49	92.8
	1.5	0.70	72.2		52.0	381.64	94.7
	1.5	0.71	72.2		57.0	640.06	96.2
	1.5	0.71	72.2		62.0	708.08	97.7
	1.5	0.71	72.2		67.0	848.40	97.8
	1.5	0.71	72.2		72.0	986.41	100.0
	1.5	0.72	72.2		77.0	1123.77	100.2
	1.6	0.72	72.2		82.0	1263.73	101.0
	1.6	0.72	72.1		87.0	1403.63	102.3
	1.6	0.73	72.1		87.2	1468.53	102.4
	1.6	0.73	72.1		87.5	1479.19	102.4
	1.6	0.72	72.1		87.7	1514.69	102.5
	1.6	0.72	72.1		88.0	1436.44	102.6
	1.7	0.72	72.1		88.2	1454.05	102.7
	1.7	0.71	72.1		88.5	1450.31	102.7
	1.7	0.71	72.0		88.7	1449.13	102.7
	1.7	0.70	72.0		89.0	1464.83	102.7
	1.7	0.70	72.0		89.2	1527.12	102.8
	1.8	0.69	72.0		89.5	1657.07	102.9
	1.8	0.68	72.0		89.7	1509.88	103.0

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	90.0	1500.28	103.1		100.2	1824.34	106.1
	90.2	1497.44	103.1		100.5	2067.36	106.2
	90.5	1496.21	103.2		100.7	1792.09	106.3
	90.7	1565.38	103.2		101.0	1785.85	106.4
	91.0	1576.97	103.3		101.2	1782.89	106.5
	91.2	1623.98	103.5		101.5	1781.08	106.5
	91.5	1545.65	103.6		101.7	1876.46	106.6
	91.7	1547.64	103.7		102.0	2068.57	106.8
	92.0	1544.87	103.7		102.2	1847.25	106.9
	92.2	1543.45	103.7		102.5	1833.83	107.1
	92.5	1542.34	103.7		102.7	1830.14	107.1
	92.7	1541.51	103.7		103.0	1828.49	107.1
	93.0	1550.56	103.8		103.2	1860.98	107.1
	93.2	1561.50	103.8		103.5	1839.75	107.1
	93.5	1614.06	103.8		103.7	1937.90	107.2
	93.7	1671.14	103.9		104.0	2090.04	107.4
	94.0	1593.06	104.1		104.2	1890.94	107.6
	94.2	1595.63	104.3		104.5	1881.09	107.7
	94.5	1592.44	104.4		104.7	1877.56	107.7
	94.7	1590.86	104.4		105.0	1875.74	107.8
	95.0	1612.02	104.4		105.2	1874.26	107.8
	95.2	1685.08	104.5		105.5	1897.26	107.8
	95.5	1871.67	104.6		105.7	1988.87	107.9
	95.7	1647.68	104.8		106.0	2011.24	108.0
	96.0	1642.35	104.9		106.2	1922.09	108.0
	96.2	1640.01	104.9		106.5	1931.30	108.2
	96.5	1638.67	105.0		106.7	1925.28	108.2
	96.7	1729.35	105.0		107.0	1922.89	108.2
	97.0	1802.41	105.1		107.2	1921.39	108.3
	97.2	1711.02	105.1		107.5	2005.25	108.3
	97.5	1691.24	105.3		107.7	2058.16	108.3
	97.7	1687.80	105.4		108.0	2203.04	108.5
	98.0	1685.97	105.4		108.2	1981.74	108.6
	98.2	1705.53	105.4		108.5	1973.96	108.7
	98.5	1770.23	105.5		108.7	1971.08	108.8
	98.7	1833.07	105.5		109.0	1969.35	108.8
	99.0	1762.46	105.7		109.2	2009.98	108.8
	99.2	1739.53	105.9		109.5	2090.23	108.9
	99.5	1735.44	106.0		109.7	2175.55	109.1
	99.7	1733.62	106.0		110.0	2032.60	109.3
	100.0	1760.58	106.1		110.2	2024.13	109.4

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	110.5	2020.31	109.4		120.7	2140.64	110.7
	110.7	2018.25	109.4		121.0	2138.71	110.7
	111.0	2079.63	109.4		121.2	2160.68	110.7
	111.2	2145.03	109.5		121.5	2321.88	110.8
	111.5	2301.11	109.7		121.7	2173.59	111.0
	111.7	2081.29	109.7		122.0	2162.61	111.1
	112.0	2070.50	109.7		122.2	2157.90	111.1
	112.2	2066.57	109.8		122.5	2155.54	111.1
	112.5	2065.43	109.8		122.7	2058.19	111.1
	112.7	2108.49	109.8		123.0	2281.58	111.2
	113.0	2198.37	109.9		123.2	2184.00	111.3
	113.2	2307.37	110.2		123.5	2175.60	111.3
	113.5	2129.41	110.4		123.7	2172.11	111.3
	113.7	2118.07	110.5		124.0	2169.90	111.3
	114.0	2113.30	110.5		124.2	2168.38	111.3
	114.2	2110.90	110.5		124.5	2167.41	111.3
	114.5	2109.31	110.5		124.7	2281.58	111.4
	114.7	2108.07	110.5		125.0	2142.91	111.4
	115.0	2107.14	110.5		125.2	2197.31	111.5
	115.2	2106.13	110.5		125.5	2190.26	111.5
	115.5	2105.37	110.5		125.7	2187.22	111.5
	115.7	2104.76	110.5		126.0	2184.86	111.5
	116.0	2103.86	110.5		126.2	2183.41	111.5
	116.2	2103.61	110.5		126.5	2182.39	111.5
	116.5	2102.86	110.5		126.7	2181.49	111.5
	116.7	2102.67	110.5		127.0	2180.78	111.5
	117.0	2102.28	110.5		127.2	2180.02	111.5
	117.2	2101.68	110.5		127.5	2179.77	111.5
	117.5	2101.58	110.5		127.7	2179.29	111.5
	117.7	2101.46	110.5		128.0	2178.90	111.5
	118.0	2010.63	110.5		128.2	2178.65	111.5
	118.2	2197.19	110.6		128.5	2178.30	111.5
	118.5	2135.36	110.6		128.7	2178.03	111.5
	118.7	2127.86	110.5		129.0	2177.78	111.5
	119.0	2124.89	110.5		129.2	2177.53	111.5
	119.2	2123.04	110.5		129.5	2177.20	111.5
	119.5	2121.73	110.5		129.7	2177.04	111.5
	119.7	2120.66	110.5		130.0	2176.79	111.5
	120.0	2149.83	110.5		130.2	2176.57	111.5
	120.2	2150.80	110.6		130.5	2176.41	111.5
	120.5	2143.73	110.7		130.7	2176.09	111.5

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	131.0	2175.89	111.5		141.2	20.85	110.8
	131.2	2175.67	111.5		141.5	20.85	110.8
	131.5	2175.54	111.5		141.7	21.00	110.8
	131.7	2175.38	111.5		142.0	21.17	110.8
	132.0	2175.19	111.5		142.2	21.26	110.8
	132.2	2175.04	111.5		142.5	21.60	110.8
	132.5	2174.61	111.5		142.7	21.62	110.8
	132.7	2174.52	111.5		143.0	21.65	110.8
	133.0	2174.40	111.5		143.2	21.67	110.8
	133.2	2174.26	111.5		143.5	21.69	110.8
	133.5	2185.16	111.5		143.7	21.71	110.8
	133.7	2275.58	111.6		144.0	21.74	110.8
	134.0	2230.37	111.5		144.2	21.80	110.8
	134.2	2228.19	111.6		144.5	21.89	110.8
	134.5	2216.67	111.6		144.7	22.89	110.8
	134.7	2201.92	111.6		145.0	23.10	110.9
	135.0	2189.81	111.6		145.2	23.72	110.9
	135.2	2192.55	111.7		145.5	23.91	110.9
	135.5	2186.02	111.7		145.7	24.03	110.9
	135.7	2184.42	111.7		146.0	23.88	110.9
	136.0	2185.05	111.7		146.2	24.00	110.9
	136.2	2183.44	111.7		146.5	24.41	110.9
	136.5	2184.13	111.7		146.7	24.11	110.9
	136.7	2185.05	111.7		147.0	24.55	110.9
	137.0	2181.78	111.7		147.2	24.65	110.9
	137.2	2180.86	111.7		147.5	24.76	110.9
	137.5	2180.77	111.7		147.7	25.01	110.9
	137.7	2186.12	111.7		148.0	22.57	110.9
	138.0	18.50	110.8		148.2	22.68	110.9
	138.2	20.22	111.1		148.5	22.78	110.9
	138.5	20.40	111.0		148.7	22.83	110.9
	138.7	20.48	110.9		149.0	22.88	110.9
	139.0	20.53	110.9		149.2	22.92	110.9
	139.2	20.62	110.8		149.5	22.98	111.0
	139.5	20.71	110.8		149.7	23.04	111.0
	139.7	20.75	110.8		150.0	23.10	111.0
	140.0	20.86	110.8		150.2	23.16	111.0
	140.2	20.98	110.8		150.5	23.20	111.0
	140.5	21.09	110.8		150.7	23.24	111.0
	140.7	20.78	110.8		151.0	23.26	111.0
	141.0	20.88	110.8		151.2	23.28	111.0

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	151.5	23.28	111.0		161.7	24.23	111.1
	151.7	23.29	111.0		162.0	24.25	111.1
	152.0	23.29	111.0		162.2	24.27	111.1
	152.2	23.29	111.0		162.5	24.30	111.1
	152.5	23.30	111.0		162.7	24.32	111.1
	152.7	23.31	111.0		163.0	24.35	111.1
	153.0	23.31	111.0		163.2	24.37	111.2
	153.2	23.33	111.0		163.5	24.39	111.2
	153.5	23.35	111.0		163.7	24.42	111.2
	153.7	23.37	111.0		164.0	24.43	111.2
	154.0	23.39	111.0		164.2	24.45	111.2
	154.2	23.42	111.0		164.5	24.47	111.2
	154.5	23.44	111.0		164.7	24.49	111.2
	154.7	23.47	111.0		165.0	24.51	111.2
	155.0	23.50	111.0		165.2	24.52	111.2
	155.2	23.53	111.0		165.5	24.54	111.2
	155.5	23.25	111.0		165.7	24.57	111.2
	155.7	23.61	111.0		166.0	24.59	111.2
	156.0	23.64	111.0		166.2	24.60	111.2
	156.2	23.68	111.1		166.5	24.62	111.2
	156.5	23.72	111.1		166.7	24.67	111.2
	156.7	23.75	111.1		167.0	24.68	111.2
	157.0	23.80	111.1		167.2	24.69	111.2
	157.2	23.83	111.1		167.5	24.71	111.2
	157.5	23.86	111.1		167.7	24.72	111.2
	157.7	23.89	111.1		168.0	24.73	111.2
	158.0	23.91	111.1		168.2	24.75	111.2
	158.2	23.95	111.1		168.5	24.78	111.2
	158.5	23.97	111.1		168.7	24.80	111.2
	158.7	24.00	111.1		169.0	24.83	111.2
	159.0	24.02	111.1		169.2	24.85	111.2
	159.2	24.04	111.1		169.5	24.90	111.2
	159.5	24.07	111.1		169.7	25.00	111.2
	159.7	24.09	111.1		170.0	25.17	111.2
	160.0	24.10	111.1		170.2	25.75	111.2
	160.2	24.12	111.1		170.5	26.29	111.2
	160.5	24.13	111.1		170.7	26.87	111.2
	160.7	24.15	111.1		171.0	27.65	111.2
	161.0	24.17	111.1		171.2	28.30	111.3
	161.2	24.18	111.1		171.5	28.84	111.3
	161.5	24.20	111.1		171.7	29.45	111.3

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	172.0	30.18	111.3		182.2	90.29	111.4
	172.2	30.82	111.3		182.5	93.69	111.4
	172.5	31.50	111.3		182.7	97.38	111.4
	172.7	32.23	111.3		183.0	101.17	111.4
	173.0	33.00	111.3		183.2	105.17	111.4
	173.2	33.72	111.3		183.5	109.35	111.4
	173.5	34.35	111.3		183.7	113.75	111.5
	173.7	35.16	111.3		184.0	118.26	111.5
	174.0	35.88	111.3		184.2	122.93	111.5
	174.2	36.84	111.3		184.5	127.98	111.5
	174.5	37.69	111.3		184.7	133.16	111.5
	174.7	38.55	111.3		185.0	139.26	111.5
	175.0	39.43	111.3		185.2	144.14	111.5
	175.2	40.47	111.3		185.5	150.05	111.5
	175.5	41.30	111.3		185.7	156.33	111.5
	175.7	42.24	111.3		186.0	163.90	111.5
	176.0	43.39	111.3		186.2	171.04	111.5
	176.2	44.62	111.3		186.5	177.85	111.5
	176.5	44.97	111.3		186.7	185.05	111.5
	176.7	45.07	111.3		187.0	192.28	111.5
	177.0	46.26	111.3		187.2	199.90	111.5
	177.2	49.34	111.3		187.5	207.53	111.5
	177.5	50.74	111.3		187.7	215.28	111.5
	177.7	52.34	111.3		188.0	223.23	111.5
	178.0	53.78	111.4		188.2	231.47	111.5
	178.2	55.22	111.4		188.5	239.24	111.6
	178.5	56.82	111.4		188.7	247.58	111.6
	178.7	58.41	111.4		189.0	255.73	111.6
	179.0	60.12	111.4		189.2	264.20	111.6
	179.2	61.95	111.4		189.5	272.69	111.6
	179.5	63.78	111.4		189.7	281.13	111.6
	179.7	65.58	111.4		190.0	290.11	111.6
	180.0	67.18	111.4		190.2	297.81	111.6
	180.2	68.99	111.4		190.5	303.88	111.6
	180.5	70.68	111.4		190.7	312.56	111.6
	180.7	73.08	111.4		191.0	320.26	111.6
	181.0	75.53	111.4		191.2	326.69	111.6
	181.2	78.16	111.4		191.5	334.59	111.6
	181.5	80.93	111.4		191.7	343.93	111.6
	181.7	83.90	111.4		192.0	352.71	111.6
	182.0	86.99	111.4		192.2	361.70	111.6

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	192.5	370.12	111.6		202.7	646.49	111.9
	192.7	378.43	111.7		203.0	651.34	111.9
	193.0	386.49	111.7		203.2	656.17	111.9
	193.2	394.74	111.7		203.5	660.76	111.9
	193.5	403.23	111.7		203.7	665.35	111.9
	193.7	411.44	111.7		204.0	669.86	111.9
	194.0	419.70	111.7		204.2	674.35	111.9
	194.2	427.75	111.7		204.5	678.75	111.9
	194.5	435.75	111.7		204.7	682.96	111.9
	194.7	443.44	111.7		205.0	687.32	111.9
	195.0	451.21	111.7		205.2	691.32	111.9
	195.2	458.94	111.7		205.5	695.37	111.9
	195.5	466.32	111.7		205.7	699.54	111.9
	195.7	473.61	111.7		206.0	703.59	111.9
	196.0	480.76	111.7		206.2	707.42	111.9
	196.2	488.07	111.7		206.5	711.28	111.9
	196.5	495.34	111.7		206.7	715.03	111.9
	196.7	502.81	111.7		207.0	718.73	111.9
	197.0	508.65	111.7		207.2	722.44	111.9
	197.2	515.87	111.7		207.5	726.12	111.9
	197.5	522.97	111.8		207.7	729.51	111.9
	197.7	529.89	111.8		208.0	733.08	111.9
	198.0	536.72	111.8		208.2	736.45	111.9
	198.2	543.47	111.8		208.5	739.80	112.0
	198.5	550.17	111.8		208.7	743.18	112.0
	198.7	556.53	111.8		209.0	746.37	112.0
	199.0	562.97	111.8		209.2	749.66	112.0
	199.2	569.30	111.8		209.5	752.77	112.0
	199.5	575.40	111.8		209.7	755.90	112.0
	199.7	581.46	111.8		210.0	759.04	112.0
	200.0	587.43	111.8		210.2	762.12	112.0
	200.2	593.09	111.8		210.5	764.98	112.0
	200.5	598.93	111.8		210.7	767.96	112.0
	200.7	604.51	111.8		211.0	770.86	112.0
	201.0	610.30	111.8		211.2	773.64	112.0
	201.2	615.81	111.8		211.5	776.44	112.0
	201.5	621.36	111.8		211.7	779.18	112.0
	201.7	626.32	111.8		212.0	781.88	112.0
	202.0	631.45	111.8		212.2	784.57	112.0
	202.2	636.74	111.8		212.5	787.20	112.0
	202.5	641.72	111.9		212.7	789.93	112.0

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	213.0	792.57	112.0		223.2	872.84	112.2
	213.2	795.21	112.0		223.5	874.17	112.2
	213.5	797.65	112.0		223.7	875.63	112.2
	213.7	800.12	112.0		224.0	877.09	112.2
	214.0	802.53	112.0		224.2	878.43	112.2
	214.2	804.92	112.0		224.5	879.96	112.2
	214.5	807.31	112.0		224.7	881.28	112.2
	214.7	809.66	112.0		225.0	882.59	112.2
	215.0	811.86	112.0		225.2	884.05	112.2
	215.2	814.13	112.1		225.5	885.62	112.2
	215.5	816.36	112.1		225.7	887.07	112.2
	215.7	818.60	112.1		226.0	888.26	112.2
	216.0	820.77	112.1		226.2	889.64	112.2
	216.2	822.94	112.1		226.5	890.91	112.2
	216.5	824.95	112.1		226.7	892.27	112.2
	216.7	827.11	112.1		227.0	893.49	112.2
	217.0	829.12	112.1		227.2	894.69	112.2
	217.2	831.16	112.1		227.5	895.89	112.2
	217.5	833.17	112.1		227.7	897.12	112.2
	217.7	835.19	112.1		228.0	898.32	112.2
	218.0	837.18	112.1		228.2	64.97	111.9
	218.2	839.10	112.1		228.5	28.61	112.0
	218.5	840.96	112.1		228.7	27.20	112.0
	218.7	842.85	112.1		229.0	29.53	112.0
	219.0	844.71	112.1		229.2	31.79	112.0
	219.2	846.56	112.1		229.5	28.96	112.0
	219.5	848.42	112.1		229.7	30.57	112.0
	219.7	850.22	112.1		230.0	32.39	112.0
	220.0	851.83	112.1		230.2	34.14	112.0
	220.2	853.60	112.1		230.5	35.84	112.0
	220.5	855.28	112.1		230.7	37.88	112.0
	220.7	856.92	112.1		231.0	39.80	112.0
	221.0	858.68	112.1		231.2	27.26	112.0
	221.2	860.27	112.1		231.5	28.78	112.0
	221.5	861.98	112.1		231.7	30.22	112.0
	221.7	863.60	112.1		232.0	31.33	112.0
	222.0	865.11	112.1		232.2	32.54	112.0
	222.2	866.66	112.1		232.5	33.89	112.0
	222.5	868.25	112.1		232.7	35.10	112.0
	222.7	869.80	112.2		233.0	36.44	112.0
	223.0	871.18	112.2		233.2	37.81	112.0

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	233.5	39.13	112.0		243.7	53.42	112.1
	233.7	40.43	112.0		244.0	51.26	112.1
	234.0	41.74	112.0		244.2	52.30	112.1
	234.2	43.04	112.0		244.5	53.53	112.1
	234.5	44.70	112.0		244.7	54.88	112.1
	234.7	46.24	112.0		245.0	56.62	112.2
	235.0	47.99	112.0		245.2	58.35	112.2
	235.2	49.88	112.0		245.5	60.41	112.2
	235.5	52.02	112.0		245.7	62.29	112.2
	235.7	54.03	112.0		246.0	64.40	112.2
	236.0	56.22	112.0		246.2	66.57	112.2
	236.2	58.51	112.0		246.5	68.75	112.2
	236.5	60.85	112.0		246.7	71.12	112.2
	236.7	63.42	112.0		247.0	73.63	112.2
	237.0	66.02	112.1		247.2	76.19	112.2
	237.2	68.73	112.1		247.5	78.76	112.2
	237.5	71.66	112.1		247.7	81.57	112.2
	237.7	74.71	112.1		248.0	84.43	112.2
	238.0	77.85	112.1		248.2	87.52	112.2
	238.2	81.16	112.1		248.5	90.60	112.2
	238.5	84.39	112.1		248.7	93.75	112.2
	238.7	87.26	112.1		249.0	96.93	112.2
	239.0	90.45	112.1		249.2	100.44	112.2
	239.2	93.67	112.1		249.5	103.03	112.2
	239.5	96.76	112.1		249.7	105.73	112.2
	239.7	99.79	112.1		250.0	108.46	112.2
	240.0	102.03	112.1		250.2	111.35	112.2
	240.2	104.49	112.1		250.5	114.34	112.2
	240.5	107.02	112.1		250.7	117.41	112.2
	240.7	109.67	112.1		251.0	120.70	112.2
	241.0	112.31	112.1		251.2	124.19	112.2
	241.2	115.53	112.1		251.5	127.80	112.2
	241.5	118.78	112.1		251.7	131.54	112.2
	241.7	122.13	112.1		252.0	135.41	112.2
	242.0	125.72	112.1		252.2	139.43	112.2
	242.2	129.52	112.1		252.5	143.60	112.2
	242.5	133.47	112.1		252.7	147.88	112.2
	242.7	137.43	112.1		253.0	152.31	112.2
	243.0	141.34	112.1		253.2	156.86	112.3
	243.2	145.63	112.1		253.5	161.58	112.3
	243.5	150.77	112.1		253.7	166.49	112.3

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	254.0	56.33	112.3		264.2	59.46	112.4
	254.2	57.91	112.3		264.5	60.77	112.4
	254.5	59.55	112.3		264.7	62.35	112.4
	254.7	61.34	112.3		265.0	63.86	112.4
	255.0	63.14	112.3		265.2	65.53	112.4
	255.2	65.01	112.3		265.5	67.20	112.4
	255.5	66.85	112.3		265.7	68.88	112.4
	255.7	68.87	112.3		266.0	70.85	112.4
	256.0	70.89	112.3		266.2	71.04	112.4
	256.2	73.05	112.3		266.5	72.43	112.4
	256.5	75.19	112.3		266.7	74.38	112.4
	256.7	77.49	112.3		267.0	76.39	112.4
	257.0	79.84	112.3		267.2	78.50	112.4
	257.2	82.24	112.3		267.5	80.55	112.4
	257.5	84.80	112.3		267.7	82.79	112.4
	257.7	87.26	112.3		268.0	84.85	112.4
	258.0	89.94	112.3		268.2	87.35	112.4
	258.2	92.77	112.3		268.5	89.59	112.4
	258.5	37.28	112.3		268.7	92.08	112.4
	258.7	38.58	112.3		269.0	94.62	112.5
	259.0	39.33	112.3		269.2	97.12	112.5
	259.2	40.16	112.3		269.5	98.48	112.5
	259.5	40.98	112.3		269.7	101.26	112.5
	259.7	41.91	112.3		270.0	104.09	112.5
	260.0	42.98	112.3		270.2	106.95	112.5
	260.2	43.93	112.3		270.5	109.94	112.5
	260.5	45.00	112.3		270.7	50.02	112.5
	260.7	46.05	112.3		271.0	51.49	112.5
	261.0	47.19	112.3		271.2	52.62	112.5
	261.2	48.40	112.3		271.5	53.87	112.5
	261.5	49.53	112.4		271.7	55.12	112.5
	261.7	50.80	112.4		272.0	56.39	112.5
	262.0	52.07	112.4		272.2	57.79	112.5
	262.2	53.34	112.4		272.5	59.19	112.5
	262.5	54.72	112.4		272.7	60.70	112.5
	262.7	56.04	112.4		273.0	62.16	112.5
	263.0	57.46	112.4		273.2	63.87	112.5
	263.2	58.90	112.4		273.5	65.52	112.5
	263.5	60.40	112.4		273.7	67.15	112.5
	263.7	57.51	112.4		274.0	68.76	112.5
	264.0	58.39	112.4		274.2	70.50	112.5

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	274.5	72.29	112.5		284.7	31.81	112.6
	274.7	74.21	112.5		285.0	31.84	112.6
	275.0	76.00	112.5		285.2	31.86	112.6
	275.2	78.04	112.5		285.5	31.87	112.6
	275.5	79.93	112.5		285.7	31.89	112.6
	275.7	82.01	112.5		286.0	31.90	112.6
	276.0	84.16	112.5		286.2	31.90	112.6
	276.2	82.46	112.5		286.5	31.89	112.6
	276.5	84.04	112.5		286.7	31.90	112.6
	276.7	85.91	112.5		287.0	31.92	112.6
	277.0	88.18	112.5		287.2	31.95	112.7
	277.2	90.51	112.5		287.5	31.98	112.7
	277.5	92.91	112.6		287.7	32.01	112.7
	277.7	95.35	112.6		288.0	32.05	112.7
	278.0	97.91	112.6		288.2	32.06	112.7
	278.2	100.45	112.6		288.5	32.01	112.7
	278.5	103.18	112.6		288.7	31.10	112.7
	278.7	105.93	112.6		289.0	31.40	112.7
	279.0	108.74	112.6		289.2	31.69	112.7
	279.2	111.57	112.6		289.5	31.54	112.7
	279.5	114.25	112.6		289.7	31.80	112.7
	279.7	117.30	112.6		290.0	32.01	112.7
	280.0	120.39	112.6		290.2	32.26	112.7
	280.2	123.44	112.6		290.5	32.58	112.7
	280.5	126.76	112.6		290.7	32.90	112.7
	280.7	130.22	112.6		291.0	33.31	112.7
	281.0	133.72	112.6		291.2	33.97	112.7
	281.2	38.20	112.5		291.5	34.13	112.7
	281.5	31.58	112.6		291.7	34.87	112.7
	281.7	31.47	112.6		292.0	35.07	112.7
	282.0	31.42	112.6		292.2	35.66	112.7
	282.2	31.44	112.6		292.5	36.21	112.7
	282.5	31.55	112.6		292.7	37.04	112.7
	282.7	31.63	112.6		293.0	37.28	112.7
	283.0	31.68	112.6		293.2	37.80	112.7
	283.2	31.71	112.6		293.5	38.37	112.7
	283.5	31.73	112.6		293.7	38.98	112.7
	283.7	31.78	112.6		294.0	39.55	112.7
	284.0	31.77	112.6		294.2	40.12	112.7
	284.2	31.77	112.6		294.5	40.74	112.7
	284.5	31.79	112.6		294.7	41.36	112.7

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	295.0	41.98	112.7		305.2	83.07	112.8
	295.2	42.59	112.7		305.5	84.61	112.8
	295.5	43.32	112.7		305.7	86.33	112.8
	295.7	43.95	112.7		306.0	87.99	112.8
	296.0	44.66	112.7		306.2	89.62	112.8
	296.2	45.35	112.7		306.5	91.33	112.8
	296.5	45.99	112.8		306.7	93.11	112.9
	296.7	46.82	112.8		307.0	94.89	112.9
	297.0	47.45	112.8		307.2	96.84	112.9
	297.2	48.23	112.8		307.5	98.68	112.9
	297.5	49.02	112.8		307.7	100.60	112.9
	297.7	49.72	112.8		308.0	102.60	112.9
	298.0	50.54	112.8		308.2	104.72	112.9
	298.2	51.32	112.8		308.5	106.82	112.9
	298.5	52.17	112.8		308.7	108.96	112.9
	298.7	52.98	112.8		309.0	111.19	112.9
	299.0	53.83	112.8		309.2	113.34	112.9
	299.2	54.81	112.8		309.5	115.80	112.9
	299.5	55.67	112.8		309.7	118.05	112.9
	299.7	56.53	112.8		310.0	120.47	112.9
	300.0	57.41	112.8		310.2	123.01	112.9
	300.2	58.39	112.8		310.5	125.55	112.9
	300.5	59.36	112.8		310.7	128.07	112.9
	300.7	60.40	112.8		311.0	130.67	112.9
	301.0	61.36	112.8		311.2	133.50	112.9
	301.2	62.45	112.8		311.5	136.27	112.9
	301.5	63.52	112.8		311.7	139.05	112.9
	301.7	64.64	112.8		312.0	141.94	112.9
	302.0	65.82	112.8		312.2	144.83	112.9
	302.2	66.96	112.8		312.5	147.75	112.9
	302.5	68.15	112.8		312.7	150.83	112.9
	302.7	69.32	112.8		313.0	153.96	112.9
	303.0	70.57	112.8		313.2	157.15	112.9
	303.2	71.86	112.8		313.5	160.34	112.9
	303.5	73.10	112.8		313.7	163.68	112.9
	303.7	74.38	112.8		314.0	166.96	112.9
	304.0	75.73	112.8		314.2	170.40	112.9
	304.2	77.10	112.8		314.5	173.79	112.9
	304.5	78.53	112.8		314.7	177.29	112.9
	304.7	80.01	112.8		315.0	180.88	112.9
	305.0	81.53	112.8		315.2	184.45	112.9

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	315.5	188.01	113.0		325.7	355.52	113.1
	315.7	191.76	113.0		326.0	359.64	113.1
	316.0	195.48	113.0		326.2	363.71	113.1
	316.2	199.26	113.0		326.5	367.72	113.1
	316.5	203.01	113.0		326.7	371.78	113.1
	316.7	206.84	113.0		327.0	375.81	113.1
	317.0	210.77	113.0		327.2	379.78	113.1
	317.2	214.57	113.0		327.5	383.79	113.1
	317.5	218.59	113.0		327.7	387.76	113.1
	317.7	222.53	113.0		328.0	391.55	113.1
	318.0	226.45	113.0		328.2	395.55	113.1
	318.2	230.46	113.0		328.5	399.38	113.1
	318.5	234.57	113.0		328.7	403.21	113.1
	318.7	238.60	113.0		329.0	407.14	113.1
	319.0	242.69	113.0		329.2	410.93	113.1
	319.2	246.76	113.0		329.5	414.67	113.1
	319.5	250.90	113.0		329.7	418.47	113.1
	319.7	255.03	113.0		330.0	422.08	113.1
	320.0	259.20	113.0		330.2	425.98	113.1
	320.2	263.47	113.0		330.5	429.53	113.1
	320.5	267.53	113.0		330.7	433.22	113.1
	320.7	271.68	113.0		331.0	436.83	113.1
	321.0	275.89	113.0		331.2	440.48	113.1
	321.2	280.07	113.0		331.5	444.05	113.2
	321.5	284.40	113.0		331.7	447.49	113.2
	321.7	288.52	113.0		332.0	448.15	113.2
	322.0	292.85	113.0		332.2	451.93	113.2
	322.2	297.06	113.0		332.5	455.39	113.2
	322.5	301.31	113.0		332.7	458.94	113.2
	322.7	305.51	113.0		333.0	462.46	113.2
	323.0	309.69	113.0		333.2	465.82	113.2
	323.2	313.93	113.0		333.5	469.24	113.2
	323.5	318.20	113.1		333.7	472.70	113.2
	323.7	322.38	113.1		334.0	475.97	113.2
	324.0	326.55	113.1		334.2	479.25	113.2
	324.2	330.60	113.1		334.5	482.56	113.2
	324.5	334.82	113.1		334.7	485.73	113.2
	324.7	338.96	113.1		335.0	488.98	113.2
	325.0	343.18	113.1		335.2	492.12	113.2
	325.2	347.31	113.1		335.5	495.22	113.2
	325.5	351.41	113.1		335.7	498.34	113.2

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	336.0	501.42	113.2		346.2	604.70	113.3
	336.2	504.46	113.2		346.5	606.72	113.3
	336.5	507.45	113.2		346.7	608.70	113.3
	336.7	510.49	113.2		347.0	610.80	113.3
	337.0	513.46	113.2		347.2	612.70	113.3
	337.2	516.32	113.2		347.5	614.73	113.3
	337.5	519.25	113.2		347.7	616.61	113.3
	337.7	522.10	113.2		348.0	618.52	113.3
	338.0	525.03	113.2		348.2	620.44	113.3
	338.2	527.80	113.2		348.5	622.28	113.3
	338.5	530.60	113.2		348.7	624.17	113.3
	338.7	533.40	113.2		349.0	625.99	113.3
	339.0	536.07	113.2		349.2	627.93	113.3
	339.2	538.80	113.2		349.5	629.66	113.3
	339.5	541.46	113.2		349.7	631.53	113.3
	339.7	544.17	113.2		350.0	633.24	113.3
	340.0	546.77	113.2		350.2	635.03	113.3
	340.2	549.39	113.2		350.5	636.89	113.3
	340.5	551.86	113.3		350.7	638.56	113.3
	340.7	554.50	113.3		351.0	640.19	113.4
	341.0	557.02	113.3		351.2	641.88	113.4
	341.2	559.53	113.3		351.5	643.65	113.4
	341.5	561.96	113.3		351.7	645.32	113.4
	341.7	564.48	113.3		352.0	646.99	113.4
	342.0	566.86	113.3		352.2	648.57	113.4
	342.2	569.30	113.3		352.5	650.27	113.4
	342.5	571.62	113.3		352.7	651.83	113.4
	342.7	574.05	113.3		353.0	653.45	113.4
	343.0	576.44	113.3		353.2	654.98	113.4
	343.2	578.74	113.3		353.5	656.56	113.4
	343.5	581.00	113.3		353.7	658.13	113.4
	343.7	583.27	113.3		354.0	659.71	113.4
	344.0	585.52	113.3		354.2	661.16	113.4
	344.2	587.76	113.3		354.5	662.70	113.4
	344.5	589.88	113.3		354.7	664.21	113.4
	344.7	592.02	113.3		355.0	665.65	113.4
	345.0	594.16	113.3		355.2	667.18	113.4
	345.2	596.37	113.3		355.5	668.61	113.4
	345.5	598.51	113.3		355.7	670.11	113.4
	345.7	600.59	113.3		356.0	671.51	113.4
	346.0	602.73	113.3		356.2	672.96	113.4

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	356.5	674.30	113.4		366.7	723.24	113.5
	356.7	675.85	113.4		367.0	724.21	113.5
	357.0	677.15	113.4		367.2	725.17	113.5
	357.2	678.45	113.4		367.5	726.29	113.5
	357.5	679.86	113.4		367.7	727.29	113.5
	357.7	681.22	113.4		368.0	728.16	113.5
	358.0	682.50	113.4		368.2	729.17	113.5
	358.2	683.88	113.4		368.5	730.10	113.5
	358.5	685.19	113.4		368.7	731.11	113.5
	358.7	686.49	113.4		369.0	732.14	113.5
	359.0	687.80	113.4		369.2	732.99	113.5
	359.2	689.06	113.4		369.5	733.90	113.5
	359.5	690.39	113.4		369.7	734.83	113.5
	359.7	691.61	113.4		370.0	735.79	113.5
	360.0	692.85	113.4		370.2	736.65	113.5
	360.2	694.06	113.4		370.5	737.62	113.5
	360.5	695.30	113.4		370.7	738.47	113.5
	360.7	696.54	113.4		371.0	739.44	113.5
	361.0	697.70	113.4		371.2	740.25	113.5
	361.2	699.02	113.4		371.5	741.19	113.5
	361.5	700.16	113.4		371.7	742.00	113.5
	361.7	701.38	113.4		372.0	742.99	113.5
	362.0	702.54	113.4		372.2	743.82	113.5
	362.2	703.68	113.4		372.5	744.63	113.5
	362.5	704.85	113.4		372.7	745.50	113.5
	362.7	706.01	113.4		373.0	746.32	113.5
	363.0	707.19	113.5		373.2	747.11	113.5
	363.2	708.20	113.5		373.5	748.03	113.5
	363.5	709.38	113.5		373.7	748.82	113.5
	363.7	710.55	113.5		374.0	749.73	113.5
	364.0	711.62	113.5		374.2	750.49	113.5
	364.2	712.68	113.5		374.5	751.26	113.5
	364.5	713.76	113.5		374.7	752.11	113.5
	364.7	714.92	113.5		375.0	753.01	113.5
	365.0	715.98	113.5		375.2	753.74	113.5
	365.2	717.02	113.5		375.5	754.48	113.5
	365.5	718.14	113.5		375.7	755.28	113.5
	365.7	719.05	113.5		376.0	756.13	113.5
	366.0	720.17	113.5		376.2	756.93	113.5
	366.2	721.18	113.5		376.5	757.62	113.5
	366.5	722.17	113.5		376.7	758.35	113.5

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	377.0	759.20	113.6		387.2	786.49	113.6
	377.2	759.96	113.6		387.5	787.04	113.6
	377.5	760.66	113.6		387.7	787.67	113.6
	377.7	761.39	113.6		388.0	788.52	113.6
	378.0	762.20	113.6		388.2	788.76	113.6
	378.2	762.89	113.6		388.5	789.37	113.6
	378.5	763.57	113.6		388.7	789.95	113.6
	378.7	764.28	113.6		389.0	790.50	113.6
	379.0	765.06	113.6		389.2	791.04	113.6
	379.2	765.78	113.6		389.5	791.62	113.6
	379.5	766.45	113.6		389.7	792.47	113.6
	379.7	767.15	113.6		390.0	792.72	113.6
	380.0	767.94	113.6		390.2	793.34	113.6
	380.2	768.62	113.6		390.5	793.87	113.6
	380.5	769.27	113.6		390.7	794.66	113.6
	380.7	770.00	113.6		391.0	794.90	113.6
	381.0	770.66	113.6		391.2	795.67	113.6
	381.2	771.28	113.6		391.5	795.90	113.6
	381.5	772.03	113.6		391.7	796.74	113.7
	381.7	772.70	113.6		392.0	796.98	113.7
	382.0	773.34	113.6		392.2	797.80	113.6
	382.2	774.04	113.6		392.5	798.03	113.7
	382.5	774.68	113.6		392.7	798.59	113.7
	382.7	775.35	113.6		393.0	799.37	113.7
	383.0	775.95	113.6		393.2	799.55	113.7
	383.2	776.65	113.6		393.5	800.38	113.7
	383.5	777.22	113.6		393.7	800.62	113.7
	383.7	777.85	113.6		394.0	801.41	113.7
	384.0	778.55	113.6		394.2	801.62	113.7
	384.2	779.27	113.6		394.5	802.17	113.7
	384.5	779.82	113.6		394.7	802.91	113.7
	384.7	780.45	113.6		395.0	803.14	113.7
	385.0	781.05	113.6		395.2	803.86	113.7
	385.2	781.61	113.6		395.5	804.05	113.7
	385.5	782.29	113.6		395.7	804.88	113.7
	385.7	782.89	113.6		396.0	805.11	113.7
	386.0	783.59	113.6		396.2	805.60	113.7
	386.2	784.47	113.6		396.5	806.05	113.7
	386.5	784.71	113.6		396.7	806.73	113.7
	386.7	785.61	113.6		397.0	806.94	113.7
	387.0	785.86	113.6		397.2	807.72	113.7

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	397.5	807.93	113.7		407.7	825.20	113.7
	397.7	808.70	113.7		408.0	825.60	113.7
	398.0	808.94	113.7		408.2	825.95	113.8
	398.2	809.58	113.7		408.5	826.53	113.8
	398.5	809.76	113.7		408.7	826.69	113.8
	398.7	810.55	113.7		409.0	824.01	113.8
	399.0	810.77	113.7		409.2	824.25	113.8
	399.2	811.22	113.7		409.5	824.63	113.8
	399.5	811.62	113.7		409.7	825.10	113.8
	399.7	812.07	113.7		410.0	825.60	113.8
	400.0	812.46	113.7		410.2	826.08	113.8
	400.2	812.92	113.7		410.5	826.65	113.8
	400.5	813.36	113.7		410.7	826.87	113.8
	400.7	813.82	113.7		411.0	755.57	113.7
	401.0	814.24	113.7		411.2	653.93	113.7
	401.2	814.67	113.7		411.5	603.19	113.7
	401.5	815.11	113.7		411.7	2032.86	114.6
	401.7	815.56	113.7		412.0	2130.95	114.1
	402.0	815.93	113.7		412.2	2113.13	114.1
	402.2	816.42	113.7		412.5	2106.54	114.1
	402.5	816.87	113.7		412.7	2109.67	114.1
	402.7	817.28	113.7		413.0	2110.38	114.1
	403.0	817.69	113.7		413.2	2113.23	114.1
	403.2	818.04	113.7		413.5	2110.94	114.1
	403.5	818.47	113.7		413.7	2110.40	114.1
	403.7	818.85	113.7		414.0	2130.74	114.2
	404.0	819.32	113.7		414.2	2049.49	114.2
	404.2	819.75	113.7		414.5	2192.10	114.2
	404.5	820.17	113.7		414.7	2168.99	114.2
	404.7	820.50	113.7		415.0	2153.84	114.3
	405.0	820.97	113.7		415.2	2135.04	114.3
	405.2	821.35	113.7		415.5	2122.19	114.3
	405.5	821.78	113.7		415.7	2111.89	114.3
	405.7	822.04	113.7		416.0	2105.39	114.3
	406.0	822.69	113.7		416.2	2109.94	114.3
	406.2	822.85	113.7		416.5	2115.09	114.3
	406.5	823.49	113.7		416.7	2113.84	114.3
	406.7	823.61	113.7		417.0	2113.69	114.3
	407.0	824.03	113.7		417.2	2113.53	114.3
	407.2	824.45	113.7		417.5	2113.63	114.2
	407.5	824.84	113.7		417.7	2113.46	114.3

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	418.0	2113.30	114.2		428.2	1937.37	112.0
	418.2	2113.14	114.2		428.5	2214.51	111.8
	418.5	2112.92	114.2		428.7	2080.31	111.5
	418.7	2112.72	114.2		429.0	2067.46	111.4
	419.0	2112.30	114.2		429.2	2051.30	111.4
	419.2	2112.26	114.2		429.5	1950.46	111.4
	419.5	2112.24	114.2		429.7	1898.83	111.3
	419.7	2112.43	114.2		430.0	1893.90	111.1
	420.0	2111.77	114.2		430.2	2017.79	110.7
	420.2	2129.90	114.2		430.5	2031.99	110.6
	420.5	2120.19	114.2		430.7	2014.37	110.6
	420.7	2113.42	114.2		431.0	1999.81	110.5
	421.0	2114.90	114.2		431.2	1995.92	110.5
	421.2	2337.00	114.2		431.5	1883.42	110.5
	421.5	2170.84	114.2		431.7	1864.40	110.4
	421.7	2151.80	114.2		432.0	1841.67	110.2
	422.0	2064.40	114.2		432.2	1984.16	109.9
	422.2	2043.97	114.2		432.5	1978.55	109.8
	422.5	2053.81	114.1		432.7	1962.05	109.7
	422.7	2087.78	114.0		433.0	1949.40	109.7
	423.0	2049.36	113.7		433.2	1949.32	109.7
	423.2	2172.90	113.5		433.5	1846.50	109.6
	423.5	2160.94	113.4		433.7	1822.29	109.5
	423.7	2143.35	113.3		434.0	1789.48	109.3
	424.0	2134.43	113.2		434.2	1925.93	109.1
	424.2	2131.72	113.2		434.5	1933.62	109.0
	424.5	2162.87	113.2		434.7	1916.39	109.0
	424.7	2143.68	113.2		435.0	1903.68	109.0
	425.0	2131.83	113.2		435.2	1817.22	108.9
	425.2	2127.55	113.2		435.5	1781.26	108.7
	425.5	2128.56	113.2		435.7	1758.36	108.5
	425.7	2027.67	113.1		436.0	1879.51	108.3
	426.0	1998.11	113.2		436.2	1887.91	108.2
	426.2	1980.96	113.1		436.5	1870.59	108.2
	426.5	2223.63	112.8		436.7	1858.04	108.1
	426.7	2124.45	112.5		437.0	1738.04	108.1
	427.0	2116.11	112.4		437.2	1751.77	107.9
	427.2	2098.49	112.4		437.5	1725.15	107.5
	427.5	2088.34	112.3		437.7	1838.02	107.1
	427.7	2024.69	112.3		438.0	1838.98	107.0
	428.0	1967.93	112.2		438.2	1821.70	106.9

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	438.5	1810.98	106.9		448.7	1540.51	101.1
	438.7	1809.70	106.9		449.0	1531.17	101.0
	439.0	1717.23	106.9		449.2	1459.17	101.0
	439.2	1702.74	106.7		449.5	1435.07	100.8
	439.5	1715.50	106.3		449.7	1429.88	100.6
	439.7	1782.08	106.1		450.0	1495.55	100.3
	440.0	1787.46	106.0		450.2	1504.24	100.3
	440.2	1771.58	106.0		450.5	1493.32	100.3
	440.5	1763.73	106.0		450.7	1483.77	100.3
	440.7	1687.77	105.9		451.0	1416.67	100.2
	441.0	1661.28	105.8		451.2	1393.10	100.0
	441.2	1657.75	105.5		451.5	1368.79	99.7
	441.5	1738.07	105.3		451.7	1450.58	99.5
	441.7	1735.73	105.2		452.0	1452.40	99.4
	442.0	1721.73	105.2		452.2	1441.91	99.4
	442.2	1716.28	105.1		452.5	1361.71	99.4
	442.5	1633.80	105.0		452.7	1360.18	99.3
	442.7	1618.52	104.7		453.0	1329.84	99.0
	443.0	1797.27	104.3		453.2	1408.64	98.7
	443.2	1685.94	103.9		453.5	1404.47	98.7
	443.5	1688.74	103.9		453.7	1395.46	98.7
	443.7	1675.39	103.8		454.0	1327.37	98.6
	444.0	1669.75	103.8		454.2	1310.83	98.5
	444.2	1578.77	103.8		454.5	1317.49	98.3
	444.5	1585.64	103.6		454.7	1366.02	98.0
	444.7	1559.40	103.5		455.0	1358.63	98.0
	445.0	1644.78	103.3		455.2	1350.62	98.0
	445.2	1648.33	103.3		455.5	1282.49	97.9
	445.5	1634.98	103.3		455.7	1276.49	97.8
	445.7	1624.95	103.2		456.0	1254.35	97.6
	446.0	1554.90	103.2		456.2	1319.06	97.3
	446.2	1532.54	102.9		456.5	1315.26	97.2
	446.5	1499.54	102.5		456.7	1307.08	97.2
	446.7	1595.25	102.2		457.0	1303.59	97.2
	447.0	1594.42	102.1		457.2	1303.84	97.2
	447.2	1581.82	102.1		457.5	1303.36	97.1
	447.5	1516.06	102.0		457.7	1302.95	97.1
	447.7	1501.26	101.9		458.0	1302.70	97.1
	448.0	1476.38	101.7		458.2	1302.54	97.1
	448.2	1523.90	101.4		458.5	1302.27	97.1
	448.5	1552.58	101.1		458.7	1302.05	97.1

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	459.0	1301.96	97.1		469.2	1109.81	95.4
	459.2	1301.74	97.0		469.5	1091.05	95.2
	459.5	1301.64	97.0		469.7	1126.85	95.0
	459.7	1301.44	97.0		470.0	1128.75	94.8
	460.0	1301.34	97.0		470.2	1122.46	94.8
	460.2	1301.18	97.0		470.5	1074.82	94.8
	460.5	1301.04	97.0		470.7	1065.38	94.7
	460.7	1300.89	97.0		471.0	1045.44	94.5
	461.0	1300.85	97.0		471.2	1082.21	94.3
	461.2	1300.43	97.0		471.5	1080.15	94.2
	461.5	1300.38	97.0		471.7	1076.27	94.2
	461.7	1300.34	97.0		472.0	1043.29	94.1
	462.0	1300.29	97.0		472.2	1020.31	94.1
	462.2	1300.25	97.0		472.5	1003.77	93.9
	462.5	1300.21	97.0		472.7	1033.04	93.6
	462.7	1300.19	97.0		473.0	1034.07	93.5
	463.0	1244.84	96.9		473.2	1030.56	93.5
	463.2	1248.34	97.0		473.5	1027.94	93.4
	463.5	1217.13	97.1		473.7	987.71	93.4
	463.7	1310.12	97.0		474.0	970.18	93.3
	464.0	1271.11	96.8		474.2	1009.73	93.1
	464.2	1262.43	96.8		474.5	987.72	93.0
	464.5	1256.84	96.7		474.7	984.57	93.0
	464.7	1256.53	96.7		475.0	957.87	93.0
	465.0	1256.60	96.7		475.2	938.75	92.9
	465.2	1256.09	96.7		475.5	913.53	92.9
	465.5	1255.99	96.7		475.7	957.79	92.8
	465.7	1199.58	96.6		476.0	940.46	92.6
	466.0	1180.42	96.5		476.2	936.62	92.5
	466.2	1196.02	96.3		476.5	894.60	92.4
	466.5	1223.90	96.1		476.7	889.73	92.3
	466.7	1223.90	96.1		477.0	863.69	92.2
	467.0	1216.74	96.0		477.2	893.41	92.2
	467.2	1210.81	96.0		477.5	892.21	92.1
	467.5	1182.53	96.0		477.7	889.16	92.0
	467.7	1153.85	96.0		478.0	848.48	91.9
	468.0	1130.50	95.9		478.2	840.73	91.9
	468.2	1204.40	95.7		478.5	814.54	91.8
	468.5	1176.11	95.6		478.7	867.85	91.5
	468.7	1168.97	95.5		479.0	847.97	91.1
	469.0	1131.21	95.5		479.2	846.09	91.0

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	479.5	843.52	91.0		489.7	518.49	86.4
	479.7	843.36	90.9		490.0	514.07	86.3
	480.0	800.34	90.9		490.2	521.77	86.3
	480.2	789.60	90.7		490.5	521.56	86.3
	480.5	770.17	90.5		490.7	520.47	86.3
	480.7	800.88	90.3		491.0	496.19	86.3
	481.0	799.93	90.1		491.2	474.33	86.2
	481.2	797.49	90.1		491.5	456.58	86.2
	481.5	765.87	90.0		491.7	475.30	86.2
	481.7	748.93	90.0		492.0	475.12	86.1
	482.0	721.23	89.7		492.2	473.71	86.1
	482.2	755.41	89.4		492.5	443.43	86.1
	482.5	755.53	89.2		492.7	430.44	86.1
	482.7	754.13	89.2		493.0	408.52	86.2
	483.0	731.94	89.1		493.2	429.69	86.2
	483.2	709.97	89.0		493.5	429.73	86.2
	483.5	699.51	88.8		493.7	428.08	86.2
	483.7	722.18	88.6		494.0	403.79	86.2
	484.0	709.51	88.4		494.2	392.26	86.2
	484.2	707.85	88.3		494.5	370.45	86.3
	484.5	706.07	88.3		494.7	384.00	86.4
	484.7	670.44	88.3		495.0	383.96	86.4
	485.0	662.57	88.2		495.2	382.45	86.4
	485.2	638.39	88.1		495.5	357.67	86.4
	485.5	662.50	87.8		495.7	342.21	86.4
	485.7	661.66	87.8		496.0	320.17	86.6
	486.0	659.93	87.7		496.2	338.13	86.7
	486.2	659.01	87.7		496.5	338.10	86.8
	486.5	626.79	87.7		496.7	336.62	86.8
	486.7	606.35	87.5		497.0	313.95	86.8
	487.0	599.17	87.3		497.2	301.01	86.8
	487.2	615.35	87.1		497.5	277.57	87.0
	487.5	613.96	87.1		497.7	291.63	87.2
	487.7	613.13	87.0		498.0	291.68	87.2
	488.0	581.42	87.0		498.2	290.29	87.3
	488.2	562.17	86.9		498.5	289.73	87.3
	488.5	551.81	86.8		498.7	261.68	87.3
	488.7	568.99	86.6		499.0	246.19	87.4
	489.0	568.49	86.5		499.2	235.48	87.6
	489.2	566.56	86.5		499.5	251.40	87.8
	489.5	534.05	86.5		499.7	244.52	87.8

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	500.0	244.75	87.9		510.2	150.63	89.3
	500.2	243.92	87.9		510.5	150.69	89.3
	500.5	243.22	87.9		510.7	150.65	89.3
	500.7	216.75	87.9		511.0	133.13	89.3
	501.0	203.59	88.0		511.2	111.56	89.3
	501.2	189.85	88.3		511.5	84.19	89.4
	501.5	197.80	88.5		511.7	101.24	89.6
	501.7	197.09	88.6		512.0	105.16	89.7
	502.0	196.86	88.7		512.2	105.37	89.8
	502.2	196.68	88.7		512.5	105.46	89.8
	502.5	196.56	88.7		512.7	105.74	89.8
	502.7	196.51	88.7		513.0	105.41	89.8
	503.0	196.47	88.7		513.2	105.81	89.8
	503.2	196.45	88.7		513.5	105.76	89.8
	503.5	196.45	88.7		513.7	106.22	89.9
	503.7	197.90	88.7		514.0	106.09	89.9
	504.0	197.28	88.7		514.2	105.56	89.9
	504.2	196.60	88.7		514.5	105.53	89.9
	504.5	196.42	88.7		514.7	105.53	89.9
	504.7	196.34	88.7		515.0	105.53	89.9
	505.0	196.29	88.7		515.2	105.54	89.9
	505.2	196.27	88.7		515.5	105.59	89.9
	505.5	196.22	88.7		515.7	105.71	89.9
	505.7	196.22	88.7		516.0	92.35	89.9
	506.0	196.75	88.7		516.2	73.90	89.9
	506.2	196.22	88.7		516.5	46.34	90.1
	506.5	174.16	88.7		516.7	57.70	90.6
	506.7	150.03	88.7		517.0	60.93	90.9
	507.0	120.28	88.9		517.2	61.19	91.0
	507.2	147.73	89.1		517.5	61.22	91.1
	507.5	150.12	89.2		517.7	61.17	91.2
	507.7	142.02	89.2		518.0	61.14	91.2
	508.0	150.69	89.3		518.2	61.13	91.2
	508.2	150.75	89.3		518.5	61.14	91.2
	508.5	150.17	89.3		518.7	61.16	91.2
	508.7	150.77	89.3		519.0	61.16	91.2
	509.0	151.99	89.3		519.2	61.20	91.2
	509.2	150.61	89.3		519.5	49.46	91.3
	509.5	150.53	89.3		519.7	32.06	91.4
	509.7	150.57	89.3		520.0	17.88	91.8
	510.0	150.61	89.3		520.2	21.18	92.4

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	520.5	21.21	92.7		530.7	16.35	93.3
	520.7	21.22	92.8		531.0	16.29	93.3
	521.0	17.91	92.9		531.2	16.39	93.3
	521.2	17.84	93.0		531.5	16.44	93.3
	521.5	17.83	93.1		531.7	16.49	93.3
	521.7	18.46	93.1		532.0	16.56	93.3
	522.0	15.98	93.2		532.2	16.59	93.4
	522.2	17.30	93.2		532.5	16.61	93.4
	522.5	15.42	93.2		532.7	16.63	93.4
	522.7	16.30	93.3		533.0	16.65	93.4
	523.0	16.27	93.3		533.2	16.64	93.4
	523.2	16.25	93.3		533.5	16.62	93.4
	523.5	16.23	93.3		533.7	16.62	93.4
	523.7	15.09	93.3		534.0	16.61	93.4
	524.0	13.90	93.3		534.2	16.61	93.4
	524.2	13.91	93.3		534.5	16.61	93.4
	524.5	13.85	93.3		534.7	16.60	93.4
	524.7	13.80	93.3		535.0	16.59	93.4
	525.0	13.79	93.3		535.2	16.59	93.4
	525.2	13.77	93.3		535.5	16.59	93.4
	525.5	13.79	93.3		535.7	16.58	93.4
	525.7	13.78	93.3		536.0	16.58	93.4
	526.0	13.79	93.3		536.2	16.57	93.4
	526.2	13.80	93.3		536.5	16.59	93.4
	526.5	13.82	93.3		536.7	16.61	93.4
	526.7	13.85	93.3		537.0	15.51	93.4
	527.0	13.87	93.3		537.2	14.74	93.4
	527.2	13.88	93.3		537.5	14.72	93.3
	527.5	13.88	93.3		537.7	13.15	93.3
	527.7	13.89	93.3		538.0	13.50	93.3
	528.0	13.90	93.3		538.2	13.56	93.3
	528.2	13.91	93.3		538.5	13.58	93.3
	528.5	13.92	93.3		538.7	13.59	93.3
	528.7	13.94	93.3		539.0	13.56	93.3
	529.0	13.96	93.3		539.2	13.53	93.3
	529.2	13.95	93.3		539.5	13.53	93.3
	529.5	13.95	93.3		539.7	13.51	93.3
	529.7	13.95	93.3		540.0	13.50	93.3
	530.0	13.95	93.3		540.2	13.49	93.3
	530.2	13.93	93.3		540.5	13.49	93.3
	530.5	13.93	93.3		540.7	13.49	93.3

Printing every 1 samples


Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	541.0	13.50	93.3		551.2	0.35	100.9
	541.2	13.52	93.3		551.5	0.37	101.6
	541.5	13.52	93.3		551.7	0.39	102.1
	541.7	13.49	93.3		552.0	0.40	102.6
	542.0	11.70	93.3		552.2	0.42	103.0
	542.2	10.34	93.3		552.5	0.45	103.5
	542.5	10.30	93.4		552.7	0.46	103.9
	542.7	10.31	93.4		553.0	0.48	104.4
	543.0	10.30	93.4		553.2	0.50	104.9
	543.2	10.37	93.4		553.5	0.52	105.2
	543.5	7.18	93.5		553.7	0.53	105.6
	543.7	7.20	93.6		554.0	0.55	105.9
	544.0	7.27	93.6		554.2	0.57	106.3
	544.2	5.71	93.6		554.5	0.59	106.6
	544.5	5.62	93.8		554.7	0.61	106.9
	544.7	5.58	93.9		555.0	0.62	107.2
	545.0	5.62	94.0		555.2	0.64	107.6
	545.2	3.58	94.0		555.5	0.65	107.9
	545.5	2.66	94.3		555.7	0.66	108.2
	545.7	2.69	94.7		556.0	0.67	108.3
	546.0	2.68	95.1		556.2	0.72	108.5
	546.2	1.28	95.4		556.5	0.75	108.9
	546.5	1.25	95.9		556.7	0.79	109.2
	546.7	1.23	95.9		557.0	0.83	109.4
	547.0	1.26	95.8		557.2	0.86	109.7
	547.2	1.23	95.6		557.5	0.89	109.8
	547.5	1.07	95.2		557.7	0.91	109.9
	547.7	1.32	94.7		558.0	0.92	110.0
	548.0	1.30	94.0		558.2	0.94	110.1
	548.2	1.26	93.5		558.5	0.97	110.1
	548.5	0.81	92.9		558.7	1.00	110.3
	548.7	0.74	95.7		559.0	0.66	110.5
	549.0	0.73	97.5		559.2	0.74	110.6
	549.2	0.85	96.4		559.5	1.13	110.6
	549.5	0.88	96.6		559.7	1.13	110.7
	549.7	0.31	96.9		560.0	1.12	110.8
	550.0	0.33	97.6		560.2	1.10	111.0
	550.2	0.32	98.3		560.5	1.06	111.1
	550.5	0.31	99.0		560.7	1.08	111.3
	550.7	0.31	99.7		561.0	1.58	111.5
	551.0	0.33	100.3		561.2	0.50	110.9

Printing every 1 samples

Serial # 8017		Inside	
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	561.5	0.48	110.9
	561.7	0.51	110.6
	562.0	0.51	110.5
	562.2	0.59	110.4
	562.5	0.55	110.2
	562.7	0.52	109.9
	563.0	0.58	109.6
	563.2	0.54	109.4
	563.5	0.51	109.5

Printing every 1 samples

# Horner Plot

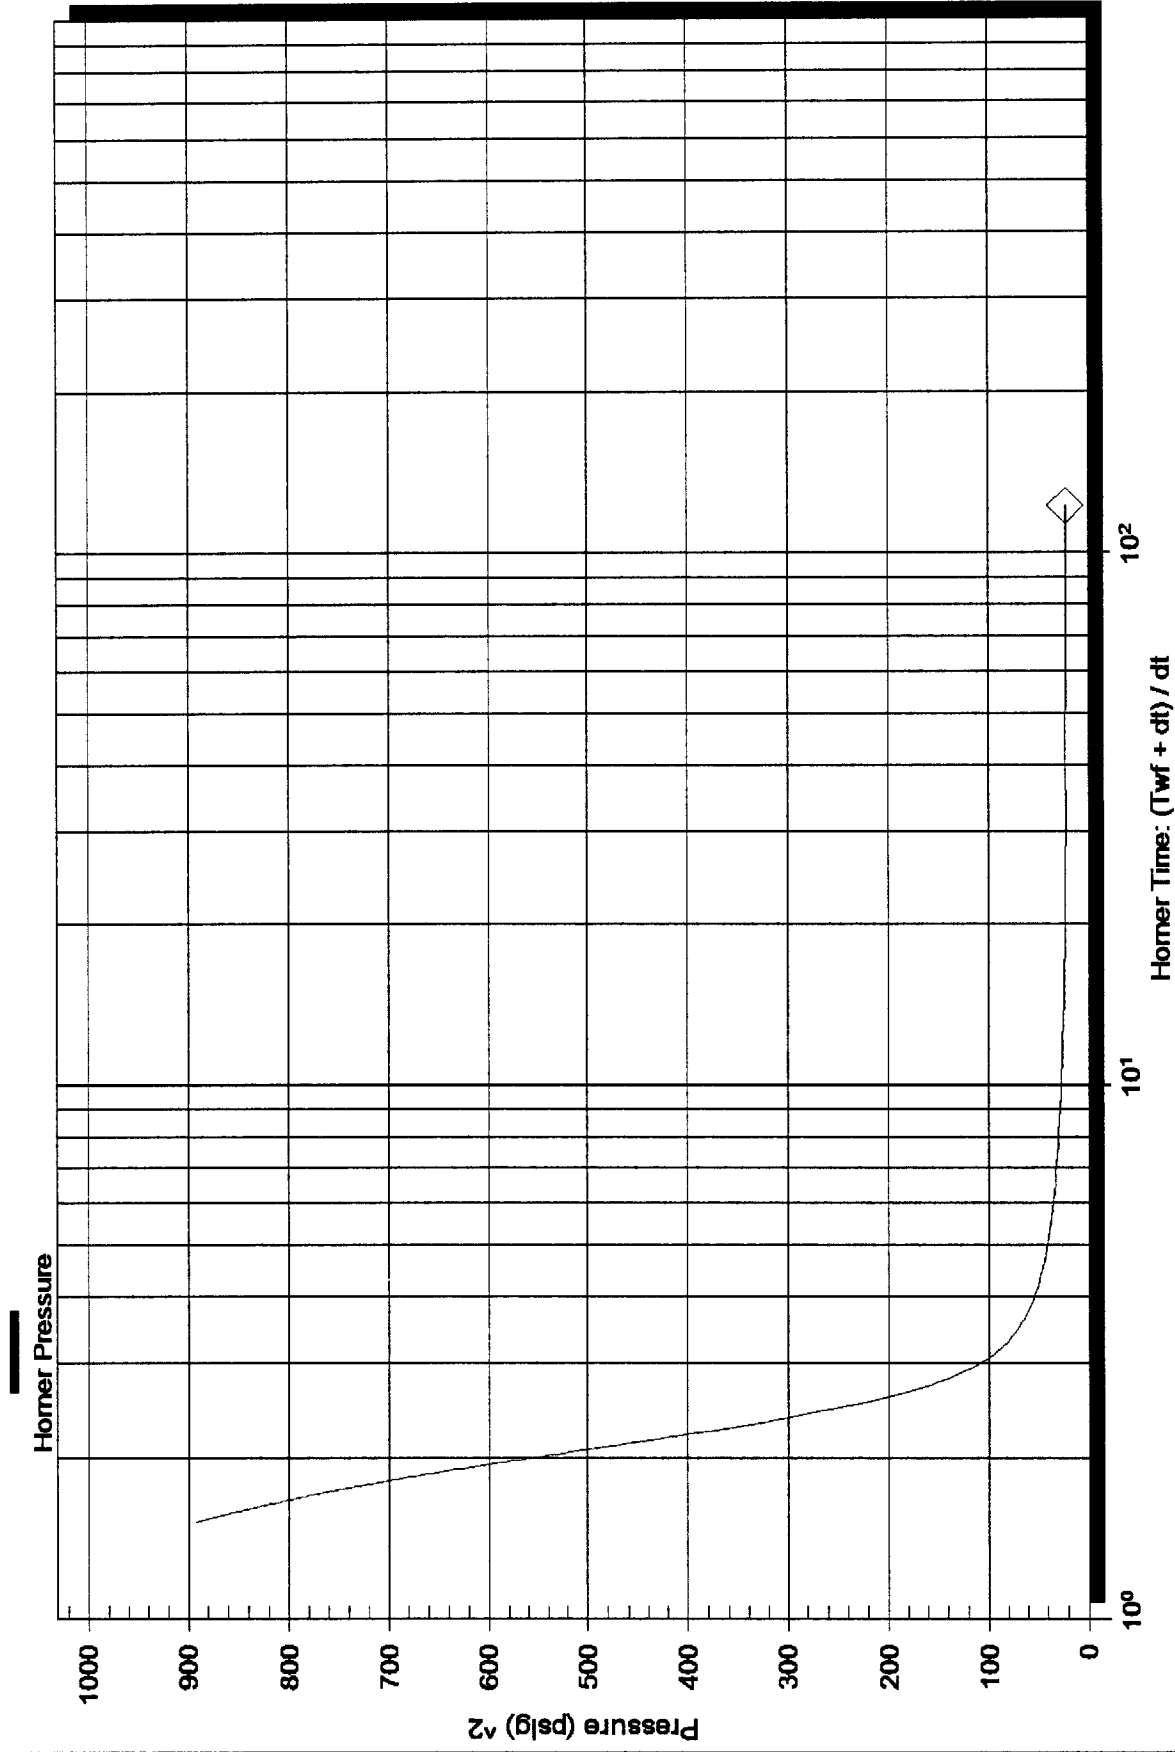


Serial Number: 8351 (Inside)

P\* : Slope (m) : kpa/log cycle

Flow Cycle: 1

198884

### Horner Plot

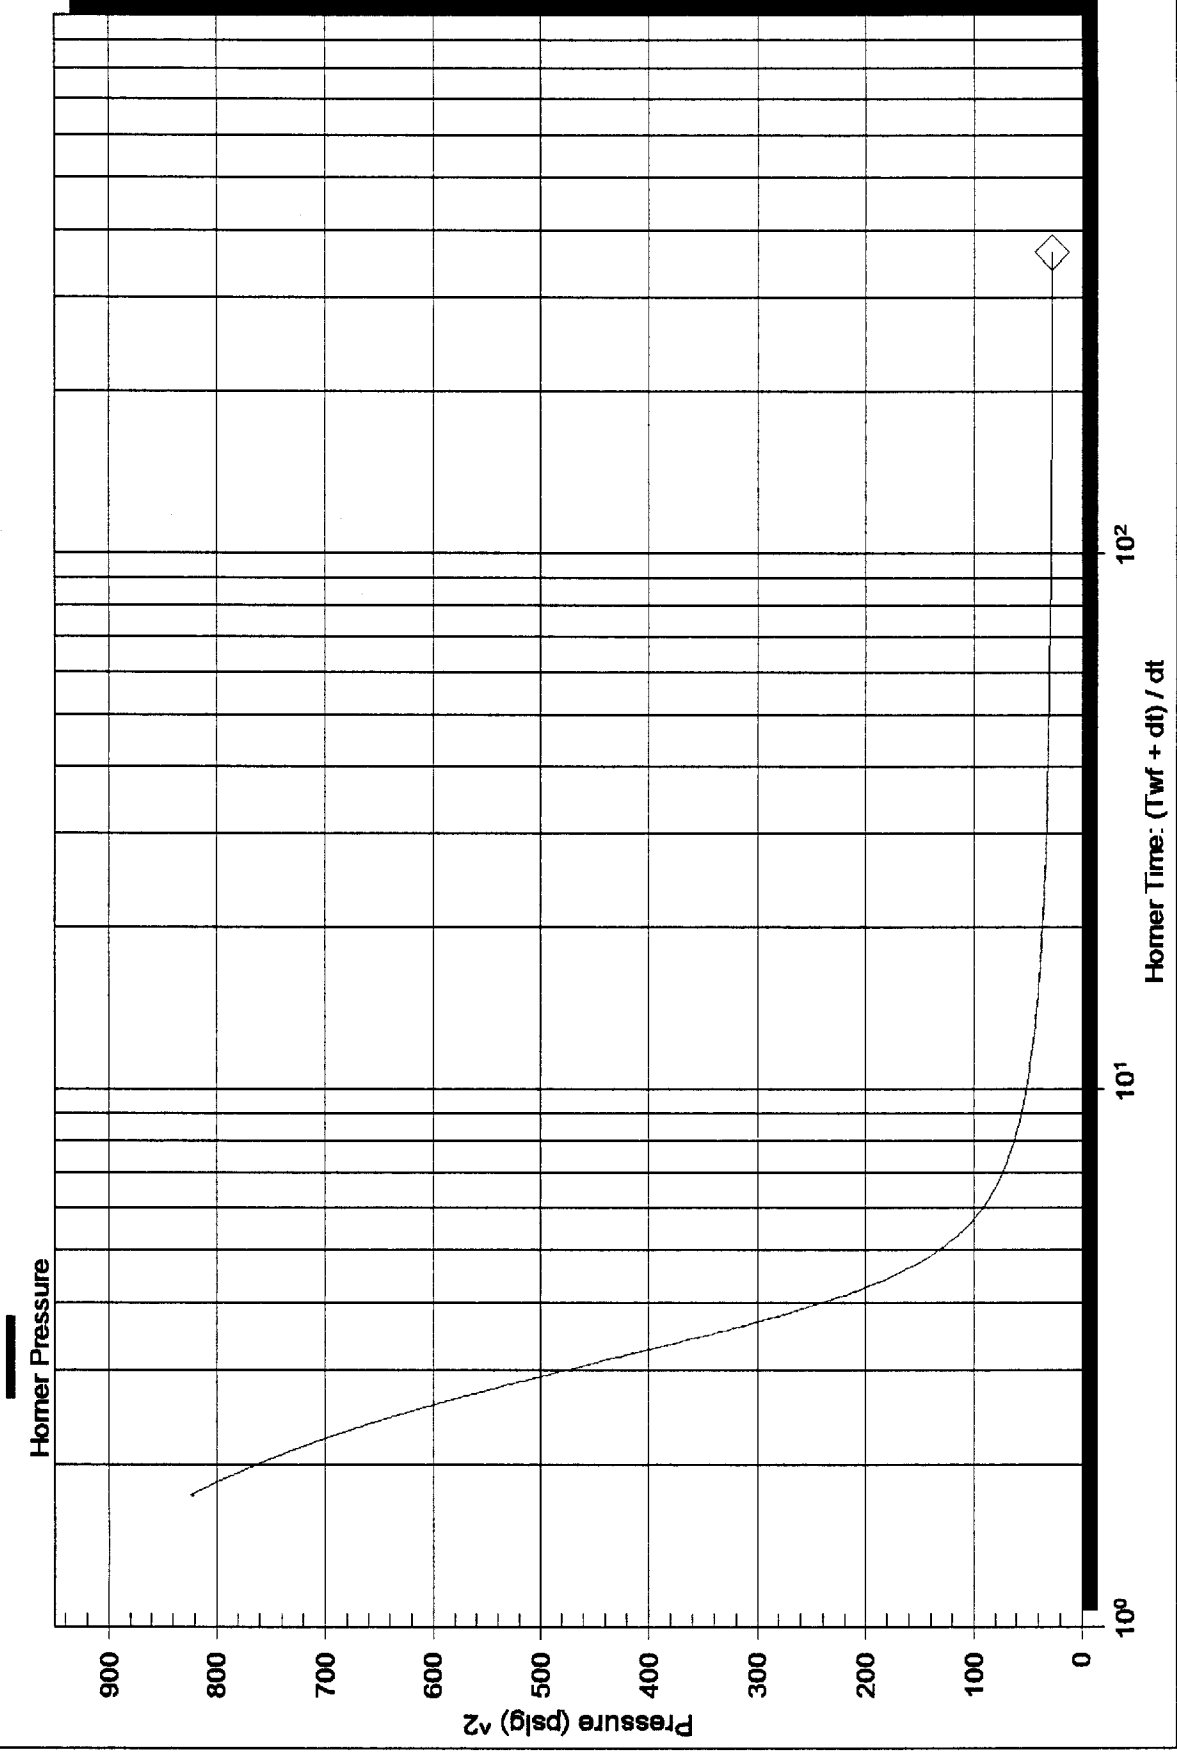

Serial Number: 8351 (Inside)

P\* : Slope (m) : kpa/log cycle

Flow Cycle: 2



# **Weatherford®**

## **Completion Systems**

### **DRILL STEM TEST REPORT**

Prepared For: **EOG Resources**  
Oklahoma City, OK

ATTN: Gary Brock

**S.11-22s-34wFinney**

**LaRue 11-#1**

Start Date: 2008.08.03 @ 05:15:10

End Date: 2008.08.03 @ 14:51:25

Job Ticket #: 31373                      DST #: 2

**RECEIVED**  
**KANSAS CORPORATION COMMISSION**

**SEP 29 2008**

**CONSERVATION DIVISION**  
**WICHITA, KS**

**ALPINE OIL SERVICES CORPORATION**  
2460, 240 - 4 Avenue S.W. Calgary, AB. T2P 4H4  
ph: 263-7800 fax: 264-7260



# Weatherford® Completion Systems

## DRILL STEM TEST REPORT

EOG Resources  
Oklahoma City, OK  
ATTN: Gary Brock

LaRue 11-#1  
S.11-22s-34wFinney  
Job Ticket: 31373      DST#: 2  
Test Start: 2008.08.03 @ 05:15:10

### GENERAL INFORMATION:


Formation: **Morrow Sand**  
Deviated: No Whipstock:                      ft (KB)  
Time Tool Opened: 07:50:25  
Time Test Ended: 14:51:25  
Interval: **4674.00 ft (KB) To 4720.00 ft (KB) (TVD)**  
Total Depth: 4720.00 ft (KB) (TVD)  
Hole Diameter: 7.88 inches Hole Condition: Good  
Test Type: Conventional Bottom Hole  
Tester: Chuck Smith  
Unit No: 37  
Reference Elevations: 2950.00 ft (KB)  
2928.00 ft (CF)  
KB to GR/CF: 22.00 ft

### Serial #: 8017

Inside

Press@RunDepth: 28.96 psig @ 4677.00 ft (KB)      Capacity: 7000.00 psig  
Start Date: 2008.08.03      End Date: 2008.08.03      Last Calib.: 2008.08.03  
Start Time: 05:15:11      End Time: 14:51:25      Time On Btm: 2008.08.03 @ 07:49:40  
Time Off Btm: 2008.08.03 @ 12:24:25

TEST COMMENT: IF: Weak blow died @ 15 min.  
IS: No return.  
FF: No blow.  
FS: No return.

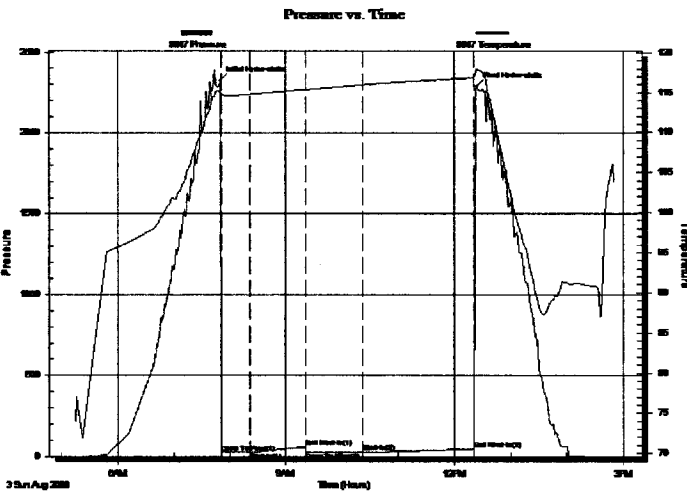

### PRESSURE SUMMARY

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	2325.91	115.34	Initial Hydro-static
1	25.35	114.49	Open To Flow (1)
31	28.63	114.77	Shut-in(1)
92	60.65	115.37	End Shut-in(1)
92	29.34	115.36	Open To Flow (2)
152	28.96	115.94	Shut-in(2)
272	49.08	116.85	End Shut-in(2)
275	2288.27	117.97	Final Hydro-static

### Recovery

Length (ft)	Description	Volume (bbl)
10.00	SOCM 1%O 99%M	0.05

### Gas Rates

Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)



**Weatherford®**  
**Completion Systems**

# DRILL STEM TEST REPORT

EOG Resources  
 Oklahoma City, OK  
 ATTN: Gary Brock


**LaRue 11-#1**  
**S.11-22s-34w Finney**  
 Job Ticket: 31373      **DST#: 2**  
 Test Start: 2008.08.03 @ 05:15:10

**GENERAL INFORMATION:**

Formation: **Morrow Sand**  
 Deviated: No Whipstock:                      ft (KB)  
 Time Tool Opened: 07:50:25  
 Time Test Ended: 14:51:25  
 Interval: **4674.00 ft (KB) To 4720.00 ft (KB) (TVD)**  
 Total Depth: **4720.00 ft (KB) (TVD)**  
 Hole Diameter: **7.88 inches** Hole Condition: Good  
 Test Type: **Conventional Bottom Hole**  
 Tester: **Chuck Smith**  
 Unit No: **37**  
 Reference Elevations: **2950.00 ft (KB)**  
    **2928.00 ft (CF)**  
 KB to GR/CF: **22.00 ft**

**Serial #: 8351      Inside**  
 Press@RunDepth:                      psig @ **4677.00 ft (KB)**  
 Start Date: **2008.08.03**      End Date: **2008.08.03**  
 Start Time: **05:15:06**      End Time: **14:50:50**  
 Capacity: **7000.00 psig**  
 Last Calib.: **2008.08.03**  
 Time On Btm:  
 Time Off Btm:

TEST COMMENT: IF: Weak blow died @ 15 min.  
 IS: No return.  
 FF: No blow .  
 FS: No return.

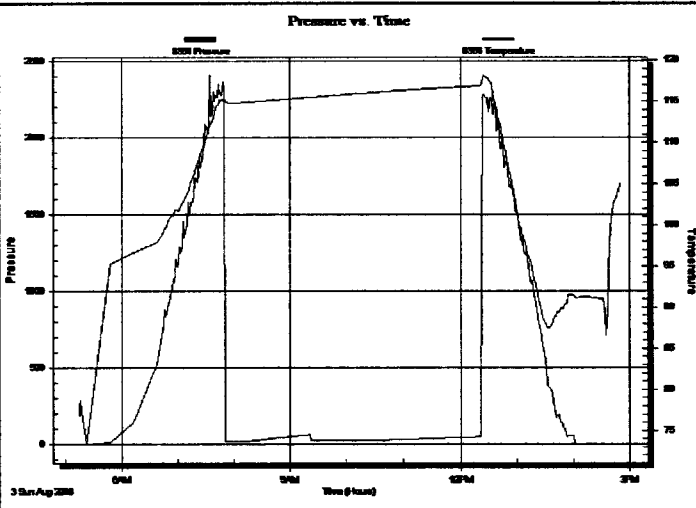

PRESSURE SUMMARY			
Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation

Recovery		
Length (ft)	Description	Volume (bbl)
10.00	SOCM 1%O 99%M	0.05

Gas Rates			
	Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)



**Weatherford®**  
**Completion Systems**

**DRILL STEM TEST REPORT**

**TOOL DIAGRAM**

EOG Resources

LaRue 11-#1

Oklahoma City, OK

S.11-22s-34wFinney

Job Ticket: 31373

DST#: 2

ATTN: Gary Brock

Test Start: 2008.08.03 @ 05:15:10

**Tool Information**

Drill Pipe:	Length: 4299.00 ft	Diameter: 3.80 inches	Volume: 60.30 bbl	Tool Weight: 2700.00 lb
Heavy Wt. Pipe:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight set on Packer: 30000.00 lb
Drill Collar:	Length: 368.00 ft	Diameter: 2.25 inches	Volume: 1.81 bbl	Weight to Pull Loose: 90000.00 lb
			<u>Total Volume: 62.11 bbl</u>	Tool Chased 0.00 ft
Drill Pipe Above KB:	23.00 ft			String Weight: Initial 70000.00 lb
Depth to Top Packer:	4674.00 ft			Final 70000.00 lb
Depth to Bottom Packer:	ft			
Interval between Packers:	46.00 ft			
Tool Length:	76.00 ft			
Number of Packers:	2	Diameter: 6.75 inches		

**Tool Comments:**

Tool slid 5 feet.

Tool Description	Length (ft)	Serial No.	Position	Depth (ft)	Accum. Lengths
Change Over Sub	1.00			4645.00	
Shut In Tool	5.00			4650.00	
Sampler	2.00			4652.00	
Hydraulic tool	5.00			4657.00	
Jars	5.00			4662.00	
Safety Joint	3.00			4665.00	
Packer	5.00			4670.00	30.00 Bottom Of Top Packer
Packer	4.00			4674.00	
Stubb	1.00			4675.00	
Perforations	2.00			4677.00	
Recorder	0.00	8017	Inside	4677.00	
Recorder	0.00	8351	Inside	4677.00	
Perforations	5.00			4682.00	
Change Over Sub	1.00			4683.00	
Drill Pipe	31.00			4714.00	
Change Over Sub	1.00			4715.00	
Bullnose	5.00			4720.00	46.00 Bottom Packers & Anchor
<b>Total Tool Length:</b>	<b>76.00</b>				



**Weatherford®**  
**Completion Systems**

**DRILL STEM TEST REPORT**

**FLUID SUMMARY**

EOG Resources **LaRue 11-#1**  
 Oklahoma City, OK **S.11-22s-34wFinney**  
 Job Ticket: 31373 **DST#: 2**  
 ATTN: Gary Brock Test Start: 2008.08.03 @ 05:15:10

**Mud and Cushion Information**

Mud Type: Gel Chem	Cushion Type:	Oil API:	0 deg API
Mud Weight: 9.00 lb/gal	Cushion Length: ft	Water Salinity:	0 ppm
Viscosity: 51.00 sec/qt	Cushion Volume: bbl		
Water Loss: 9.38 cm <sup>3</sup>	Gas Cushion Type:		
Resistivity: 0.00 ohm.m	Gas Cushion Pressure: psig		
Salinity: 2100.00 ppm			
Filter Cake: 1.00 inches			

**Recovery Information**

Recovery Table

Length ft	Description	Volume bbl
10.00	SOCM 1%O 99%M	0.049

Total Length: 10.00 ft Total Volume: 0.049 bbl  
 Num Fluid Samples: 0 Num Gas Bombs: 0 Serial #:  
 Laboratory Name: Laboratory Location:  
 Recovery Comments:



# DRILL STEM TEST REPORT

GAS RATES

**Weatherford<sup>®</sup>**  
**Completion Systems**

EOG Resources

LaRue 11-#1

Oklahoma City, OK

S.11-22s-34wFinney

Job Ticket: 31373

DST#: 2

ATTN: Gary Brock

Test Start: 2008.08.03 @ 05:15:10

## Gas Rates Information

Temperature: 59 deg C  
Relative Density: 0.65  
Z Factor: 0.8

Gas Rates Table

Flow Period	Elapsed Time	Choke (mm)	Pressure (kPaa)	Gas Rate (m <sup>3</sup> /d)
		0.00	0.00	0.00


Serial #: 8017

Inside

EOG Resources

S.11-22s-34w Finney

DST Test Number: 2

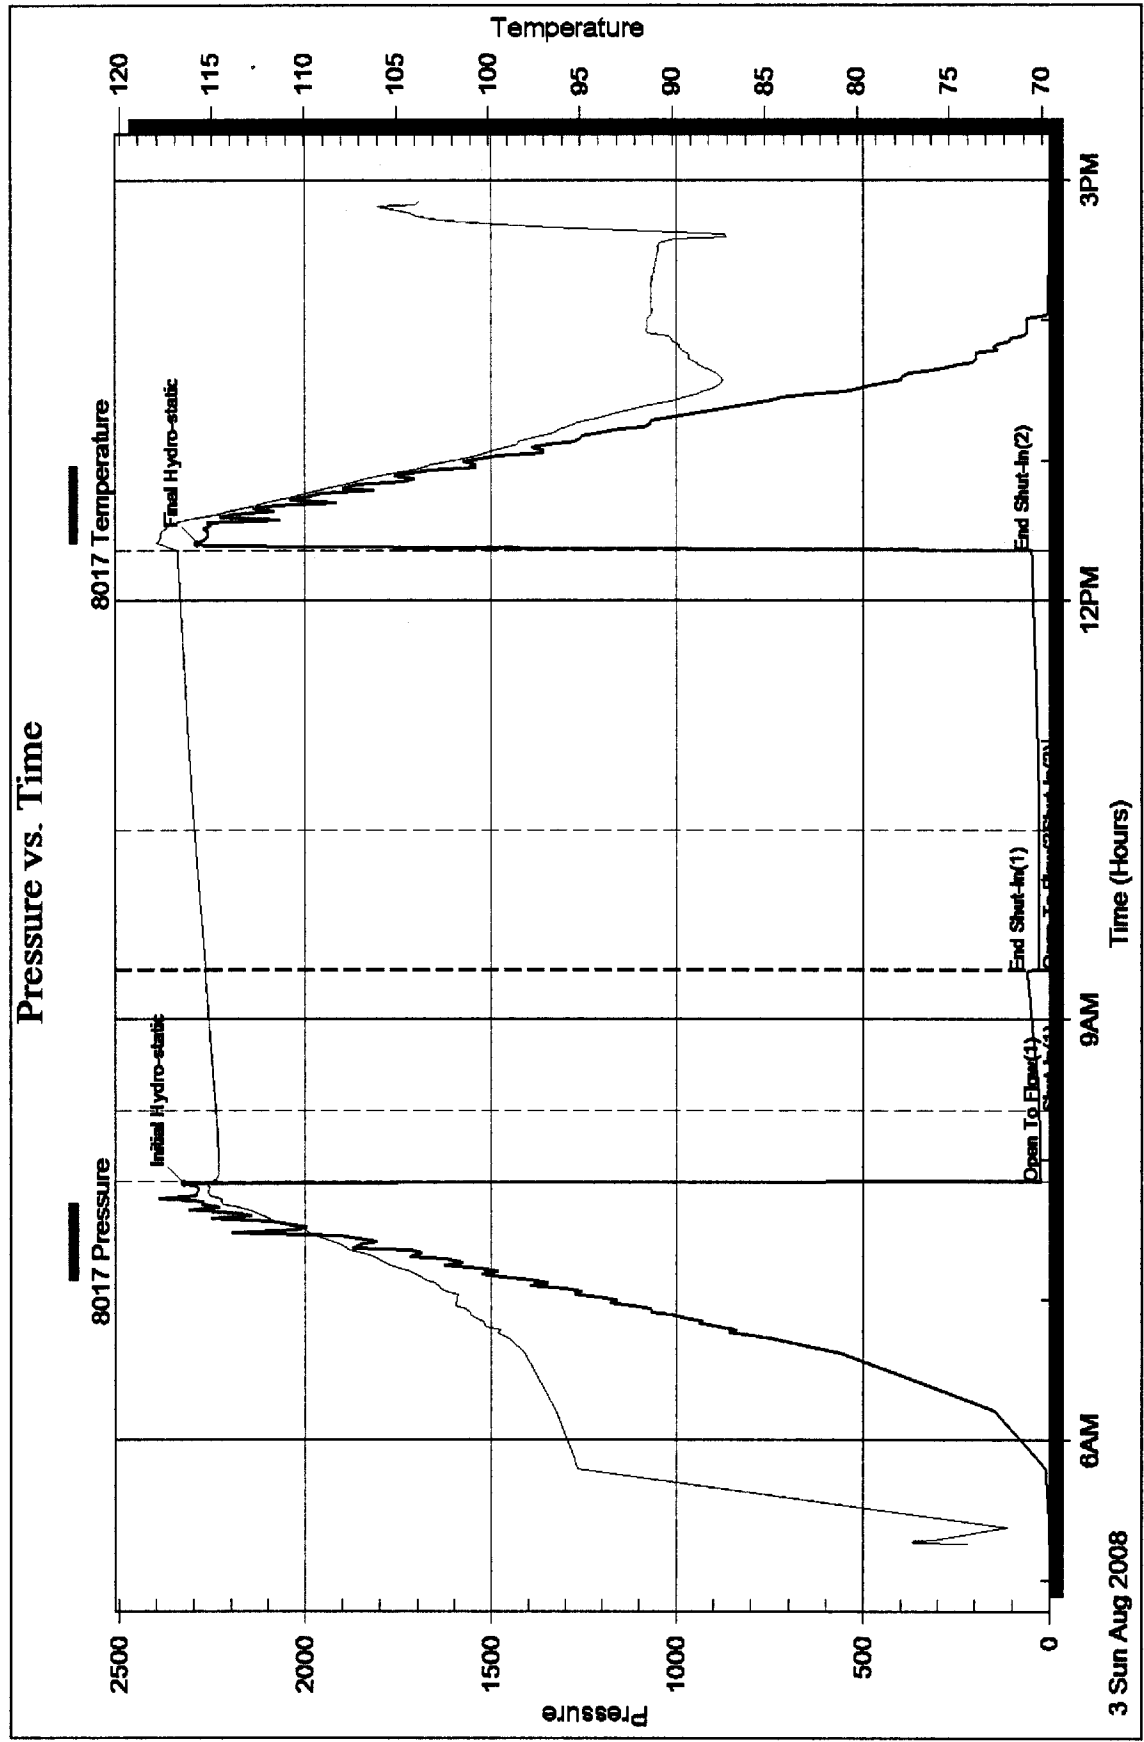

Serial #: 8351


Inside

EOG Resources

S.11-22s-34w Finney

DST Test Number: 2

### Pressure vs. Time

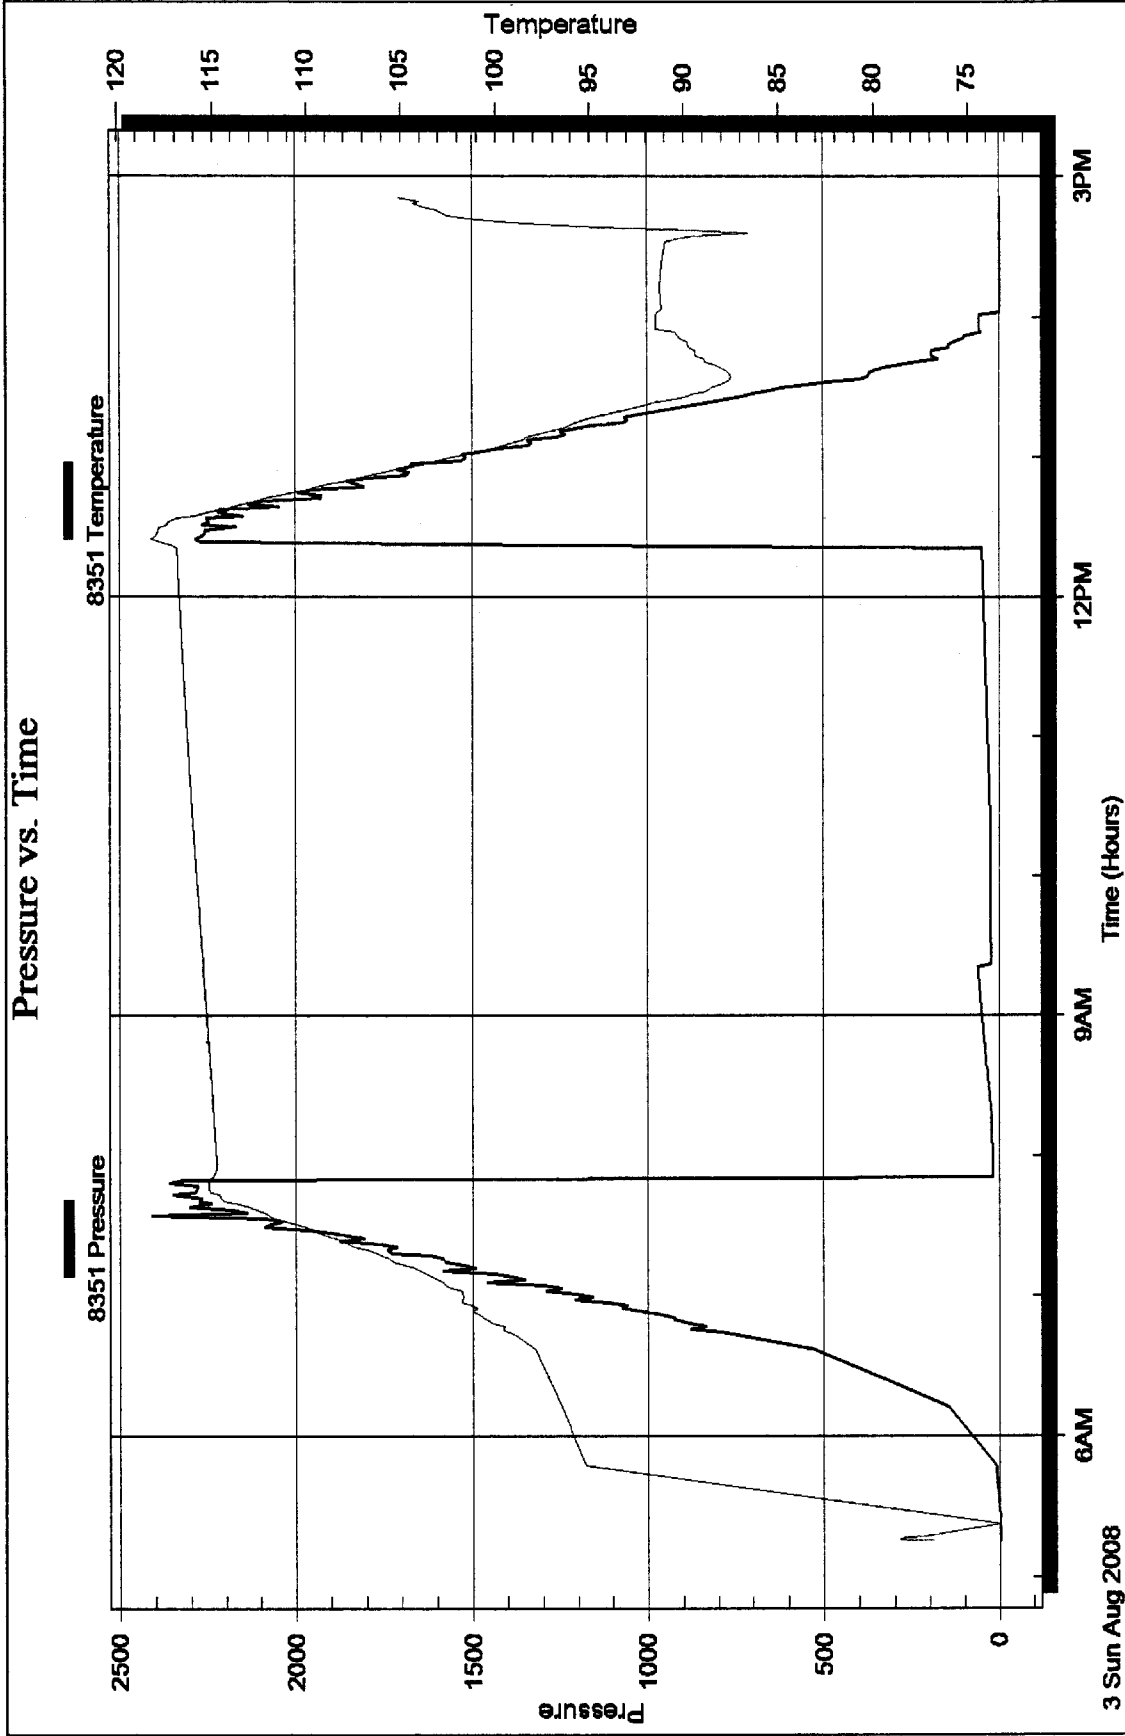



**Weatherford®**  
**Completion Systems**

**DRILL STEM TESTING - DATA LISTING**

EOG Resources

LaRue 11-#1

Oklahoma City, OK

S.11-22s-34wFinney

Job Ticket: 31373

DST#: 2

ATTN: Gary Brock

Test Start: 2008.08.03 @ 05:15:10

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	0.0	0.97	74.0		0.6	0.66	76.7
	0.0	0.98	74.1		0.6	0.67	76.7
	0.0	1.01	74.1		0.6	0.67	76.8
	0.1	1.00	74.2		0.6	0.67	76.8
	0.1	0.98	74.3		0.6	0.67	76.8
	0.1	0.96	74.4		0.6	0.68	76.8
	0.1	0.93	74.4		0.6	0.67	76.8
	0.1	0.90	74.5		0.7	0.67	76.8
	0.1	0.86	74.6		0.7	0.67	76.9
	0.2	0.81	74.6		0.7	0.67	76.9
	0.2	0.77	74.7		0.7	0.68	76.9
	0.2	0.73	74.8		0.7	0.68	76.9
	0.2	0.70	74.9		0.8	0.68	77.0
	0.2	0.67	75.0		0.8	0.70	77.0
	0.2	0.65	75.1		0.8	0.70	77.0
	0.3	0.63	75.2		0.8	0.71	77.0
	0.3	0.62	75.3		0.8	0.71	77.0
	0.3	0.61	75.4		0.8	0.72	77.0
	0.3	0.61	75.5		0.9	0.72	77.0
	0.3	0.61	75.7		0.9	0.72	77.1
	0.3	0.61	75.8		0.9	0.72	77.1
	0.3	0.62	75.9		0.9	0.73	77.0
	0.4	0.62	76.0		0.9	0.73	77.1
	0.4	0.62	76.1		0.9	0.73	77.0
	0.4	0.63	76.2		0.9	0.73	77.0
	0.4	0.64	76.3		1.0	0.74	77.0
	0.4	0.65	76.4		1.0	0.74	77.0
	0.4	0.66	76.4		1.0	0.75	77.0
	0.5	0.66	76.5		1.0	0.75	77.0
	0.5	0.67	76.5		1.0	0.75	77.0
	0.5	0.67	76.6		1.0	0.76	76.9
	0.5	0.67	76.6		1.1	0.77	76.9
	0.5	0.67	76.7		1.1	0.77	76.9

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	1.1	0.78	76.9		1.8	0.82	75.9
	1.1	0.79	76.9		1.8	0.83	75.9
	1.1	0.79	76.8		1.8	0.85	75.9
	1.1	0.80	76.8		1.8	0.85	75.9
	1.2	0.81	76.8		1.9	0.85	75.9
	1.2	0.81	76.8		1.9	0.85	75.8
	1.2	0.81	76.8		1.9	0.85	75.8
	1.2	0.82	76.7		1.9	0.85	75.8
	1.2	0.81	76.7		1.9	0.86	75.8
	1.3	0.81	76.7		1.9	0.86	75.8
	1.3	0.81	76.7		2.0	0.88	75.8
	1.3	0.81	76.6		2.0	0.89	75.7
	1.3	0.80	76.6		2.0	0.90	75.7
	1.3	0.80	76.6		7.0	0.93	71.9
	1.3	0.80	76.6		12.0	0.93	70.5
	1.4	0.79	76.5		17.0	0.92	69.8
	1.4	0.80	76.5		22.0	0.82	73.3
	1.4	0.80	76.5		27.0	10.89	96.5
	1.4	0.80	76.5		32.0	10.67	95.1
	1.4	0.80	76.4		37.0	9.61	93.7
	1.4	0.80	76.4		42.0	58.04	96.5
	1.5	0.80	76.4		47.0	104.92	96.8
	1.5	0.80	76.3		52.0	99.74	97.0
	1.5	0.80	76.3		57.0	147.76	96.4
	1.5	0.81	76.3		62.0	193.54	96.5
	1.5	0.80	76.3		67.0	334.94	96.4
	1.5	0.80	76.3		72.0	424.36	96.9
	1.5	0.80	76.2		77.0	424.16	97.0
	1.6	0.80	76.2		82.0	563.70	98.0
	1.6	0.80	76.2		87.0	729.55	98.9
	1.6	0.79	76.2		87.2	772.30	99.1
	1.6	0.80	76.2		87.5	792.76	99.3
	1.6	0.81	76.1		87.7	748.07	98.9
	1.6	0.81	76.1		88.0	747.30	98.9
	1.7	0.81	76.1		88.2	746.73	98.8
	1.7	0.80	76.1		88.5	753.30	98.8
	1.7	0.81	76.0		88.7	798.49	98.9
	1.7	0.80	76.0		89.0	863.03	98.9
	1.7	0.81	76.0		89.2	792.96	99.3
	1.8	0.81	76.0		89.5	792.23	99.3
	1.8	0.81	76.0		89.7	791.47	99.3

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	90.0	791.28	99.3		100.2	1068.29	101.3
	90.2	836.50	99.4		100.5	1068.06	101.3
	90.5	857.84	99.5		100.7	1074.72	101.3
	90.7	888.54	99.6		101.0	1112.11	101.4
	91.0	838.90	99.5		101.2	1142.40	101.5
	91.2	838.01	99.4		101.5	1109.36	101.6
	91.5	837.41	99.4		101.7	1116.02	101.8
	91.7	836.66	99.4		102.0	1114.94	101.8
	92.0	836.45	99.3		102.2	1114.69	101.8
	92.2	879.50	99.4		102.5	1118.17	101.8
	92.5	926.85	99.7		102.7	1154.79	101.8
	92.7	876.29	100.0		103.0	1178.13	101.8
	93.0	883.28	100.1		103.2	1237.59	101.7
	93.2	882.52	100.2		103.5	1162.49	101.6
	93.5	882.35	100.2		103.7	1161.58	101.6
	93.7	910.52	100.3		104.0	1160.94	101.7
	94.0	953.06	100.3		104.2	1160.24	101.7
	94.2	938.91	100.3		104.5	1160.06	101.7
	94.5	930.19	100.2		104.7	1178.61	101.7
	94.7	929.14	100.1		105.0	1223.56	101.8
	95.0	929.05	100.2		105.2	1271.30	101.9
	95.2	928.60	100.2		105.5	1209.66	101.7
	95.5	928.49	100.3		105.7	1207.98	101.6
	95.7	905.12	100.3		106.0	1207.32	101.6
	96.0	976.03	100.4		106.2	1206.74	101.6
	96.2	1019.04	100.3		106.5	1235.50	101.7
	96.5	977.42	100.5		106.7	1274.75	101.7
	96.7	976.18	100.7		107.0	1332.85	101.7
	97.0	975.40	100.8		107.2	1256.72	102.1
	97.2	975.24	100.9		107.5	1254.93	102.2
	97.5	998.65	101.0		107.7	1254.21	102.3
	97.7	1047.69	101.0		108.0	1253.65	102.3
	98.0	1015.15	101.0		108.2	1265.38	102.3
	98.2	1022.81	101.1		108.5	1317.55	102.3
	98.5	1022.15	101.1		108.7	1361.85	102.4
	98.7	1021.55	101.0		109.0	1291.12	102.6
	99.0	1031.23	101.0		109.2	1302.28	102.6
	99.2	1065.28	101.0		109.5	1301.52	102.6
	99.5	1097.04	100.9		109.7	1300.73	102.6
	99.7	1067.90	101.1		110.0	1300.53	102.6
	100.0	1069.04	101.2		110.2	1349.89	102.6

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	110.5	1395.64	102.7		120.7	1655.37	105.7
	110.7	1369.95	102.7		121.0	1663.47	105.7
	111.0	1348.58	102.8		121.2	1669.38	105.7
	111.2	1347.61	102.8		121.5	1642.22	105.8
	111.5	1346.86	102.9		121.7	1624.74	105.9
	111.7	1346.34	102.9		122.0	1623.90	105.9
	112.0	1409.16	103.0		122.2	1623.26	106.0
	112.2	1446.29	103.0		122.5	1655.58	106.0
	112.5	1389.89	103.0		122.7	1709.26	106.1
	112.7	1393.77	103.3		123.0	1718.75	106.2
	113.0	1393.00	103.4		123.2	1687.27	106.3
	113.2	1392.35	103.5		123.5	1671.36	106.6
	113.5	1391.84	103.5		123.7	1671.11	106.7
	113.7	1427.40	103.5		124.0	1670.52	106.8
	114.0	1492.20	103.6		124.2	1687.99	106.8
	114.2	1471.87	103.6		124.5	1758.53	106.9
	114.5	1438.66	103.7		124.7	1798.63	107.1
	114.7	1437.88	103.8		125.0	1726.51	107.4
	115.0	1437.25	103.8		125.2	1717.55	107.5
	115.2	1450.08	103.9		125.5	1716.66	107.5
	115.5	1525.79	103.9		125.7	1715.94	107.5
	115.7	1662.09	104.1		126.0	1726.45	107.5
	116.0	1485.25	104.2		126.2	1800.83	107.6
	116.2	1484.72	104.3		126.5	1825.54	107.5
	116.5	1484.21	104.3		126.7	1873.88	107.7
	116.7	1483.70	104.3		127.0	1765.22	107.8
	117.0	1562.37	104.3		127.2	1763.74	107.9
	117.2	1594.42	104.4		127.5	1762.89	107.9
	117.5	1546.63	104.6		127.7	1775.20	108.0
	117.7	1532.22	104.8		128.0	1853.94	108.0
	118.0	1531.53	104.8		128.2	1921.46	108.1
	118.2	1530.94	104.9		128.5	1814.76	108.3
	118.5	1602.25	104.9		128.7	1810.96	108.4
	118.7	1611.97	105.0		129.0	1809.93	108.4
	119.0	1620.69	105.2		129.2	1809.03	108.5
	119.2	1625.82	105.3		129.5	1912.29	108.5
	119.5	1579.03	105.5		129.7	1931.27	108.5
	119.7	1578.90	105.6		130.0	1987.76	108.7
	120.0	1578.34	105.6		130.2	1859.53	108.9
	120.2	1577.78	105.6		130.5	1858.37	108.9
	120.5	1577.26	105.6		130.7	1857.40	109.0

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	131.0	1869.53	109.0		141.2	2282.81	112.4
	131.2	1964.52	109.0		141.5	2187.87	112.5
	131.5	2143.00	109.3		141.7	2188.03	112.6
	131.7	1905.86	109.4		142.0	2186.50	112.6
	132.0	1904.57	109.5		142.2	2184.97	112.7
	132.2	1903.38	109.5		142.5	2217.06	112.7
	132.5	1815.47	109.5		142.7	2311.98	112.8
	132.7	2008.05	109.6		143.0	2314.62	112.9
	133.0	2196.83	109.7		143.2	2317.90	113.1
	133.2	1956.37	109.8		143.5	2234.19	113.3
	133.5	1951.83	109.9		143.7	2233.00	113.5
	133.7	1950.63	109.9		144.0	2231.58	113.5
	134.0	1949.69	109.9		144.2	2230.08	113.5
	134.2	2025.60	109.9		144.5	2367.77	113.6
	134.5	2189.93	110.1		144.7	2352.35	113.7
	134.7	2003.24	110.1		145.0	2354.40	114.0
	135.0	1999.96	110.3		145.2	2355.33	114.2
	135.2	1998.62	110.4		145.5	2279.09	114.3
	135.5	1997.49	110.4		145.7	2278.85	114.4
	135.7	2111.09	110.5		146.0	2277.73	114.5
	136.0	2272.03	110.7		146.2	2276.34	114.5
	136.2	2049.15	110.9		146.5	2275.09	114.5
	136.5	2046.80	111.1		146.7	2273.91	114.5
	136.7	2045.55	111.1		147.0	2272.86	114.5
	137.0	2044.51	111.1		147.2	2271.94	114.5
	137.2	2171.84	111.2		147.5	2271.09	114.5
	137.5	2317.08	111.5		147.7	2270.33	114.5
	137.7	2093.07	111.6		148.0	2392.55	114.5
	138.0	2094.27	111.7		148.2	2293.41	114.7
	138.2	2092.53	111.7		148.5	2297.30	115.0
	138.5	2091.08	111.7		148.7	2297.21	115.0
	138.7	2012.93	111.7		149.0	2295.34	115.1
	139.0	2231.32	111.8		149.2	2294.27	115.1
	139.2	2253.26	111.9		149.5	2293.98	115.1
	139.5	2167.02	111.9		149.7	2293.90	115.1
	139.7	2141.28	112.1		150.0	2291.89	115.1
	140.0	2139.79	112.2		150.2	2291.17	115.1
	140.2	2138.04	112.2		150.5	2289.92	115.2
	140.5	2145.80	112.2		150.7	2288.42	115.2
	140.7	2144.51	112.2		151.0	2287.21	115.2
	141.0	2260.38	112.3		151.2	2286.09	115.2

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	151.5	2285.18	115.1		161.7	26.80	114.6
	151.7	2284.93	115.1		162.0	26.78	114.6
	152.0	2284.86	115.1		162.2	26.77	114.6
	152.2	2283.97	115.1		162.5	26.76	114.6
	152.5	2283.90	115.1		162.7	26.74	114.6
	152.7	2282.08	115.1		163.0	26.73	114.6
	153.0	2292.87	115.1		163.2	26.71	114.6
	153.2	2328.71	115.0		163.5	26.68	114.6
	153.5	2319.07	115.2		163.7	26.96	114.6
	153.7	2315.20	115.2		164.0	26.64	114.6
	154.0	2320.72	115.3		164.2	26.63	114.6
	154.2	2318.21	115.3		164.5	26.62	114.6
Initial Hydro-static	154.5	2325.91	115.3		164.7	26.99	114.6
	154.7	2464.36	115.4		165.0	26.59	114.6
	155.0	2305.12	115.4		165.2	26.61	114.6
Open To Flow (1)	155.2	25.35	114.5		165.5	26.64	114.6
	155.5	25.67	114.9		165.7	26.66	114.6
	155.7	25.57	114.8		166.0	26.69	114.6
	156.0	26.10	114.8		166.2	26.73	114.6
	156.2	26.21	114.7		166.5	26.75	114.6
	156.5	26.24	114.7		166.7	26.78	114.6
	156.7	26.27	114.7		167.0	26.81	114.6
	157.0	26.28	114.7		167.2	26.83	114.6
	157.2	26.32	114.7		167.5	26.86	114.6
	157.5	26.33	114.6		167.7	26.88	114.6
	157.7	26.34	114.6		168.0	26.91	114.6
	158.0	26.38	114.6		168.2	26.94	114.6
	158.2	26.40	114.6		168.5	26.96	114.6
	158.5	26.42	114.6		168.7	26.98	114.6
	158.7	26.45	114.6		169.0	27.00	114.6
	159.0	26.48	114.6		169.2	27.04	114.6
	159.2	26.49	114.6		169.5	27.07	114.6
	159.5	26.52	114.6		169.7	27.09	114.6
	159.7	26.55	114.6		170.0	27.12	114.6
	160.0	26.60	114.6		170.2	27.14	114.6
	160.2	26.64	114.6		170.5	27.17	114.6
	160.5	26.68	114.6		170.7	27.19	114.6
	160.7	26.71	114.6		171.0	27.22	114.6
	161.0	26.73	114.6		171.2	27.24	114.6
	161.2	26.76	114.6		171.5	27.26	114.6
	161.5	26.79	114.6		171.7	27.29	114.6

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	172.0	27.32	114.6		182.2	27.76	114.7
	172.2	27.34	114.6		182.5	28.12	114.7
	172.5	27.36	114.6		182.7	27.86	114.7
	172.7	27.37	114.6		183.0	28.20	114.7
	173.0	27.39	114.6		183.2	28.24	114.7
	173.2	27.40	114.7		183.5	28.28	114.7
	173.5	27.41	114.7		183.7	28.32	114.7
	173.7	27.43	114.7		184.0	28.06	114.8
	174.0	27.44	114.7		184.2	28.41	114.8
	174.2	27.46	114.7		184.5	28.07	114.8
	174.5	27.47	114.7		184.7	28.50	114.8
	174.7	27.48	114.7		185.0	28.24	114.8
	175.0	27.49	114.7		185.2	28.28	114.8
	175.2	27.50	114.7	Shut-h(1)	185.5	28.63	114.8
	175.5	27.50	114.7		185.7	28.67	114.8
	175.7	27.51	114.7		186.0	28.39	114.8
	176.0	27.52	114.7		186.2	28.76	114.8
	176.2	27.54	114.7		186.5	28.49	114.8
	176.5	27.55	114.7		186.7	28.54	114.8
	176.7	27.57	114.7		187.0	28.90	114.8
	177.0	27.57	114.7		187.2	28.94	114.8
	177.2	27.58	114.7		187.5	28.99	114.8
	177.5	27.59	114.7		187.7	28.71	114.8
	177.7	27.60	114.7		188.0	28.76	114.8
	178.0	27.60	114.7		188.2	28.81	114.8
	178.2	27.61	114.7		188.5	28.84	114.8
	178.5	27.63	114.7		188.7	29.24	114.8
	178.7	27.64	114.7		189.0	28.93	114.8
	179.0	27.65	114.7		189.2	29.34	114.8
	179.2	27.67	114.7		189.5	29.00	114.8
	179.5	27.69	114.7		189.7	29.08	114.8
	179.7	27.71	114.7		190.0	29.51	114.8
	180.0	27.74	114.7		190.2	29.17	114.8
	180.2	27.77	114.7		190.5	29.28	114.8
	180.5	27.80	114.7		190.7	29.34	114.8
	180.7	27.84	114.7		191.0	29.30	114.8
	181.0	27.87	114.7		191.2	29.37	114.8
	181.2	27.90	114.7		191.5	29.51	114.8
	181.5	27.61	114.7		191.7	29.56	114.8
	181.7	27.99	114.7		192.0	29.56	114.8
	182.0	28.03	114.7		192.2	29.62	114.8

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	192.5	29.75	114.8		202.7	35.93	114.9
	192.7	29.78	114.8		203.0	35.77	114.9
	193.0	29.82	114.8		203.2	35.93	114.9
	193.2	29.83	114.8		203.5	36.03	114.9
	193.5	29.96	114.8		203.7	36.28	114.9
	193.7	30.05	114.8		204.0	36.50	114.9
	194.0	30.15	114.8		204.2	36.64	114.9
	194.2	30.24	114.8		204.5	36.77	115.0
	194.5	30.33	114.9		204.7	36.90	115.0
	194.7	30.51	114.9		205.0	37.02	115.0
	195.0	30.59	114.9		205.2	37.15	115.0
	195.2	30.65	114.9		205.5	37.33	115.0
	195.5	30.76	114.9		205.7	37.35	115.0
	195.7	30.82	114.9		206.0	37.61	115.0
	196.0	30.98	114.9		206.2	37.68	115.0
	196.2	31.12	114.9		206.5	37.93	115.0
	196.5	31.26	114.9		206.7	38.01	115.0
	196.7	31.38	114.9		207.0	38.18	115.0
	197.0	31.53	114.9		207.2	38.32	115.0
	197.2	31.63	114.9		207.5	38.45	115.0
	197.5	31.80	114.9		207.7	38.57	115.0
	197.7	31.82	114.9		208.0	38.70	115.0
	198.0	31.94	114.9		208.2	38.91	115.0
	198.2	32.08	114.9		208.5	39.02	115.0
	198.5	32.13	114.9		208.7	39.26	115.0
	198.7	32.33	114.9		209.0	39.39	115.0
	199.0	32.42	114.9		209.2	39.57	115.0
	199.2	32.58	114.9		209.5	39.74	115.0
	199.5	32.75	114.9		209.7	39.83	115.0
	199.7	32.88	114.9		210.0	39.98	115.0
	200.0	33.01	114.9		210.2	40.08	115.0
	200.2	33.11	114.9		210.5	40.29	115.0
	200.5	33.28	114.9		210.7	40.44	115.0
	200.7	33.67	114.9		211.0	40.59	115.0
	201.0	33.73	114.9		211.2	40.70	115.0
	201.2	33.78	114.9		211.5	40.89	115.0
	201.5	33.87	114.9		211.7	40.95	115.0
	201.7	33.91	114.9		212.0	41.17	115.0
	202.0	35.31	114.9		212.2	41.37	115.0
	202.2	35.53	114.9		212.5	41.36	115.0
	202.5	35.72	114.9		212.7	41.53	115.0

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	213.0	41.61	115.0		223.2	47.83	115.1
	213.2	41.87	115.0		223.5	48.04	115.1
	213.5	42.02	115.0		223.7	48.25	115.1
	213.7	42.08	115.0		224.0	48.34	115.1
	214.0	42.20	115.0		224.2	48.48	115.1
	214.2	42.43	115.0		224.5	48.54	115.2
	214.5	42.57	115.0		224.7	48.61	115.2
	214.7	42.63	115.1		225.0	48.88	115.2
	215.0	43.05	115.1		225.2	49.01	115.2
	215.2	43.13	115.1		225.5	49.09	115.2
	215.5	43.23	115.1		225.7	49.22	115.2
	215.7	43.40	115.1		226.0	49.42	115.2
	216.0	44.01	115.1		226.2	49.49	115.2
	216.2	44.20	115.1		226.5	49.71	115.2
	216.5	44.45	115.1		226.7	49.87	115.2
	216.7	44.33	115.1		227.0	49.91	115.2
	217.0	44.53	115.1		227.2	50.10	115.2
	217.2	44.71	115.1		227.5	50.20	115.2
	217.5	44.83	115.1		227.7	50.38	115.2
	217.7	44.94	115.1		228.0	50.47	115.2
	218.0	45.07	115.1		228.2	50.64	115.2
	218.2	45.21	115.1		228.5	50.77	115.2
	218.5	45.37	115.1		228.7	51.09	115.2
	218.7	45.39	115.1		229.0	51.22	115.2
	219.0	45.62	115.1		229.2	51.32	115.2
	219.2	45.80	115.1		229.5	51.53	115.2
	219.5	45.88	115.1		229.7	51.64	115.2
	219.7	45.97	115.1		230.0	51.84	115.2
	220.0	46.13	115.1		230.2	51.93	115.2
	220.2	46.26	115.1		230.5	52.09	115.2
	220.5	46.38	115.1		230.7	52.25	115.2
	220.7	46.54	115.1		231.0	52.33	115.2
	221.0	46.65	115.1		231.2	52.47	115.2
	221.2	46.77	115.1		231.5	52.57	115.2
	221.5	46.90	115.1		231.7	52.79	115.2
	221.7	47.02	115.1		232.0	52.97	115.2
	222.0	47.13	115.1		232.2	53.08	115.2
	222.2	47.39	115.1		232.5	53.20	115.2
	222.5	47.48	115.1		232.7	53.32	115.2
	222.7	47.59	115.1		233.0	53.48	115.2
	223.0	47.66	115.1		233.2	53.59	115.2

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	233.5	53.75	115.2		243.7	59.62	115.3
	233.7	53.89	115.2		244.0	59.74	115.3
	234.0	54.05	115.2		244.2	59.84	115.4
	234.2	54.16	115.3		244.5	59.96	115.4
	234.5	54.26	115.3		244.7	60.48	115.4
	234.7	54.40	115.3		245.0	60.54	115.4
	235.0	54.66	115.3		245.2	60.60	115.4
	235.2	54.75	115.3		245.5	60.65	115.4
	235.5	54.90	115.3	End Shut-In(1)	245.7	60.65	115.4
	235.7	55.01	115.3		246.0	60.47	115.4
	236.0	55.15	115.3	Open To Flow (2)	246.2	29.34	115.4
	236.2	55.28	115.3		246.5	29.14	115.3
	236.5	55.45	115.3		246.7	29.02	115.3
	236.7	55.57	115.3		247.0	28.95	115.3
	237.0	55.75	115.3		247.2	28.91	115.3
	237.2	55.88	115.3		247.5	28.89	115.3
	237.5	56.02	115.3		247.7	28.91	115.3
	237.7	56.15	115.3		248.0	28.92	115.3
	238.0	56.32	115.3		248.2	28.91	115.3
	238.2	56.47	115.3		248.5	28.91	115.3
	238.5	56.59	115.3		248.7	28.91	115.3
	238.7	56.70	115.3		249.0	28.91	115.3
	239.0	56.89	115.3		249.2	28.93	115.3
	239.2	57.01	115.3		249.5	28.93	115.4
	239.5	57.16	115.3		249.7	28.92	115.4
	239.7	57.26	115.3		250.0	28.92	115.4
	240.0	57.53	115.3		250.2	28.93	115.4
	240.2	57.57	115.3		250.5	28.93	115.4
	240.5	57.74	115.3		250.7	28.93	115.4
	240.7	57.83	115.3		251.0	28.93	115.4
	241.0	58.05	115.3		251.2	28.93	115.4
	241.2	58.20	115.3		251.5	28.94	115.4
	241.5	58.33	115.3		251.7	28.94	115.4
	241.7	58.39	115.3		252.0	28.94	115.4
	242.0	58.56	115.3		252.2	28.93	115.4
	242.2	58.69	115.3		252.5	28.93	115.4
	242.5	58.84	115.3		252.7	28.93	115.4
	242.7	59.03	115.3		253.0	28.93	115.4
	243.0	59.16	115.3		253.2	28.93	115.4
	243.2	59.37	115.3		253.5	28.93	115.4
	243.5	59.51	115.3		253.7	28.92	115.4

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	254.0	28.92	115.4		264.2	28.91	115.5
	254.2	28.92	115.4		264.5	28.90	115.5
	254.5	28.92	115.4		264.7	28.90	115.5
	254.7	28.92	115.4		265.0	28.90	115.5
	255.0	28.92	115.4		265.2	28.90	115.5
	255.2	28.92	115.4		265.5	28.89	115.5
	255.5	28.93	115.4		265.7	28.89	115.5
	255.7	28.93	115.4		266.0	28.89	115.5
	256.0	28.93	115.4		266.2	28.89	115.5
	256.2	28.93	115.4		266.5	28.89	115.5
	256.5	28.92	115.4		266.7	28.89	115.5
	256.7	28.92	115.4		267.0	28.89	115.5
	257.0	28.93	115.4		267.2	28.88	115.6
	257.2	28.93	115.4		267.5	28.88	115.6
	257.5	28.93	115.4		267.7	28.89	115.6
	257.7	28.93	115.5		268.0	28.89	115.6
	258.0	28.93	115.5		268.2	28.88	115.6
	258.2	28.93	115.5		268.5	28.88	115.6
	258.5	28.93	115.5		268.7	28.88	115.6
	258.7	28.93	115.5		269.0	28.88	115.6
	259.0	28.93	115.5		269.2	28.88	115.6
	259.2	28.94	115.5		269.5	28.89	115.6
	259.5	28.94	115.5		269.7	28.89	115.6
	259.7	28.94	115.5		270.0	28.89	115.6
	260.0	28.94	115.5		270.2	28.89	115.6
	260.2	28.94	115.5		270.5	28.89	115.6
	260.5	28.94	115.5		270.7	28.89	115.6
	260.7	28.93	115.5		271.0	28.89	115.6
	261.0	28.94	115.5		271.2	28.89	115.6
	261.2	28.94	115.5		271.5	28.89	115.6
	261.5	28.94	115.5		271.7	28.89	115.6
	261.7	28.94	115.5		272.0	28.89	115.6
	262.0	28.94	115.5		272.2	28.89	115.6
	262.2	28.94	115.5		272.5	28.89	115.6
	262.5	28.93	115.5		272.7	28.89	115.6
	262.7	28.92	115.5		273.0	28.88	115.6
	263.0	28.92	115.5		273.2	28.88	115.6
	263.2	28.91	115.5		273.5	28.88	115.6
	263.5	28.91	115.5		273.7	28.87	115.6
	263.7	28.91	115.5		274.0	28.86	115.6
	264.0	28.91	115.5		274.2	28.86	115.6

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	274.5	28.86	115.6		284.7	28.85	115.7
	274.7	28.86	115.6		285.0	28.85	115.7
	275.0	28.86	115.6		285.2	28.85	115.7
	275.2	28.85	115.6		285.5	28.85	115.7
	275.5	28.85	115.6		285.7	28.86	115.7
	275.7	28.85	115.6		286.0	28.86	115.7
	276.0	28.84	115.6		286.2	28.86	115.7
	276.2	28.84	115.6		286.5	28.86	115.7
	276.5	28.84	115.6		286.7	28.86	115.7
	276.7	28.84	115.6		287.0	28.86	115.8
	277.0	28.84	115.6		287.2	28.86	115.8
	277.2	28.85	115.7		287.5	28.86	115.8
	277.5	28.85	115.7		287.7	28.86	115.8
	277.7	28.85	115.7		288.0	28.86	115.8
	278.0	28.85	115.7		288.2	28.86	115.8
	278.2	28.85	115.7		288.5	28.86	115.8
	278.5	28.84	115.7		288.7	28.86	115.8
	278.7	28.85	115.7		289.0	28.86	115.8
	279.0	28.85	115.7		289.2	28.86	115.8
	279.2	28.85	115.7		289.5	28.86	115.8
	279.5	28.85	115.7		289.7	28.86	115.8
	279.7	28.85	115.7		290.0	28.85	115.8
	280.0	28.85	115.7		290.2	28.85	115.8
	280.2	28.85	115.7		290.5	28.86	115.8
	280.5	28.85	115.7		290.7	28.86	115.8
	280.7	28.85	115.7		291.0	28.86	115.8
	281.0	28.85	115.7		291.2	28.86	115.8
	281.2	28.85	115.7		291.5	28.87	115.8
	281.5	28.85	115.7		291.7	28.88	115.8
	281.7	28.85	115.7		292.0	28.88	115.8
	282.0	28.86	115.7		292.2	28.88	115.8
	282.2	28.85	115.7		292.5	28.88	115.8
	282.5	28.85	115.7		292.7	28.88	115.8
	282.7	28.86	115.7		293.0	28.88	115.8
	283.0	28.86	115.7		293.2	28.89	115.8
	283.2	28.86	115.7		293.5	28.89	115.8
	283.5	28.86	115.7		293.7	28.89	115.8
	283.7	28.86	115.7		294.0	28.88	115.8
	284.0	28.86	115.7		294.2	28.89	115.8
	284.2	28.85	115.7		294.5	28.88	115.8
	284.5	28.85	115.7		294.7	28.89	115.8

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	295.0	28.88	115.8		305.2	28.91	115.9
	295.2	28.88	115.8		305.5	28.92	115.9
	295.5	28.88	115.8		305.7	28.92	115.9
	295.7	28.88	115.8		306.0	28.93	115.9
	296.0	28.88	115.8		306.2	28.95	115.9
	296.2	28.89	115.8	Shut-in(2)	306.5	28.96	115.9
	296.5	28.89	115.8		306.7	28.97	115.9
	296.7	28.89	115.8		307.0	28.98	115.9
	297.0	28.89	115.8		307.2	29.00	115.9
	297.2	28.88	115.9		307.5	29.00	115.9
	297.5	28.88	115.9		307.7	29.02	116.0
	297.7	28.88	115.9		308.0	29.04	116.0
	298.0	28.88	115.9		308.2	29.05	116.0
	298.2	28.88	115.9		308.5	29.07	116.0
	298.5	28.88	115.9		308.7	29.08	116.0
	298.7	28.88	115.9		309.0	29.09	116.0
	299.0	28.88	115.9		309.2	29.10	116.0
	299.2	28.88	115.9		309.5	29.12	116.0
	299.5	28.88	115.9		309.7	29.13	116.0
	299.7	28.87	115.9		310.0	29.14	116.0
	300.0	28.87	115.9		310.2	29.16	116.0
	300.2	28.87	115.9		310.5	29.18	116.0
	300.5	28.88	115.9		310.7	29.19	116.0
	300.7	28.89	115.9		311.0	29.21	116.0
	301.0	28.89	115.9		311.2	29.22	116.0
	301.2	28.89	115.9		311.5	29.23	116.0
	301.5	28.89	115.9		311.7	29.25	116.0
	301.7	28.90	115.9		312.0	29.26	116.0
	302.0	28.90	115.9		312.2	29.28	116.0
	302.2	28.90	115.9		312.5	29.30	116.0
	302.5	28.91	115.9		312.7	29.32	116.0
	302.7	28.91	115.9		313.0	29.34	116.0
	303.0	28.90	115.9		313.2	29.35	116.0
	303.2	28.90	115.9		313.5	29.37	116.0
	303.5	28.90	115.9		313.7	29.38	116.0
	303.7	28.90	115.9		314.0	29.39	116.0
	304.0	28.91	115.9		314.2	29.41	116.0
	304.2	28.90	115.9		314.5	29.43	116.0
	304.5	28.91	115.9		314.7	29.45	116.0
	304.7	28.91	115.9		315.0	29.47	116.0
	305.0	28.91	115.9		315.2	29.49	116.0

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	315.5	29.51	116.0		325.7	30.24	116.1
	315.7	29.53	116.0		326.0	30.26	116.1
	316.0	29.55	116.0		326.2	30.29	116.1
	316.2	29.56	116.0		326.5	30.32	116.1
	316.5	29.57	116.0		326.7	30.34	116.1
	316.7	29.59	116.0		327.0	30.36	116.1
	317.0	29.61	116.0		327.2	30.39	116.1
	317.2	29.62	116.0		327.5	30.41	116.1
	317.5	29.64	116.0		327.7	30.43	116.1
	317.7	29.66	116.0		328.0	30.46	116.1
	318.0	29.68	116.0		328.2	30.48	116.1
	318.2	29.69	116.0		328.5	30.51	116.1
	318.5	29.70	116.0		328.7	30.54	116.1
	318.7	29.71	116.0		329.0	30.56	116.1
	319.0	29.73	116.1		329.2	30.59	116.1
	319.2	29.74	116.1		329.5	30.62	116.1
	319.5	29.75	116.1		329.7	30.64	116.1
	319.7	29.77	116.1		330.0	30.67	116.2
	320.0	29.79	116.1		330.2	30.70	116.2
	320.2	29.81	116.1		330.5	30.72	116.2
	320.5	29.83	116.1		330.7	30.76	116.2
	320.7	29.85	116.1		331.0	30.79	116.2
	321.0	29.87	116.1		331.2	30.82	116.2
	321.2	29.88	116.1		331.5	30.85	116.2
	321.5	29.90	116.1		331.7	30.89	116.2
	321.7	29.91	116.1		332.0	30.91	116.2
	322.0	29.93	116.1		332.2	30.95	116.2
	322.2	29.95	116.1		332.5	30.98	116.2
	322.5	29.98	116.1		332.7	31.01	116.2
	322.7	30.00	116.1		333.0	31.03	116.2
	323.0	30.02	116.1		333.2	31.07	116.2
	323.2	30.04	116.1		333.5	31.10	116.2
	323.5	30.06	116.1		333.7	31.14	116.2
	323.7	30.07	116.1		334.0	31.17	116.2
	324.0	30.09	116.1		334.2	31.20	116.2
	324.2	30.11	116.1		334.5	31.24	116.2
	324.5	30.13	116.1		334.7	31.27	116.2
	324.7	30.16	116.1		335.0	31.30	116.2
	325.0	30.17	116.1		335.2	31.33	116.2
	325.2	30.20	116.1		335.5	31.36	116.2
	325.5	30.22	116.1		335.7	31.39	116.2

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	336.0	31.43	116.2		346.2	32.81	116.3
	336.2	31.46	116.2		346.5	33.19	116.3
	336.5	31.50	116.2		346.7	33.23	116.3
	336.7	31.53	116.2		347.0	32.92	116.3
	337.0	31.57	116.2		347.2	33.32	116.3
	337.2	31.60	116.2		347.5	33.38	116.3
	337.5	31.64	116.2		347.7	33.42	116.3
	337.7	31.67	116.2		348.0	33.47	116.3
	338.0	31.71	116.2		348.2	33.20	116.3
	338.2	31.75	116.2		348.5	33.23	116.3
	338.5	31.79	116.2		348.7	33.31	116.3
	338.7	31.84	116.2		349.0	33.32	116.3
	339.0	31.88	116.2		349.2	33.40	116.3
	339.2	31.93	116.2		349.5	33.47	116.3
	339.5	31.96	116.2		349.7	33.46	116.3
	339.7	32.00	116.2		350.0	33.53	116.3
	340.0	31.71	116.2		350.2	33.52	116.3
	340.2	32.10	116.2		350.5	33.64	116.3
	340.5	32.15	116.2		350.7	34.02	116.3
	340.7	32.19	116.2		351.0	33.73	116.3
	341.0	31.91	116.2		351.2	34.10	116.3
	341.2	31.97	116.2		351.5	34.14	116.3
	341.5	32.01	116.2		351.7	34.18	116.3
	341.7	32.37	116.2		352.0	34.23	116.3
	342.0	32.42	116.2		352.2	34.27	116.3
	342.2	32.46	116.3		352.5	34.32	116.3
	342.5	32.19	116.3		352.7	34.01	116.3
	342.7	32.14	116.3		353.0	34.42	116.3
	343.0	32.28	116.3		353.2	34.46	116.3
	343.2	32.33	116.3		353.5	34.19	116.3
	343.5	32.69	116.3		353.7	34.56	116.3
	343.7	32.72	116.3		354.0	34.30	116.3
	344.0	32.76	116.3		354.2	34.25	116.3
	344.2	32.80	116.3		354.5	34.40	116.3
	344.5	32.84	116.3		354.7	34.76	116.4
	344.7	32.54	116.3		355.0	34.43	116.4
	345.0	32.93	116.3		355.2	34.86	116.4
	345.2	32.97	116.3		355.5	34.56	116.4
	345.5	33.02	116.3		355.7	34.66	116.4
	345.7	33.06	116.3		356.0	35.00	116.4
	346.0	33.10	116.3		356.2	34.71	116.4

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	356.5	34.70	116.4		366.7	36.79	116.4
	356.7	34.85	116.4		367.0	36.84	116.4
	357.0	35.21	116.4		367.2	37.19	116.4
	357.2	34.90	116.4		367.5	37.24	116.4
	357.5	35.30	116.4		367.7	36.95	116.4
	357.7	34.98	116.4		368.0	37.33	116.5
	358.0	35.08	116.4		368.2	37.37	116.5
	358.2	35.14	116.4		368.5	37.42	116.5
	358.5	35.17	116.4		368.7	37.14	116.5
	358.7	35.23	116.4		369.0	37.21	116.5
	359.0	35.29	116.4		369.2	37.21	116.5
	359.2	35.31	116.4		369.5	37.30	116.5
	359.5	35.36	116.4		369.7	37.33	116.5
	359.7	35.41	116.4		370.0	37.35	116.5
	360.0	35.79	116.4		370.2	37.45	116.5
	360.2	35.84	116.4		370.5	37.51	116.5
	360.5	35.89	116.4		370.7	37.56	116.5
	360.7	35.57	116.4		371.0	37.55	116.5
	361.0	35.66	116.4		371.2	37.68	116.5
	361.2	35.70	116.4		371.5	37.68	116.5
	361.5	36.09	116.4		371.7	37.69	116.5
	361.7	35.77	116.4		372.0	38.16	116.5
	362.0	35.86	116.4		372.2	38.20	116.5
	362.2	36.22	116.4		372.5	38.25	116.5
	362.5	35.95	116.4		372.7	38.00	116.5
	362.7	36.01	116.4		373.0	38.34	116.5
	363.0	36.06	116.4		373.2	38.08	116.5
	363.2	36.07	116.4		373.5	38.12	116.5
	363.5	36.15	116.4		373.7	38.15	116.5
	363.7	36.51	116.4		374.0	38.22	116.5
	364.0	36.25	116.4		374.2	38.27	116.5
	364.2	36.31	116.4		374.5	38.31	116.5
	364.5	36.36	116.4		374.7	38.38	116.5
	364.7	36.39	116.4		375.0	38.42	116.5
	365.0	36.44	116.4		375.2	38.43	116.5
	365.2	36.41	116.4		375.5	38.51	116.5
	365.5	36.50	116.4		375.7	38.57	116.5
	365.7	36.59	116.4		376.0	38.63	116.5
	366.0	36.62	116.4		376.2	38.61	116.5
	366.2	37.01	116.4		376.5	38.67	116.5
	366.5	36.71	116.4		376.7	38.80	116.5

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	377.0	38.81	116.5		387.2	40.98	116.6
	377.2	38.81	116.5		387.5	41.04	116.6
	377.5	38.90	116.5		387.7	41.08	116.6
	377.7	38.99	116.5		388.0	41.12	116.6
	378.0	39.38	116.5		388.2	41.21	116.6
	378.2	39.08	116.5		388.5	41.23	116.6
	378.5	39.11	116.5		388.7	41.25	116.6
	378.7	39.17	116.5		389.0	41.35	116.6
	379.0	39.23	116.5		389.2	41.41	116.6
	379.2	39.31	116.5		389.5	41.46	116.6
	379.5	39.35	116.5		389.7	41.49	116.6
	379.7	39.40	116.5		390.0	41.54	116.6
	380.0	39.51	116.5		390.2	41.62	116.6
	380.2	39.50	116.5		390.5	41.64	116.6
	380.5	39.57	116.5		390.7	41.76	116.6
	380.7	39.66	116.5		391.0	41.79	116.6
	381.0	39.67	116.5		391.2	41.85	116.6
	381.2	39.70	116.5		391.5	41.80	116.6
	381.5	39.80	116.5		391.7	41.93	116.6
	381.7	39.79	116.5		392.0	42.01	116.6
	382.0	40.24	116.6		392.2	42.04	116.6
	382.2	39.95	116.6		392.5	42.03	116.6
	382.5	39.96	116.6		392.7	42.17	116.6
	382.7	40.08	116.6		393.0	42.18	116.6
	383.0	40.46	116.6		393.2	42.26	116.6
	383.2	40.50	116.6		393.5	42.61	116.6
	383.5	40.23	116.6		393.7	42.35	116.6
	383.7	40.20	116.6		394.0	42.41	116.6
	384.0	40.28	116.6		394.2	42.43	116.6
	384.2	40.35	116.6		394.5	42.83	116.6
	384.5	40.44	116.6		394.7	42.53	116.6
	384.7	40.47	116.6		395.0	42.58	116.6
	385.0	40.54	116.6		395.2	42.65	116.6
	385.2	40.56	116.6		395.5	42.68	116.6
	385.5	40.95	116.6		395.7	42.65	116.6
	385.7	41.00	116.6		396.0	42.81	116.7
	386.0	40.70	116.6		396.2	42.86	116.7
	386.2	40.80	116.6		396.5	42.84	116.7
	386.5	40.79	116.6		396.7	42.95	116.7
	386.7	40.85	116.6		397.0	43.05	116.7
	387.0	40.88	116.6		397.2	43.08	116.7

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	397.5	43.44	116.7		407.7	45.16	116.7
	397.7	43.16	116.7		408.0	45.27	116.7
	398.0	43.22	116.7		408.2	45.32	116.7
	398.2	43.26	116.7		408.5	45.37	116.7
	398.5	43.63	116.7		408.7	45.45	116.7
	398.7	43.68	116.7		409.0	45.44	116.7
	399.0	43.72	116.7		409.2	45.51	116.7
	399.2	43.43	116.7		409.5	45.59	116.7
	399.5	43.82	116.7		409.7	45.64	116.7
	399.7	43.54	116.7		410.0	45.64	116.7
	400.0	43.58	116.7		410.2	45.72	116.7
	400.2	43.98	116.7		410.5	45.78	116.7
	400.5	43.65	116.7		410.7	46.14	116.8
	400.7	43.71	116.7		411.0	46.19	116.8
	401.0	43.78	116.7		411.2	46.24	116.8
	401.2	43.87	116.7		411.5	45.94	116.8
	401.5	43.88	116.7		411.7	45.98	116.8
	401.7	43.97	116.7		412.0	46.08	116.8
	402.0	43.95	116.7		412.2	46.07	116.8
	402.2	44.03	116.7		412.5	46.17	116.8
	402.5	44.09	116.7		412.7	46.54	116.8
	402.7	44.17	116.7		413.0	46.24	116.8
	403.0	44.24	116.7		413.2	46.34	116.8
	403.2	44.30	116.7		413.5	46.31	116.8
	403.5	44.30	116.7		413.7	46.42	116.8
	403.7	44.34	116.7		414.0	46.46	116.8
	404.0	44.76	116.7		414.2	46.51	116.8
	404.2	44.80	116.7		414.5	46.58	116.8
	404.5	44.55	116.7		414.7	46.65	116.8
	404.7	44.52	116.7		415.0	46.67	116.8
	405.0	44.63	116.7		415.2	46.71	116.8
	405.2	44.68	116.7		415.5	46.79	116.8
	405.5	44.71	116.7		415.7	46.82	116.8
	405.7	45.12	116.7		416.0	46.82	116.8
	406.0	44.82	116.7		416.2	46.90	116.8
	406.2	44.85	116.7		416.5	47.01	116.8
	406.5	44.97	116.7		416.7	46.97	116.8
	406.7	44.98	116.7		417.0	47.09	116.8
	407.0	45.05	116.7		417.2	47.49	116.8
	407.2	45.03	116.7		417.5	47.19	116.8
	407.5	45.10	116.7		417.7	47.23	116.8

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	418.0	47.65	116.8		428.2	2269.23	117.6
	418.2	47.28	116.8		428.5	2215.49	117.6
	418.5	47.42	116.8		428.7	2204.46	117.7
	418.7	47.42	116.8		429.0	2197.32	117.8
	419.0	47.43	116.8	Final Hydro-static	429.2	2288.27	118.0
	419.2	47.62	116.8		429.5	2283.60	117.9
	419.5	47.61	116.8		429.7	2278.90	117.9
	419.7	47.66	116.8		430.0	2278.27	117.9
	420.0	47.73	116.8		430.2	2274.12	117.9
	420.2	47.83	116.8		430.5	2271.01	117.8
	420.5	47.87	116.8		430.7	2268.38	117.8
	420.7	47.87	116.8		431.0	2266.39	117.8
	421.0	47.96	116.8		431.2	2264.74	117.8
	421.2	47.99	116.8		431.5	2263.38	117.8
	421.5	48.04	116.8		431.7	2262.42	117.8
	421.7	48.13	116.8		432.0	2262.18	117.8
	422.0	48.17	116.8		432.2	2261.75	117.8
	422.2	48.22	116.8		432.5	2261.34	117.8
	422.5	48.22	116.8		432.7	2261.00	117.8
	422.7	48.65	116.8		433.0	2260.66	117.8
	423.0	48.28	116.8		433.2	2260.39	117.8
	423.2	48.42	116.8		433.5	2260.21	117.7
	423.5	48.46	116.8		433.7	2259.65	117.7
	423.7	48.79	116.8		434.0	2259.51	117.7
	424.0	48.82	116.8		434.2	2259.36	117.7
	424.2	48.84	116.8		434.5	2179.33	117.7
	424.5	48.86	116.8		434.7	2167.12	117.6
	424.7	48.89	116.8		435.0	2316.30	117.6
	425.0	48.91	116.8		435.2	2274.83	117.5
	425.2	48.93	116.8		435.5	2272.89	117.5
	425.5	48.95	116.8		435.7	2268.53	117.5
	425.7	48.98	116.8		436.0	2263.30	117.5
	426.0	49.02	116.9		436.2	2258.71	117.4
End Shut-in(2)	426.2	49.08	116.9		436.5	2255.07	117.4
	426.5	1268.79	117.5		436.7	2252.24	117.4
	426.7	1257.68	117.2		437.0	2250.20	117.4
	427.0	1231.82	117.2		437.2	2185.27	117.4
	427.2	1214.63	117.2		437.5	2267.80	117.4
	427.5	2267.80	117.5		437.7	2376.86	117.2
	427.7	2273.56	117.5		438.0	2262.67	117.0
	428.0	2271.18	117.6		438.2	2258.32	117.0

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	438.5	2145.19	116.9		448.7	1865.64	110.9
	438.7	2129.56	116.8		449.0	2001.63	110.6
	439.0	2108.60	116.7		449.2	1998.53	110.6
	439.2	2068.41	116.4		449.5	1993.68	110.5
	439.5	2233.87	115.9		449.7	1925.11	110.5
	439.7	2231.27	115.6		450.0	1870.13	110.4
	440.0	2235.13	115.6		450.2	1832.59	110.2
	440.2	2230.47	115.5		450.5	1955.56	109.9
	440.5	2225.89	115.5		450.7	1954.22	109.6
	440.7	2222.10	115.5		451.0	1950.81	109.6
	441.0	2075.19	115.4		451.2	1946.30	109.6
	441.2	2047.70	115.2		451.5	1843.20	109.5
	441.5	2030.22	114.9		451.7	1815.82	109.5
	441.7	2188.58	114.5		452.0	1792.77	109.3
	442.0	2189.93	114.3		452.2	1906.89	109.0
	442.2	2190.63	114.2		452.5	1906.91	108.9
	442.5	2186.29	114.1		452.7	1901.95	108.8
	442.7	2181.65	114.1		453.0	1898.74	108.8
	443.0	2083.97	114.1		453.2	1802.67	108.8
	443.2	2031.55	114.0		453.5	1769.54	108.5
	443.5	1995.14	113.8		453.7	1787.16	108.2
	443.7	2183.93	113.7		454.0	1860.28	107.8
	444.0	2142.64	113.4		454.2	1859.69	107.8
	444.2	2140.66	113.4		454.5	1855.21	107.8
	444.5	2135.72	113.3		454.7	1852.55	107.8
	444.7	2016.19	113.3		455.0	1750.64	107.7
	445.0	1979.15	113.2		455.2	1729.03	107.5
	445.2	1959.78	113.0		455.5	1739.17	107.2
	445.5	2080.65	112.7		455.7	1813.66	106.9
	445.7	2096.37	112.4		456.0	1810.58	106.8
	446.0	2091.54	112.4		456.2	1807.26	106.8
	446.2	2086.79	112.4		456.5	1738.15	106.8
	446.5	1954.54	112.3		456.7	1707.03	106.7
	446.7	1917.23	112.1		457.0	1669.30	106.4
	447.0	1912.48	111.9		457.2	1770.97	106.2
	447.2	2054.95	111.6		457.5	1765.91	106.0
	447.5	2048.57	111.5		457.7	1761.84	105.9
	447.7	2043.29	111.4		458.0	1759.41	105.9
	448.0	2038.91	111.4		458.2	1670.42	105.9
	448.2	1911.06	111.4		458.5	1646.58	105.7
	448.5	1894.62	111.2		458.7	1613.67	105.4

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	459.0	1719.25	105.2		469.2	1359.31	99.7
	459.2	1716.00	105.1		469.5	1339.03	99.6
	459.5	1713.28	105.1		469.7	1434.85	99.4
	459.7	1657.57	105.1		470.0	1394.22	99.1
	460.0	1608.93	104.9		470.2	1391.44	99.1
	460.2	1591.97	104.6		470.5	1389.88	99.1
	460.5	1664.68	104.2		470.7	1317.57	99.0
	460.7	1671.04	104.1		471.0	1301.60	98.9
	461.0	1667.78	104.0		471.2	1348.27	98.7
	461.2	1581.03	104.0		471.5	1349.31	98.6
	461.5	1570.99	103.8		471.7	1346.81	98.5
	461.7	1542.62	103.5		472.0	1345.18	98.4
	462.0	1626.77	103.4		472.2	1344.21	98.4
	462.2	1624.44	103.3		472.5	1343.52	98.4
	462.5	1621.82	103.2		472.7	1326.78	98.4
	462.7	1619.98	103.2		473.0	1272.73	98.4
	463.0	1542.58	103.1		473.2	1252.28	98.3
	463.2	1518.96	102.9		473.5	1337.04	98.1
	463.5	1495.58	102.7		473.7	1303.14	97.9
	463.7	1579.68	102.4		474.0	1300.74	97.8
	464.0	1576.62	102.3		474.2	1260.43	97.8
	464.2	1574.24	102.3		474.5	1226.72	97.7
	464.5	1494.99	102.2		474.7	1207.11	97.5
	464.7	1472.40	102.0		475.0	1252.16	97.3
	465.0	1449.84	101.8		475.2	1256.27	97.1
	465.2	1532.47	101.5		475.5	1254.18	97.1
	465.5	1530.73	101.4		475.7	1232.09	97.1
	465.7	1528.15	101.4		476.0	1189.63	97.0
	466.0	1448.74	101.4		476.2	1155.16	96.9
	466.2	1429.95	101.2		476.5	1252.32	96.7
	466.5	1406.06	100.9		476.7	1209.04	96.5
	466.7	1486.08	100.7		477.0	1207.09	96.4
	467.0	1483.87	100.7		477.2	1205.96	96.4
	467.2	1481.75	100.6		477.5	1143.95	96.3
	467.5	1414.86	100.6		477.7	1124.45	96.3
	467.7	1387.04	100.4		478.0	1151.53	96.1
	468.0	1362.26	100.2		478.2	1163.22	96.0
	468.2	1439.71	99.9		478.5	1161.55	95.9
	468.5	1437.28	99.8		478.7	1160.50	95.9
	468.7	1435.31	99.8		479.0	1109.77	95.9
	469.0	1432.06	99.8		479.2	1087.42	95.8

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	479.5	1065.86	95.6		489.7	789.92	90.5
	479.7	1115.91	95.4		490.0	672.11	90.4
	480.0	1114.62	95.3		490.2	734.44	90.1
	480.2	1113.62	95.3		490.5	745.81	89.8
	480.5	1068.61	95.3		490.7	745.04	89.8
	480.7	1048.92	95.2		491.0	745.00	89.7
	481.0	1034.24	95.1		491.2	733.34	89.7
	481.2	1070.45	94.9		491.5	637.63	89.6
	481.5	1068.95	94.8		491.7	720.89	89.4
	481.7	1068.21	94.7		492.0	701.21	89.2
	482.0	1017.69	94.7		492.2	700.39	89.1
	482.2	989.97	94.6		492.5	695.67	89.1
	482.5	1017.88	94.3		492.7	583.85	89.0
	482.7	1022.53	94.1		493.0	648.84	88.7
	483.0	1021.30	94.0		493.2	654.61	88.6
	483.2	1020.73	94.0		493.5	654.76	88.5
	483.5	912.21	93.9		493.7	654.24	88.5
	483.7	965.19	93.6		494.0	627.55	88.5
	484.0	975.91	93.4		494.2	549.87	88.4
	484.2	974.70	93.4		494.5	614.09	88.2
	484.5	974.47	93.3		494.7	608.09	88.0
	484.7	865.08	93.2		495.0	607.54	88.0
	485.0	941.81	93.1		495.2	578.91	88.0
	485.2	929.47	92.9		495.5	513.88	87.9
	485.5	928.19	92.8		495.7	558.79	87.8
	485.7	927.95	92.7		496.0	562.74	87.7
	486.0	822.63	92.6		496.2	562.50	87.6
	486.2	891.38	92.4		496.5	555.74	87.6
	486.5	882.22	92.1		496.7	485.67	87.5
	486.7	881.40	92.1		497.0	523.08	87.5
	487.0	880.88	92.0		497.2	517.03	87.4
	487.2	822.27	92.0		497.5	516.74	87.4
	487.5	779.55	91.8		497.7	516.68	87.4
	487.7	838.06	91.6		498.0	445.21	87.3
	488.0	837.21	91.5		498.2	473.63	87.3
	488.2	836.70	91.5		498.5	471.06	87.3
	488.5	811.49	91.4		498.7	471.02	87.3
	488.7	711.51	91.3		499.0	470.98	87.3
	489.0	788.14	90.9		499.2	400.40	87.2
	489.2	790.92	90.7		499.5	445.72	87.3
	489.5	790.09	90.6		499.7	425.27	87.3

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	500.0	425.19	87.3		510.2	197.08	89.1
	500.2	425.21	87.3		510.5	197.14	89.1
	500.5	398.03	87.3		510.7	197.16	89.1
	500.7	349.73	87.3		511.0	174.38	89.1
	501.0	386.24	87.4		511.2	157.09	89.2
	501.2	379.93	87.5		511.5	122.23	89.2
	501.5	379.97	87.5		511.7	139.18	89.5
	501.7	379.98	87.5		512.0	148.43	89.5
	502.0	340.24	87.5		512.2	149.20	89.6
	502.2	289.26	87.6		512.5	149.98	89.6
	502.5	334.19	87.7		512.7	150.31	89.6
	502.7	334.78	87.8		513.0	150.27	89.6
	503.0	334.79	87.8		513.2	150.53	89.6
	503.2	307.31	87.8		513.5	151.11	89.6
	503.5	261.69	87.8		513.7	151.24	89.6
	503.7	287.42	88.0		514.0	151.40	89.6
	504.0	288.09	88.1		514.2	140.28	89.6
	504.2	288.06	88.1		514.5	124.80	89.6
	504.5	269.51	88.1		514.7	94.99	89.7
	504.7	237.55	88.2		515.0	93.48	89.8
	505.0	235.70	88.4		515.2	103.41	89.9
	505.2	242.79	88.6		515.5	104.93	90.0
	505.5	243.18	88.6		515.7	105.13	90.0
	505.7	243.30	88.6		516.0	105.54	90.0
	506.0	243.37	88.6		516.2	106.05	90.0
	506.2	243.31	88.7		516.5	106.17	90.0
	506.5	243.34	88.7		516.7	106.33	90.0
	506.7	205.89	88.6		517.0	104.72	90.0
	507.0	184.19	88.7		517.2	106.43	90.0
	507.2	190.44	88.9		517.5	102.23	90.1
	507.5	195.60	89.0		517.7	87.43	90.1
	507.7	195.91	89.1		518.0	70.36	90.2
	508.0	195.98	89.1		518.2	47.38	90.5
	508.2	196.54	89.1		518.5	61.37	91.0
	508.5	196.62	89.1		518.7	61.91	91.2
	508.7	196.73	89.1		519.0	61.90	91.3
	509.0	196.83	89.1		519.2	61.95	91.3
	509.2	196.91	89.1		519.5	61.98	91.4
	509.5	196.99	89.1		519.7	62.01	91.4
	509.7	197.02	89.1		520.0	62.06	91.4
	510.0	197.04	89.1		520.2	62.09	91.4

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	520.5	62.10	91.4		530.7	3.02	91.1
	520.7	62.09	91.4		531.0	3.01	91.1
	521.0	62.09	91.4		531.2	3.02	91.1
	521.2	62.07	91.4		531.5	3.02	91.1
	521.5	62.06	91.4		531.7	3.02	91.1
	521.7	62.04	91.3		532.0	3.01	91.1
	522.0	62.03	91.3		532.2	3.01	91.1
	522.2	62.01	91.3		532.5	3.01	91.1
	522.5	62.00	91.3		532.7	3.00	91.1
	522.7	61.99	91.3		533.0	3.00	91.1
	523.0	61.98	91.3		533.2	3.00	91.1
	523.2	61.98	91.3		533.5	3.00	91.1
	523.5	61.98	91.3		533.7	3.00	91.1
	523.7	61.97	91.3		534.0	3.00	91.1
	524.0	61.97	91.3		534.2	3.00	91.1
	524.2	61.98	91.3		534.5	2.99	91.1
	524.5	61.96	91.3		534.7	2.99	91.1
	524.7	61.95	91.3		535.0	2.98	91.1
	525.0	61.95	91.3		535.2	2.98	91.1
	525.2	61.94	91.3		535.5	2.98	91.1
	525.5	61.93	91.3		535.7	2.98	91.1
	525.7	61.93	91.3		536.0	2.98	91.1
	526.0	61.92	91.3		536.2	2.97	91.1
	526.2	61.89	91.3		536.5	2.96	91.1
	526.5	40.08	91.3		536.7	2.96	91.1
	526.7	10.29	91.2		537.0	2.95	91.1
	527.0	3.61	91.2		537.2	2.94	91.1
	527.2	3.62	91.1		537.5	2.94	91.1
	527.5	3.61	91.1		537.7	2.93	91.1
	527.7	3.58	91.1		538.0	2.91	91.1
	528.0	3.53	91.0		538.2	2.90	91.1
	528.2	3.53	91.1		538.5	2.88	91.1
	528.5	3.49	91.1		538.7	2.87	91.1
	528.7	3.42	91.1		539.0	2.85	91.1
	529.0	3.31	91.1		539.2	2.82	91.1
	529.2	3.24	91.1		539.5	2.81	91.1
	529.5	3.19	91.1		539.7	2.78	91.1
	529.7	3.63	91.1		540.0	2.77	91.1
	530.0	3.54	91.1		540.2	2.78	91.1
	530.2	3.05	91.1		540.5	2.76	91.1
	530.5	3.04	91.1		540.7	2.73	91.1

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	541.0	2.70	91.1		551.2	0.85	90.8
	541.2	2.68	91.1		551.5	0.85	90.8
	541.5	2.67	91.1		551.7	0.84	90.8
	541.7	2.67	91.1		552.0	0.83	90.8
	542.0	2.67	91.1		552.2	0.82	90.8
	542.2	2.66	91.1		552.5	0.81	90.8
	542.5	2.66	91.1		552.7	0.81	90.8
	542.7	2.66	91.1		553.0	0.80	90.8
	543.0	2.65	91.1		553.2	0.79	90.8
	543.2	2.66	91.1		553.5	0.78	90.8
	543.5	3.06	91.0		553.7	0.76	90.8
	543.7	2.54	91.0		554.0	0.75	90.8
	544.0	2.53	91.0		554.2	0.75	90.8
	544.2	2.50	91.0		554.5	0.75	90.8
	544.5	2.48	91.0		554.7	0.74	90.8
	544.7	1.79	91.0		555.0	0.74	90.8
	545.0	1.66	91.0		555.2	0.73	90.8
	545.2	1.55	91.0		555.5	0.72	90.8
	545.5	1.46	91.0		555.7	0.72	90.8
	545.7	1.41	91.0		556.0	0.71	90.8
	546.0	1.36	91.0		556.2	0.71	90.8
	546.2	1.33	91.0		556.5	0.71	90.8
	546.5	1.28	91.0		556.7	0.71	90.8
	546.7	1.25	90.9		557.0	0.71	90.8
	547.0	1.21	90.9		557.2	0.70	90.8
	547.2	1.17	90.9		557.5	0.70	90.7
	547.5	1.13	90.9		557.7	0.68	90.7
	547.7	1.09	90.9		558.0	0.66	90.6
	548.0	1.06	90.9		558.2	0.65	90.5
	548.2	1.04	90.9		558.5	0.65	90.3
	548.5	1.02	90.9		558.7	0.64	90.2
	548.7	1.00	90.9		559.0	0.64	90.2
	549.0	0.98	90.9		559.2	0.64	89.9
	549.2	0.96	90.9		559.5	0.63	89.7
	549.5	0.93	90.9		559.7	0.63	89.5
	549.7	0.93	90.9		560.0	0.61	89.2
	550.0	0.92	90.9		560.2	0.59	88.7
	550.2	0.90	90.9		560.5	0.59	87.0
	550.5	0.89	90.9		560.7	0.58	85.2
	550.7	0.87	90.8		561.0	0.57	85.1
	551.0	0.87	90.8		561.2	0.58	85.6

Printing every 1 samples

Serial # 8017 Inside				Serial # 8017 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	561.5	0.58	86.4		571.7	0.91	105.0
	561.7	0.58	87.1		572.0	0.92	105.2
	562.0	0.57	88.0		572.2	0.95	105.5
	562.2	0.56	89.2		572.5	0.99	105.7
	562.5	0.53	90.3		572.7	0.97	105.8
	562.7	0.51	91.4		573.2	0.26	106.0
	563.0	0.50	92.5		573.5	0.36	105.8
	563.2	0.49	93.6		573.7	0.32	104.7
	563.5	0.49	94.5		574.0	0.36	104.5
	563.7	0.49	95.3		574.2	0.25	104.3
	564.0	0.48	96.0		574.5	0.42	103.9
	564.2	0.48	96.6		574.7	0.31	103.8
	564.5	0.47	97.2		575.0	0.20	103.7
	564.7	0.47	97.8		575.2	0.31	103.7
	565.0	0.46	98.3		575.5	0.22	103.7
	565.2	0.46	98.9		575.7	0.22	103.7
	565.5	0.47	99.4		576.0	0.21	103.2
	565.7	0.48	99.9		576.2	0.26	102.5
	566.0	0.49	100.3				
	566.2	0.50	100.7				
	566.5	0.52	101.1				
	566.7	0.53	101.6				
	567.0	0.55	102.0				
	567.2	0.57	102.3				
	567.5	0.58	102.5				
	567.7	0.60	102.9				
	568.0	0.63	103.1				
	568.2	0.65	103.3				
	568.5	0.68	103.5				
	568.7	0.70	103.6				
	569.0	0.72	103.8				
	569.2	0.75	103.9				
	569.5	0.78	104.0				
	569.7	0.80	104.1				
	570.0	0.81	104.1				
	570.2	0.82	104.2				
	570.5	0.83	104.2				
	570.7	0.84	104.4				
	571.0	0.86	104.5				
	571.2	0.88	104.6				
	571.5	0.89	104.8				

Printing every 1 samples



**Weatherford®**  
**Completion Systems**

**DRILL STEM TESTING - DATA LISTING**

EOG Resources

LaRue 11-#1

Oklahoma City, OK

S.11-22s-34wFinney

Job Ticket: 31373

DST#: 2

ATTN: Gary Brock

Test Start: 2008.08.03 @ 05:15:10

Serial # 8351	Inside			Serial # 8351	Inside		
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	0.0	-1.65	76.8		0.6	-1.70	78.5
	0.0	-1.75	77.0		0.6	-1.69	78.5
	0.0	-1.82	77.1		0.6	-1.70	78.6
	0.1	-1.86	77.2		0.6	-1.69	78.6
	0.1	-1.86	77.3		0.6	-1.68	78.6
	0.1	-1.85	77.4		0.6	-1.68	78.6
	0.1	-1.84	77.6		0.6	-1.66	78.6
	0.1	-1.83	77.7		0.7	-1.66	78.7
	0.1	-1.82	77.8		0.7	-1.65	78.7
	0.2	-1.82	77.9		0.7	-1.65	78.7
	0.2	-1.82	78.0		0.7	-1.65	78.7
	0.2	-1.81	78.0		0.7	-1.64	78.7
	0.2	-1.81	78.1		0.8	-1.64	78.7
	0.2	-1.81	78.2		0.8	-1.63	78.7
	0.2	-1.79	78.2		0.8	-1.63	78.7
	0.3	-1.80	78.3		0.8	-1.62	78.7
	0.3	-1.79	78.3		0.8	-1.61	78.6
	0.3	-1.78	78.3		0.8	-1.61	78.6
	0.3	-1.78	78.4		0.9	-1.61	78.6
	0.3	-1.77	78.4		0.9	-1.61	78.6
	0.3	-1.77	78.4		0.9	-1.61	78.6
	0.3	-1.76	78.4		0.9	-1.62	78.6
	0.4	-1.75	78.5		0.9	-1.62	78.6
	0.4	-1.74	78.5		0.9	-1.61	78.5
	0.4	-1.74	78.5		0.9	-1.60	78.5
	0.4	-1.74	78.5		1.0	-1.59	78.5
	0.4	-1.72	78.5		1.0	-1.58	78.5
	0.4	-1.72	78.5		1.0	-1.58	78.5
	0.5	-1.71	78.5		1.0	-1.58	78.5
	0.5	-1.71	78.5		1.0	-1.58	78.4
	0.5	-1.71	78.5		1.0	-1.58	78.4
	0.5	-1.70	78.5		1.1	-1.57	78.4
	0.5	-1.71	78.5		1.1	-1.56	78.4

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	1.1	-1.56	78.4		1.8	-1.60	77.5
	1.1	-1.55	78.4		1.8	-1.64	77.5
	1.1	-1.55	78.3		1.8	-1.67	77.4
	1.1	-1.55	78.3		1.8	-1.69	77.4
	1.2	-1.55	78.3		1.9	-1.71	77.4
	1.2	-1.55	78.3		1.9	-1.72	77.4
	1.2	-1.56	78.2		1.9	-1.73	77.4
	1.2	-1.55	78.2		1.9	-1.75	77.3
	1.2	-1.55	78.2		1.9	-1.76	77.3
	1.3	-1.55	78.2		1.9	-1.78	77.3
	1.3	-1.56	78.1		2.0	-1.80	77.3
	1.3	-1.56	78.1		2.0	-1.84	77.3
	1.3	-1.56	78.1		2.0	-1.56	77.2
	1.3	-1.56	78.0		7.0	-1.98	73.3
	1.4	-1.56	78.0		12.0	-2.00	71.7
	1.4	-1.57	78.0		17.0	-1.94	71.0
	1.4	-1.56	78.0		22.0	-1.90	72.9
	1.4	-1.56	78.0		27.0	11.27	96.4
	1.4	-1.56	77.9		32.0	11.29	95.3
	1.4	-1.56	77.9		37.0	9.85	93.1
	1.5	-1.56	77.9		42.0	56.57	96.6
	1.5	-1.56	77.9		47.0	102.13	96.8
	1.5	-1.56	77.9		52.0	100.96	97.0
	1.5	-1.55	77.8		57.0	146.20	96.6
	1.5	-1.55	77.8		62.0	191.34	96.5
	1.5	-1.55	77.8		67.0	332.05	96.6
	1.5	-1.55	77.8		72.0	421.83	97.0
	1.5	-1.55	77.8		77.0	435.63	97.0
	1.6	-1.54	77.8		82.0	528.88	97.9
	1.6	-1.55	77.7		87.0	742.37	99.0
	1.6	-1.55	77.7		87.2	768.58	99.2
	1.6	-1.55	77.7		87.5	746.32	99.3
	1.6	-1.55	77.7		87.7	744.82	99.1
	1.6	-1.55	77.7		88.0	743.98	99.0
	1.7	-1.55	77.6		88.2	743.75	98.9
	1.7	-1.56	77.6		88.5	777.49	98.9
	1.7	-1.56	77.6		88.7	833.35	98.9
	1.7	-1.57	77.6		89.0	800.45	99.1
	1.7	-1.57	77.6		89.2	789.22	99.4
	1.8	-1.57	77.5		89.5	788.62	99.4
	1.8	-1.57	77.5		89.7	788.09	99.5

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	90.0	802.23	99.5		100.2	1064.47	101.3
	90.2	830.00	99.5		100.5	1056.19	101.3
	90.5	880.62	99.6		100.7	1109.47	101.4
	90.7	843.69	99.7		101.0	1119.21	101.5
	91.0	835.46	99.6		101.2	1184.75	101.6
	91.2	834.45	99.6		101.5	1113.14	101.8
	91.5	834.05	99.6		101.7	1111.76	101.8
	91.7	833.87	99.5		102.0	1110.94	101.8
	92.0	852.78	99.5		102.2	1105.24	101.8
	92.2	906.45	99.6		102.5	1127.79	101.9
	92.5	934.38	99.9		102.7	1166.29	101.9
	92.7	880.36	100.1		103.0	1210.00	101.8
	93.0	879.56	100.2		103.2	1154.12	101.7
	93.2	879.00	100.2		103.5	1158.25	101.7
	93.5	854.66	100.3		103.7	1157.36	101.7
	93.7	930.58	100.4		104.0	1156.48	101.7
	94.0	958.35	100.3		104.2	1156.24	101.7
	94.2	927.12	100.5		104.5	1125.80	101.7
	94.5	926.42	100.6		104.7	1206.16	101.8
	94.7	925.59	100.6		105.0	1235.88	101.9
	95.0	925.40	100.7		105.2	1260.15	101.9
	95.2	924.81	100.7		105.5	1205.05	101.8
	95.5	924.68	100.7		105.7	1204.01	101.8
	95.7	958.56	100.8		106.0	1203.28	101.8
	96.0	1027.03	100.7		106.2	1180.86	101.8
	96.2	987.20	100.7		106.5	1254.04	101.8
	96.5	973.03	100.9		106.7	1290.33	101.8
	96.7	972.34	100.9		107.0	1282.52	101.9
	97.0	971.73	101.0		107.2	1251.63	102.2
	97.2	944.06	101.0		107.5	1250.68	102.3
	97.5	1015.69	101.2		107.7	1249.80	102.3
	97.7	1098.43	101.2		108.0	1249.27	102.4
	98.0	1019.99	101.2		108.2	1306.52	102.4
	98.2	1019.05	101.2		108.5	1330.82	102.4
	98.5	1018.51	101.2		108.7	1450.54	102.6
	98.7	1003.77	101.1		109.0	1298.97	102.7
	99.0	1047.23	101.1		109.2	1297.92	102.7
	99.2	1073.05	101.0		109.5	1297.08	102.7
	99.5	1132.81	101.1		109.7	1296.51	102.7
	99.7	1065.97	101.3		110.0	1316.46	102.7
	100.0	1064.99	101.3		110.2	1371.59	102.7

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	110.5	1460.64	102.8		120.7	1648.59	105.7
	110.7	1345.59	102.8		121.0	1666.60	105.7
	111.0	1343.92	102.9		121.2	1679.64	105.8
	111.2	1342.90	102.9		121.5	1621.31	105.9
	111.5	1342.20	103.0		121.7	1619.47	106.0
	111.7	1351.65	103.1		122.0	1618.35	106.0
	112.0	1417.38	103.1		122.2	1582.50	106.0
	112.2	1567.40	103.2		122.5	1702.39	106.1
	112.5	1390.43	103.2		122.7	1713.80	106.2
	112.7	1388.82	103.4		123.0	1727.76	106.3
	113.0	1387.90	103.4		123.2	1667.75	106.5
	113.2	1387.14	103.5		123.5	1665.48	106.6
	113.5	1332.79	103.5		123.7	1664.36	106.7
	113.7	1459.86	103.5		124.0	1612.42	106.7
	114.0	1590.23	103.7		124.2	1741.47	106.8
	114.2	1434.72	103.7		124.5	1782.43	107.0
	114.5	1433.67	103.8		124.7	1737.62	107.2
	114.7	1432.54	103.8		125.0	1713.11	107.4
	115.0	1431.97	103.8		125.2	1711.67	107.5
	115.2	1490.62	103.8		125.5	1710.54	107.5
	115.5	1582.90	104.0		125.7	1709.73	107.5
	115.7	1476.83	104.1		126.0	1768.50	107.6
	116.0	1480.22	104.2		126.2	1806.35	107.6
	116.2	1479.33	104.2		126.5	1842.30	107.6
	116.5	1478.53	104.3		126.7	1760.91	107.7
	116.7	1492.06	104.3		127.0	1759.09	107.9
	117.0	1558.96	104.4		127.2	1758.28	107.9
	117.2	1767.48	104.6		127.5	1757.17	108.0
	117.5	1527.85	104.7		127.7	1829.83	108.0
	117.7	1526.65	104.8		128.0	1875.56	108.1
	118.0	1525.68	104.9		128.2	1859.82	108.2
	118.2	1513.71	104.9		128.5	1807.00	108.4
	118.5	1599.42	104.9		128.7	1805.33	108.4
	118.7	1615.22	105.1		129.0	1804.10	108.5
	119.0	1624.77	105.2		129.2	1804.95	108.5
	119.2	1576.02	105.4		129.5	1905.15	108.6
	119.5	1572.76	105.5		129.7	1999.95	108.6
	119.7	1571.79	105.6		130.0	1856.77	108.7
	120.0	1570.89	105.6		130.2	1853.51	108.9
	120.2	1570.74	105.6		130.5	1852.04	109.0
	120.5	1584.81	105.7		130.7	1850.88	109.0

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	131.0	1943.65	109.1		141.2	2346.08	112.5
	131.2	1996.80	109.1		141.5	2183.54	112.6
	131.5	1876.46	109.2		141.7	2181.61	112.7
	131.7	1900.16	109.4		142.0	2179.81	112.7
	132.0	1898.42	109.5		142.2	2081.24	112.7
	132.2	1897.06	109.5		142.5	2295.14	112.8
	132.5	1972.27	109.6		142.7	2304.87	112.9
	132.7	2055.18	109.6		143.0	2303.55	113.0
	133.0	1967.79	109.6		143.2	2174.63	113.2
	133.2	1947.57	109.8		143.5	2228.89	113.4
	133.5	1945.57	109.9		143.7	2226.93	113.5
	133.7	1944.28	109.9		144.0	2225.11	113.5
	134.0	1995.61	110.0		144.2	2238.60	113.6
	134.2	2091.37	110.0		144.5	2337.07	113.6
	134.5	2041.55	110.0		144.7	2343.14	113.9
	134.7	1995.53	110.3		145.0	2342.21	114.1
	135.0	1993.54	110.4		145.2	2314.63	114.3
	135.2	1992.03	110.5		145.5	2274.97	114.4
	135.5	2071.34	110.6		145.7	2273.25	114.4
	135.7	2150.25	110.6		146.0	2271.39	114.5
	136.0	2102.24	110.7		146.2	2269.92	114.5
	136.2	2042.48	111.0		146.5	2268.61	114.5
	136.5	2040.39	111.1		146.7	2267.46	114.5
	136.7	2038.87	111.1		147.0	2266.41	114.5
	137.0	2108.55	111.2		147.2	2265.55	114.5
	137.2	2193.88	111.3		147.5	2264.74	114.5
	137.5	2140.20	111.5		147.7	2366.87	114.6
	137.7	2089.45	111.6		148.0	2352.58	114.6
	138.0	2087.31	111.7		148.2	2292.32	114.9
	138.2	2085.52	111.7		148.5	2293.22	115.0
	138.5	2084.07	111.8		148.7	2290.35	115.0
	138.7	2089.87	111.8		149.0	2287.85	115.1
	139.0	2208.73	111.9		149.2	2287.93	115.1
	139.2	2409.07	112.0		149.5	2287.34	115.1
	139.5	2138.19	112.1		149.7	2286.15	115.1
	139.7	2135.59	112.2		150.0	2285.08	115.1
	140.0	2133.47	112.2		150.2	2283.72	115.1
	140.2	2131.94	112.2		150.5	2282.51	115.2
	140.5	2140.21	112.3		150.7	2281.18	115.2
	140.7	2240.98	112.3		151.0	2279.78	115.2
	141.0	2278.59	112.4		151.2	2278.97	115.2

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	151.5	2278.54	115.2		161.7	19.64	114.8
	151.7	2278.72	115.2		162.0	19.66	114.8
	152.0	2278.14	115.2		162.2	19.68	114.8
	152.2	2277.48	115.2		162.5	19.70	114.8
	152.5	2277.43	115.2		162.7	19.72	114.8
	152.7	2290.57	115.2		163.0	19.73	114.8
	153.0	2361.95	115.2		163.2	19.75	114.8
	153.2	2375.86	115.2		163.5	19.77	114.8
	153.5	2320.95	115.3		163.7	19.79	114.8
	153.7	2321.00	115.3		164.0	19.81	114.8
	154.0	2329.05	115.3		164.2	19.83	114.8
	154.2	2323.66	115.4		164.5	19.85	114.8
	154.5	2319.23	115.4		164.7	19.88	114.8
	154.7	2326.01	115.4		165.0	19.91	114.8
	155.0	2322.00	115.6		165.2	19.94	114.8
	155.2	17.77	115.0		165.5	19.97	114.8
	155.5	17.97	115.0		165.7	20.00	114.8
	155.7	18.12	115.0		166.0	20.02	114.8
	156.0	18.27	114.9		166.2	20.04	114.8
	156.2	18.38	114.9		166.5	20.08	114.8
	156.5	18.50	114.9		166.7	20.11	114.8
	156.7	18.28	114.9		167.0	20.14	114.8
	157.0	18.71	114.9		167.2	20.20	114.8
	157.2	18.45	114.8		167.5	20.23	114.8
	157.5	18.86	114.8		167.7	20.26	114.8
	157.7	18.61	114.8		168.0	20.29	114.8
	158.0	19.02	114.8		168.2	20.31	114.8
	158.2	18.71	114.8		168.5	20.33	114.8
	158.5	18.76	114.8		168.7	20.35	114.8
	158.7	19.20	114.8		169.0	20.37	114.8
	159.0	19.24	114.8		169.2	20.40	114.8
	159.2	18.96	114.8		169.5	20.44	114.8
	159.5	18.96	114.8		169.7	20.46	114.8
	159.7	19.05	114.8		170.0	20.47	114.8
	160.0	19.04	114.8		170.2	20.49	114.9
	160.2	19.12	114.8		170.5	20.51	114.9
	160.5	19.50	114.8		170.7	20.51	114.9
	160.7	19.53	114.8		171.0	20.53	114.9
	161.0	19.57	114.8		171.2	20.54	114.9
	161.2	19.59	114.8		171.5	20.56	114.9
	161.5	19.62	114.8		171.7	20.58	114.9

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	172.0	20.60	114.9		182.2	21.70	114.9
	172.2	20.62	114.9		182.5	21.84	114.9
	172.5	20.65	114.9		182.7	22.05	114.9
	172.7	20.67	114.9		183.0	22.20	114.9
	173.0	20.69	114.9		183.2	22.39	114.9
	173.2	20.71	114.9		183.5	22.60	114.9
	173.5	20.74	114.9		183.7	22.77	114.9
	173.7	20.76	114.9		184.0	22.99	115.0
	174.0	20.78	114.9		184.2	23.12	115.0
	174.2	20.80	114.9		184.5	23.38	115.0
	174.5	20.82	114.9		184.7	23.53	115.0
	174.7	20.84	114.9		185.0	23.63	115.0
	175.0	20.86	114.9		185.2	23.81	115.0
	175.2	20.88	114.9		185.5	24.02	115.0
	175.5	20.90	114.9		185.7	24.15	115.0
	175.7	20.91	114.9		186.0	24.34	115.0
	176.0	20.92	114.9		186.2	24.55	115.0
	176.2	20.94	114.9		186.5	24.75	115.0
	176.5	20.95	114.9		186.7	24.90	115.0
	176.7	20.97	114.9		187.0	25.14	115.0
	177.0	20.98	114.9		187.2	25.28	115.0
	177.2	20.99	114.9		187.5	25.36	115.0
	177.5	21.01	114.9		187.7	25.52	115.0
	177.7	21.01	114.9		188.0	25.80	115.0
	178.0	21.02	114.9		188.2	26.01	115.0
	178.2	21.03	114.9		188.5	26.18	115.0
	178.5	21.05	114.9		188.7	26.35	115.0
	178.7	21.09	114.9		189.0	26.45	115.0
	179.0	21.15	114.9		189.2	26.68	115.0
	179.2	21.21	114.9		189.5	26.73	115.0
	179.5	21.28	114.9		189.7	26.95	115.0
	179.7	21.36	114.9		190.0	27.07	115.0
	180.0	21.01	114.9		190.2	27.29	115.0
	180.2	21.10	114.9		190.5	27.50	115.0
	180.5	21.09	114.9		190.7	27.61	115.0
	180.7	21.11	114.9		191.0	27.74	115.0
	181.0	20.91	114.9		191.2	27.90	115.0
	181.2	21.05	114.9		191.5	28.08	115.0
	181.5	21.17	114.9		191.7	28.27	115.0
	181.7	21.23	114.9		192.0	28.31	115.0
	182.0	21.52	114.9		192.2	28.65	115.0

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	192.5	28.78	115.0		202.7	36.49	115.1
	192.7	28.90	115.0		203.0	36.59	115.1
	193.0	29.08	115.0		203.2	36.71	115.1
	193.2	29.28	115.0		203.5	36.96	115.1
	193.5	29.36	115.0		203.7	37.16	115.1
	193.7	29.50	115.0		204.0	37.31	115.1
	194.0	29.73	115.0		204.2	37.50	115.1
	194.2	29.89	115.0		204.5	37.64	115.1
	194.5	30.11	115.0		204.7	37.82	115.1
	194.7	30.29	115.0		205.0	37.93	115.1
	195.0	30.36	115.0		205.2	38.12	115.1
	195.2	30.55	115.0		205.5	38.23	115.1
	195.5	30.74	115.0		205.7	38.45	115.1
	195.7	30.89	115.0		206.0	38.52	115.1
	196.0	31.04	115.1		206.2	38.71	115.1
	196.2	31.18	115.1		206.5	38.78	115.1
	196.5	31.34	115.1		206.7	38.94	115.1
	196.7	31.53	115.1		207.0	39.12	115.1
	197.0	31.74	115.1		207.2	39.27	115.1
	197.2	31.88	115.1		207.5	39.43	115.1
	197.5	31.98	115.1		207.7	39.67	115.1
	197.7	32.17	115.1		208.0	39.76	115.1
	198.0	32.21	115.1		208.2	39.89	115.2
	198.2	32.42	115.1		208.5	40.01	115.2
	198.5	32.62	115.1		208.7	40.35	115.2
	198.7	32.81	115.1		209.0	40.33	115.2
	199.0	32.96	115.1		209.2	40.47	115.2
	199.2	33.13	115.1		209.5	40.59	115.2
	199.5	33.28	115.1		209.7	40.82	115.2
	199.7	33.47	115.1		210.0	40.89	115.2
	200.0	33.55	115.1		210.2	41.01	115.2
	200.2	33.81	115.1		210.5	41.16	115.2
	200.5	33.88	115.1		210.7	41.39	115.2
	200.7	34.34	115.1		211.0	41.54	115.2
	201.0	34.43	115.1		211.2	41.66	115.2
	201.2	34.50	115.1		211.5	41.88	115.2
	201.5	34.62	115.1		211.7	42.04	115.2
	201.7	36.02	115.1		212.0	42.16	115.2
	202.0	36.16	115.1		212.2	42.33	115.2
	202.2	36.38	115.1		212.5	42.47	115.2
	202.5	36.26	115.1		212.7	42.50	115.2

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	213.0	42.69	115.2		223.2	48.85	115.3
	213.2	42.89	115.2		223.5	48.99	115.3
	213.5	42.98	115.2		223.7	49.17	115.3
	213.7	43.13	115.2		224.0	49.38	115.3
	214.0	43.24	115.2		224.2	49.48	115.3
	214.2	43.41	115.2		224.5	49.61	115.3
	214.5	43.79	115.2		224.7	49.67	115.3
	214.7	43.85	115.2		225.0	49.87	115.3
	215.0	43.93	115.2		225.2	50.03	115.3
	215.2	43.98	115.2		225.5	50.06	115.3
	215.5	44.07	115.2		225.7	50.29	115.3
	215.7	44.84	115.2		226.0	50.44	115.3
	216.0	45.07	115.2		226.2	50.55	115.3
	216.2	45.28	115.2		226.5	50.67	115.3
	216.5	45.51	115.2		226.7	50.82	115.3
	216.7	45.37	115.2		227.0	50.90	115.3
	217.0	45.50	115.2		227.2	51.12	115.3
	217.2	45.67	115.2		227.5	51.11	115.3
	217.5	45.78	115.2		227.7	51.44	115.3
	217.7	45.86	115.2		228.0	51.55	115.3
	218.0	46.01	115.2		228.2	51.65	115.3
	218.2	46.23	115.2		228.5	51.90	115.3
	218.5	46.32	115.2		228.7	52.19	115.3
	218.7	46.49	115.2		229.0	52.23	115.3
	219.0	46.56	115.2		229.2	52.24	115.3
	219.2	46.69	115.3		229.5	52.55	115.3
	219.5	46.89	115.2		229.7	52.57	115.3
	219.7	46.92	115.3		230.0	52.75	115.3
	220.0	47.20	115.3		230.2	52.79	115.3
	220.2	47.22	115.3		230.5	53.01	115.3
	220.5	47.35	115.3		230.7	53.19	115.4
	220.7	47.45	115.3		231.0	53.30	115.4
	221.0	47.59	115.3		231.2	53.46	115.4
	221.2	47.88	115.3		231.5	53.64	115.4
	221.5	47.99	115.3		231.7	53.73	115.4
	221.7	48.03	115.3		232.0	53.87	115.4
	222.0	48.23	115.3		232.2	54.07	115.4
	222.2	48.32	115.3		232.5	54.23	115.4
	222.5	48.50	115.3		232.7	54.42	115.4
	222.7	48.62	115.3		233.0	54.51	115.4
	223.0	48.77	115.3		233.2	54.53	115.4

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	233.5	54.68	115.4		243.7	60.56	115.5
	233.7	54.82	115.4		244.0	60.67	115.5
	234.0	55.04	115.4		244.2	60.84	115.5
	234.2	55.19	115.4		244.5	60.88	115.5
	234.5	55.25	115.4		244.7	61.37	115.5
	234.7	55.45	115.4		245.0	61.44	115.5
	235.0	55.58	115.4		245.2	61.50	115.5
	235.2	55.70	115.4		245.5	61.61	115.5
	235.5	55.80	115.4		245.7	61.62	115.5
	235.7	56.00	115.4		246.0	24.43	115.5
	236.0	56.10	115.4		246.2	23.37	115.5
	236.2	56.16	115.4		246.5	23.19	115.5
	236.5	56.40	115.4		246.7	23.05	115.5
	236.7	56.58	115.4		247.0	22.99	115.5
	237.0	56.75	115.4		247.2	22.93	115.5
	237.2	56.96	115.4		247.5	22.90	115.5
	237.5	57.05	115.4		247.7	22.94	115.5
	237.7	57.18	115.4		248.0	22.94	115.5
	238.0	57.28	115.4		248.2	22.95	115.5
	238.2	57.46	115.4		248.5	22.95	115.5
	238.5	57.66	115.4		248.7	22.94	115.5
	238.7	57.60	115.4		249.0	22.95	115.5
	239.0	57.71	115.4		249.2	22.95	115.5
	239.2	58.05	115.4		249.5	22.95	115.5
	239.5	58.14	115.4		249.7	22.95	115.5
	239.7	58.29	115.4		250.0	22.94	115.5
	240.0	58.46	115.4		250.2	22.95	115.5
	240.2	58.59	115.4		250.5	22.95	115.5
	240.5	58.72	115.4		250.7	22.95	115.5
	240.7	58.85	115.4		251.0	22.95	115.5
	241.0	58.98	115.4		251.2	22.96	115.5
	241.2	59.13	115.5		251.5	22.96	115.5
	241.5	59.24	115.5		251.7	22.97	115.5
	241.7	59.39	115.5		252.0	22.98	115.5
	242.0	59.53	115.5		252.2	22.98	115.5
	242.2	59.67	115.5		252.5	22.99	115.5
	242.5	59.85	115.5		252.7	22.99	115.5
	242.7	59.97	115.5		253.0	23.00	115.5
	243.0	60.11	115.5		253.2	23.00	115.6
	243.2	60.25	115.5		253.5	23.01	115.6
	243.5	60.39	115.5		253.7	23.01	115.6

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	254.0	23.01	115.6		264.2	23.16	115.7
	254.2	23.02	115.6		264.5	23.16	115.7
	254.5	23.03	115.6		264.7	23.16	115.7
	254.7	23.03	115.6		265.0	23.17	115.7
	255.0	23.04	115.6		265.2	23.18	115.7
	255.2	23.05	115.6		265.5	23.18	115.7
	255.5	23.05	115.6		265.7	23.18	115.7
	255.7	23.06	115.6		266.0	23.19	115.7
	256.0	23.05	115.6		266.2	23.19	115.7
	256.2	23.05	115.6		266.5	23.19	115.7
	256.5	23.05	115.6		266.7	23.20	115.7
	256.7	23.05	115.6		267.0	23.20	115.7
	257.0	23.05	115.6		267.2	23.20	115.7
	257.2	23.05	115.6		267.5	23.19	115.7
	257.5	23.06	115.6		267.7	23.20	115.7
	257.7	23.06	115.6		268.0	23.19	115.7
	258.0	23.06	115.6		268.2	23.18	115.7
	258.2	23.07	115.6		268.5	23.18	115.7
	258.5	23.08	115.6		268.7	23.18	115.7
	258.7	23.07	115.6		269.0	23.18	115.7
	259.0	23.08	115.6		269.2	23.18	115.7
	259.2	23.09	115.6		269.5	23.18	115.7
	259.5	23.11	115.6		269.7	23.18	115.7
	259.7	23.12	115.6		270.0	23.18	115.7
	260.0	23.13	115.6		270.2	23.18	115.7
	260.2	23.14	115.6		270.5	23.19	115.7
	260.5	23.15	115.6		270.7	23.20	115.7
	260.7	23.16	115.6		271.0	23.21	115.7
	261.0	23.16	115.6		271.2	23.21	115.7
	261.2	23.17	115.6		271.5	23.23	115.7
	261.5	23.17	115.6		271.7	23.24	115.7
	261.7	23.17	115.6		272.0	23.25	115.7
	262.0	23.17	115.6		272.2	23.26	115.7
	262.2	23.17	115.6		272.5	23.26	115.7
	262.5	23.17	115.6		272.7	23.27	115.7
	262.7	23.16	115.6		273.0	23.28	115.7
	263.0	23.16	115.6		273.2	23.28	115.7
	263.2	23.17	115.6		273.5	23.29	115.7
	263.5	23.16	115.7		273.7	23.30	115.7
	263.7	23.16	115.7		274.0	23.30	115.7
	264.0	23.16	115.7		274.2	23.30	115.7

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	274.5	23.30	115.8		284.7	23.43	115.8
	274.7	23.30	115.8		285.0	23.43	115.8
	275.0	23.30	115.8		285.2	23.43	115.8
	275.2	23.30	115.8		285.5	23.44	115.8
	275.5	23.30	115.8		285.7	23.44	115.9
	275.7	23.31	115.8		286.0	23.44	115.9
	276.0	23.31	115.8		286.2	23.43	115.9
	276.2	23.31	115.8		286.5	23.44	115.9
	276.5	23.31	115.8		286.7	23.44	115.9
	276.7	23.31	115.8		287.0	23.45	115.9
	277.0	23.32	115.8		287.2	23.45	115.9
	277.2	23.32	115.8		287.5	23.45	115.9
	277.5	23.32	115.8		287.7	23.46	115.9
	277.7	23.33	115.8		288.0	23.46	115.9
	278.0	23.34	115.8		288.2	23.46	115.9
	278.2	23.35	115.8		288.5	23.46	115.9
	278.5	23.35	115.8		288.7	23.46	115.9
	278.7	23.37	115.8		289.0	23.46	115.9
	279.0	23.37	115.8		289.2	23.47	115.9
	279.2	23.36	115.8		289.5	23.48	115.9
	279.5	23.36	115.8		289.7	23.49	115.9
	279.7	23.36	115.8		290.0	23.50	115.9
	280.0	23.36	115.8		290.2	23.50	115.9
	280.2	23.36	115.8		290.5	23.50	115.9
	280.5	23.36	115.8		290.7	23.51	115.9
	280.7	23.36	115.8		291.0	23.51	115.9
	281.0	23.36	115.8		291.2	23.51	115.9
	281.2	23.36	115.8		291.5	23.51	115.9
	281.5	23.37	115.8		291.7	23.52	115.9
	281.7	23.37	115.8		292.0	23.52	115.9
	282.0	23.37	115.8		292.2	23.52	115.9
	282.2	23.37	115.8		292.5	23.53	115.9
	282.5	23.37	115.8		292.7	23.53	115.9
	282.7	23.39	115.8		293.0	23.54	115.9
	283.0	23.39	115.8		293.2	23.54	115.9
	283.2	23.40	115.8		293.5	23.53	115.9
	283.5	23.39	115.8		293.7	23.55	115.9
	283.7	23.40	115.8		294.0	23.55	115.9
	284.0	23.40	115.8		294.2	23.56	115.9
	284.2	23.41	115.8		294.5	23.56	115.9
	284.5	23.43	115.8		294.7	23.56	115.9

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	295.0	23.57	115.9		305.2	23.80	116.0
	295.2	23.56	115.9		305.5	23.84	116.0
	295.5	23.57	115.9		305.7	23.88	116.0
	295.7	23.57	115.9		306.0	23.93	116.0
	296.0	23.57	115.9		306.2	23.98	116.0
	296.2	23.57	115.9		306.5	23.69	116.0
	296.5	23.57	115.9		306.7	23.65	116.0
	296.7	23.57	115.9		307.0	23.77	116.0
	297.0	23.56	115.9		307.2	23.84	116.0
	297.2	23.56	116.0		307.5	23.90	116.0
	297.5	23.56	116.0		307.7	23.93	116.0
	297.7	23.56	116.0		308.0	23.96	116.0
	298.0	23.57	116.0		308.2	24.02	116.0
	298.2	23.58	116.0		308.5	24.16	116.0
	298.5	23.58	116.0		308.7	24.20	116.1
	298.7	23.58	116.0		309.0	24.21	116.1
	299.0	23.59	116.0		309.2	24.30	116.1
	299.2	23.59	116.0		309.5	24.32	116.1
	299.5	23.59	116.0		309.7	24.38	116.1
	299.7	23.60	116.0		310.0	24.43	116.1
	300.0	23.60	116.0		310.2	24.52	116.1
	300.2	23.60	116.0		310.5	24.56	116.1
	300.5	23.61	116.0		310.7	24.65	116.1
	300.7	23.61	116.0		311.0	24.72	116.1
	301.0	23.62	116.0		311.2	24.85	116.1
	301.2	23.62	116.0		311.5	24.85	116.1
	301.5	23.63	116.0		311.7	24.89	116.1
	301.7	23.62	116.0		312.0	24.99	116.1
	302.0	23.62	116.0		312.2	25.03	116.1
	302.2	23.63	116.0		312.5	25.13	116.1
	302.5	23.63	116.0		312.7	25.17	116.1
	302.7	23.63	116.0		313.0	25.24	116.1
	303.0	23.63	116.0		313.2	25.24	116.1
	303.2	23.64	116.0		313.5	25.37	116.1
	303.5	23.65	116.0		313.7	25.45	116.1
	303.7	23.66	116.0		314.0	25.52	116.1
	304.0	23.68	116.0		314.2	25.51	116.1
	304.2	23.69	116.0		314.5	25.66	116.1
	304.5	23.71	116.0		314.7	25.74	116.1
	304.7	23.73	116.0		315.0	25.78	116.1
	305.0	23.76	116.0		315.2	25.88	116.1

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	315.5	25.83	116.1		325.7	28.07	116.2
	315.7	25.99	116.1		326.0	28.18	116.2
	316.0	25.97	116.1		326.2	28.54	116.2
	316.2	26.40	116.1		326.5	28.25	116.2
	316.5	26.14	116.1		326.7	28.63	116.2
	316.7	26.49	116.1		327.0	28.37	116.2
	317.0	26.17	116.1		327.2	28.41	116.2
	317.2	26.25	116.1		327.5	28.45	116.2
	317.5	26.26	116.1		327.7	28.50	116.2
	317.7	26.32	116.1		328.0	28.53	116.2
	318.0	26.41	116.1		328.2	28.59	116.2
	318.2	26.82	116.1		328.5	28.67	116.2
	318.5	26.51	116.1		328.7	29.03	116.2
	318.7	26.53	116.1		329.0	28.73	116.2
	319.0	26.61	116.1		329.2	29.13	116.2
	319.2	26.73	116.1		329.5	28.83	116.2
	319.5	27.08	116.1		329.7	28.83	116.2
	319.7	26.77	116.1		330.0	28.93	116.2
	320.0	26.79	116.1		330.2	29.02	116.2
	320.2	26.88	116.1		330.5	29.06	116.2
	320.5	26.92	116.1		330.7	29.06	116.2
	320.7	27.02	116.1		331.0	29.21	116.2
	321.0	27.40	116.2		331.2	29.18	116.2
	321.2	27.11	116.2		331.5	29.27	116.2
	321.5	27.11	116.2		331.7	29.28	116.2
	321.7	27.24	116.2		332.0	29.36	116.2
	322.0	27.27	116.2		332.2	29.42	116.2
	322.2	27.35	116.2		332.5	29.50	116.2
	322.5	27.31	116.2		332.7	29.54	116.2
	322.7	27.43	116.2		333.0	29.61	116.2
	323.0	27.83	116.2		333.2	30.02	116.2
	323.2	27.56	116.2		333.5	29.72	116.3
	323.5	27.55	116.2		333.7	30.12	116.3
	323.7	27.63	116.2		334.0	30.16	116.3
	324.0	27.66	116.2		334.2	29.90	116.3
	324.2	27.69	116.2		334.5	29.91	116.3
	324.5	27.74	116.2		334.7	30.31	116.3
	324.7	28.22	116.2		335.0	29.99	116.3
	325.0	27.87	116.2		335.2	30.42	116.3
	325.2	28.00	116.2		335.5	30.13	116.3
	325.5	28.01	116.2		335.7	30.18	116.3

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	336.0	30.20	116.3		346.2	32.36	116.4
	336.2	30.32	116.3		346.5	32.47	116.4
	336.5	30.35	116.3		346.7	32.49	116.4
	336.7	30.33	116.3		347.0	32.55	116.4
	337.0	30.47	116.3		347.2	32.57	116.4
	337.2	30.49	116.3		347.5	32.98	116.4
	337.5	30.56	116.3		347.7	32.71	116.4
	337.7	30.54	116.3		348.0	32.70	116.4
	338.0	30.69	116.3		348.2	32.82	116.4
	338.2	30.73	116.3		348.5	32.75	116.4
	338.5	30.77	116.3		348.7	32.90	116.4
	338.7	30.72	116.3		349.0	32.96	116.4
	339.0	30.86	116.3		349.2	32.99	116.4
	339.2	31.27	116.3		349.5	33.09	116.4
	339.5	31.00	116.3		349.7	33.45	116.4
	339.7	31.36	116.3		350.0	33.16	116.4
	340.0	31.07	116.3		350.2	33.24	116.4
	340.2	31.16	116.3		350.5	33.24	116.4
	340.5	31.19	116.3		350.7	33.27	116.4
	340.7	31.57	116.3		351.0	33.37	116.4
	341.0	31.25	116.3		351.2	33.42	116.4
	341.2	31.27	116.3		351.5	33.44	116.4
	341.5	31.72	116.3		351.7	33.53	116.4
	341.7	31.44	116.3		352.0	33.90	116.4
	342.0	31.81	116.3		352.2	33.58	116.4
	342.2	31.54	116.3		352.5	33.69	116.4
	342.5	31.54	116.3		352.7	33.72	116.4
	342.7	31.61	116.3		353.0	34.11	116.4
	343.0	31.69	116.3		353.2	33.81	116.4
	343.2	31.77	116.3		353.5	33.87	116.4
	343.5	32.13	116.3		353.7	33.91	116.4
	343.7	31.78	116.3		354.0	33.95	116.4
	344.0	32.23	116.3		354.2	33.98	116.4
	344.2	31.91	116.3		354.5	34.06	116.4
	344.5	32.04	116.3		354.7	34.15	116.4
	344.7	31.97	116.3		355.0	34.13	116.4
	345.0	32.02	116.3		355.2	34.26	116.4
	345.2	32.14	116.3		355.5	34.31	116.4
	345.5	32.22	116.3		355.7	34.36	116.4
	345.7	32.18	116.3		356.0	34.43	116.4
	346.0	32.67	116.3		356.2	34.47	116.4

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	356.5	34.46	116.4		366.7	36.93	116.5
	356.7	34.52	116.4		367.0	36.98	116.5
	357.0	34.97	116.4		367.2	36.65	116.5
	357.2	35.01	116.4		367.5	36.70	116.5
	357.5	34.74	116.4		367.7	36.79	116.5
	357.7	34.79	116.4		368.0	36.84	116.5
	358.0	34.82	116.4		368.2	36.84	116.5
	358.2	35.20	116.4		368.5	37.28	116.5
	358.5	35.25	116.4		368.7	37.33	116.5
	358.7	35.29	116.4		369.0	36.97	116.5
	359.0	35.34	116.4		369.2	37.09	116.5
	359.2	35.08	116.4		369.5	37.08	116.5
	359.5	35.44	116.4		369.7	37.54	116.5
	359.7	35.49	116.5		370.0	37.57	116.5
	360.0	35.21	116.5		370.2	37.62	116.5
	360.2	35.24	116.5		370.5	37.66	116.5
	360.5	35.28	116.5		370.7	37.38	116.5
	360.7	35.69	116.5		371.0	37.41	116.5
	361.0	35.34	116.5		371.2	37.51	116.5
	361.2	35.46	116.5		371.5	37.56	116.5
	361.5	35.52	116.5		371.7	37.56	116.5
	361.7	35.54	116.5		372.0	37.64	116.5
	362.0	35.61	116.5		372.2	37.72	116.5
	362.2	35.68	116.5		372.5	37.75	116.5
	362.5	35.74	116.5		372.7	37.80	116.5
	362.7	36.10	116.5		373.0	37.83	116.5
	363.0	35.80	116.5		373.2	37.83	116.5
	363.2	35.87	116.5		373.5	37.96	116.6
	363.5	35.92	116.5		373.7	37.93	116.6
	363.7	35.94	116.5		374.0	38.02	116.6
	364.0	36.04	116.5		374.2	38.13	116.6
	364.2	36.06	116.5		374.5	38.16	116.6
	364.5	36.13	116.5		374.7	38.18	116.6
	364.7	36.52	116.5		375.0	38.59	116.6
	365.0	36.22	116.5		375.2	38.31	116.6
	365.2	36.26	116.5		375.5	38.69	116.6
	365.5	36.29	116.5		375.7	38.43	116.6
	365.7	36.41	116.5		376.0	38.78	116.6
	366.0	36.43	116.5		376.2	38.52	116.6
	366.2	36.82	116.5		376.5	38.55	116.6
	366.5	36.54	116.5		376.7	38.62	116.6

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	377.0	38.99	116.6		387.2	40.72	116.6
	377.2	38.72	116.6		387.5	40.80	116.6
	377.5	38.73	116.6		387.7	41.23	116.6
	377.7	38.82	116.6		388.0	40.97	116.7
	378.0	38.80	116.6		388.2	41.00	116.7
	378.2	38.84	116.6		388.5	41.08	116.7
	378.5	38.95	116.6		388.7	41.09	116.7
	378.7	39.00	116.6		389.0	41.48	116.7
	379.0	39.02	116.6		389.2	41.20	116.7
	379.2	39.12	116.6		389.5	41.20	116.7
	379.5	39.13	116.6		389.7	41.22	116.7
	379.7	39.23	116.6		390.0	41.32	116.7
	380.0	39.29	116.6		390.2	41.37	116.7
	380.2	39.41	116.6		390.5	41.46	116.7
	380.5	39.38	116.6		390.7	41.84	116.7
	380.7	39.49	116.6		391.0	41.89	116.7
	381.0	39.53	116.6		391.2	41.95	116.7
	381.2	39.62	116.6		391.5	41.66	116.7
	381.5	39.63	116.6		391.7	41.74	116.7
	381.7	39.63	116.6		392.0	42.11	116.7
	382.0	39.70	116.6		392.2	41.77	116.7
	382.2	39.75	116.6		392.5	42.21	116.7
	382.5	39.85	116.6		392.7	41.84	116.7
	382.7	39.87	116.6		393.0	41.92	116.7
	383.0	39.92	116.6		393.2	41.94	116.7
	383.2	40.05	116.6		393.5	42.09	116.7
	383.5	40.40	116.6		393.7	42.10	116.7
	383.7	40.08	116.6		394.0	42.15	116.7
	384.0	40.14	116.6		394.2	42.30	116.7
	384.2	40.55	116.6		394.5	42.35	116.7
	384.5	40.27	116.6		394.7	42.70	116.7
	384.7	40.31	116.6		395.0	42.75	116.7
	385.0	40.31	116.6		395.2	42.46	116.7
	385.2	40.75	116.6		395.5	42.38	116.7
	385.5	40.80	116.6		395.7	42.56	116.7
	385.7	40.46	116.6		396.0	42.64	116.7
	386.0	40.90	116.6		396.2	42.66	116.7
	386.2	40.94	116.6		396.5	42.72	116.7
	386.5	40.65	116.6		396.7	43.09	116.7
	386.7	41.02	116.6		397.0	43.13	116.7
	387.0	41.07	116.6		397.2	42.85	116.7

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	397.5	43.24	116.7		407.7	44.96	116.8
	397.7	42.95	116.7		408.0	45.01	116.8
	398.0	43.02	116.7		408.2	45.07	116.8
	398.2	43.04	116.7		408.5	45.11	116.8
	398.5	43.11	116.7		408.7	45.17	116.8
	398.7	43.16	116.7		409.0	45.58	116.8
	399.0	43.18	116.7		409.2	45.30	116.8
	399.2	43.25	116.7		409.5	45.33	116.8
	399.5	43.33	116.7		409.7	45.37	116.8
	399.7	43.37	116.7		410.0	45.43	116.8
	400.0	43.33	116.7		410.2	45.45	116.8
	400.2	43.46	116.7		410.5	45.50	116.8
	400.5	43.84	116.7		410.7	45.60	116.8
	400.7	43.55	116.7		411.0	45.65	116.8
	401.0	43.63	116.7		411.2	46.03	116.8
	401.2	43.64	116.7		411.5	46.06	116.8
	401.5	44.03	116.7		411.7	45.80	116.8
	401.7	44.07	116.7		412.0	45.82	116.8
	402.0	43.77	116.7		412.2	46.21	116.8
	402.2	44.17	116.7		412.5	45.93	116.8
	402.5	44.21	116.8		412.7	46.31	116.8
	402.7	43.93	116.8		413.0	46.04	116.8
	403.0	44.32	116.8		413.2	46.07	116.8
	403.2	44.04	116.8		413.5	46.47	116.8
	403.5	44.04	116.8		413.7	46.08	116.8
	403.7	44.14	116.8		414.0	46.25	116.8
	404.0	44.16	116.8		414.2	46.62	116.8
	404.2	44.26	116.8		414.5	46.28	116.8
	404.5	44.26	116.8		414.7	46.34	116.8
	404.7	44.30	116.8		415.0	46.41	116.8
	405.0	44.39	116.8		415.2	46.46	116.8
	405.2	44.43	116.8		415.5	46.89	116.8
	405.5	44.50	116.8		415.7	46.94	116.8
	405.7	44.55	116.8		416.0	46.58	116.8
	406.0	44.94	116.8		416.2	46.70	116.8
	406.2	44.66	116.8		416.5	47.09	116.8
	406.5	44.72	116.8		416.7	47.14	116.8
	406.7	44.77	116.8		417.0	46.81	116.8
	407.0	44.69	116.8		417.2	46.91	116.8
	407.2	44.83	116.8		417.5	46.94	116.8
	407.5	44.91	116.8		417.7	47.03	116.9

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	418.0	47.39	116.8		428.2	2257.46	117.7
	418.2	47.12	116.9		428.5	2195.28	117.8
	418.5	47.16	116.9		428.7	2196.72	118.0
	418.7	47.15	116.9		429.0	2270.03	118.2
	419.0	47.26	116.9		429.2	2284.27	118.2
	419.2	47.35	116.9		429.5	2277.61	118.1
	419.5	47.31	116.9		429.7	2278.77	118.1
	419.7	47.37	116.9		430.0	2272.85	118.0
	420.0	47.81	116.9		430.2	2268.97	118.0
	420.2	47.46	116.9		430.5	2266.11	118.0
	420.5	47.58	116.9		430.7	2263.85	118.0
	420.7	47.62	116.9		431.0	2262.06	118.0
	421.0	47.70	116.9		431.2	2260.49	117.9
	421.2	47.72	116.9		431.5	2259.34	117.9
	421.5	47.78	116.9		431.7	2259.13	117.9
	421.7	48.17	116.9		432.0	2258.88	117.9
	422.0	47.88	116.9		432.2	2258.42	117.9
	422.2	47.88	116.9		432.5	2258.17	117.9
	422.5	48.01	116.9		432.7	2257.84	117.9
	422.7	48.03	116.9		433.0	2257.60	117.9
	423.0	48.13	116.9		433.2	2257.39	117.9
	423.2	48.09	116.9		433.5	2256.87	117.9
	423.5	48.49	116.9		433.7	2256.75	117.9
	423.7	48.51	116.9		434.0	2256.72	117.9
	424.0	48.53	116.9		434.2	2168.68	117.8
	424.2	48.56	116.9		434.5	2120.79	117.7
	424.5	48.59	116.9		434.7	2141.84	117.6
	424.7	48.61	116.9		435.0	2274.30	117.5
	425.0	48.65	116.9		435.2	2266.89	117.4
	425.2	48.68	116.9		435.5	2266.78	117.4
	425.5	48.71	116.9		435.7	2260.89	117.4
	425.7	48.74	116.9		436.0	2255.85	117.4
	426.0	48.70	116.9		436.2	2251.73	117.4
	426.2	48.66	116.9		436.5	2248.46	117.3
	426.5	1277.33	117.3		436.7	2246.04	117.3
	426.7	1239.37	117.3		437.0	2244.31	117.3
	427.0	1218.24	117.3		437.2	2141.96	117.3
	427.2	2204.89	117.8		437.5	2258.33	117.2
	427.5	2272.28	117.6		437.7	2260.07	117.0
	427.7	2270.91	117.7		438.0	2256.19	116.9
	428.0	2268.33	117.7		438.2	2243.21	116.9

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	438.5	2183.28	116.8		448.7	1995.51	110.9
	438.7	2119.99	116.7		449.0	1998.58	110.7
	439.0	2076.08	116.4		449.2	1992.67	110.7
	439.2	2150.03	115.9		449.5	1988.43	110.6
	439.5	2231.76	115.5		449.7	1878.04	110.6
	439.7	2226.80	115.4		450.0	1844.48	110.4
	440.0	2230.72	115.3		450.2	1824.30	110.2
	440.2	2225.35	115.3		450.5	1949.76	109.9
	440.5	2220.93	115.3		450.7	1950.64	109.8
	440.7	2217.46	115.3		451.0	1945.01	109.7
	441.0	2066.23	115.2		451.2	1941.26	109.7
	441.2	2048.87	115.0		451.5	1826.86	109.6
	441.5	2021.60	114.7		451.7	1806.41	109.4
	441.7	2217.51	114.4		452.0	1785.33	109.1
	442.0	2183.72	114.2		452.2	1904.18	109.0
	442.2	2185.67	114.2		452.5	1901.23	108.9
	442.5	2180.18	114.1		452.7	1896.77	108.9
	442.7	2175.65	114.1		453.0	1827.12	108.8
	443.0	2045.99	114.1		453.2	1781.16	108.7
	443.2	2011.19	114.0		453.5	1751.37	108.4
	443.5	1986.35	113.7		453.7	1842.87	108.1
	443.7	2139.58	113.4		454.0	1857.84	107.9
	444.0	2140.58	113.3		454.2	1853.87	107.8
	444.2	2134.81	113.3		454.5	1850.05	107.8
	444.5	2130.04	113.3		454.7	1773.06	107.8
	444.7	1991.34	113.3		455.0	1724.26	107.7
	445.0	1974.28	113.2		455.2	1710.33	107.5
	445.2	1921.12	112.9		455.5	1799.41	107.2
	445.5	2092.57	112.7		455.7	1809.83	107.1
	445.7	2091.59	112.5		456.0	1805.26	107.0
	446.0	2086.04	112.5		456.2	1802.60	107.0
	446.2	2081.57	112.5		456.5	1714.81	106.9
	446.5	1944.81	112.3		456.7	1683.13	106.6
	446.7	1925.83	112.2		457.0	1661.13	106.4
	447.0	1993.18	111.9		457.2	1763.30	106.1
	447.2	2046.50	111.6		457.5	1760.51	106.0
	447.5	2043.13	111.5		457.7	1757.21	105.9
	447.7	2037.58	111.5		458.0	1676.41	105.9
	448.0	1928.88	111.4		458.2	1647.94	105.8
	448.2	1895.93	111.3		458.5	1626.55	105.7
	448.5	1866.72	111.2		458.7	1714.11	105.6

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	459.0	1715.20	105.4		469.2	1341.02	99.7
	459.2	1711.49	105.3		469.5	1316.68	99.5
	459.5	1709.29	105.3		469.7	1390.89	99.3
	459.7	1625.64	105.2		470.0	1389.54	99.2
	460.0	1599.50	104.9		470.2	1387.43	99.2
	460.2	1565.71	104.6		470.5	1328.65	99.1
	460.5	1669.81	104.4		470.7	1299.08	99.1
	460.7	1666.29	104.3		471.0	1285.51	99.0
	461.0	1663.84	104.2		471.2	1348.24	98.8
	461.2	1576.86	104.0		471.5	1345.21	98.6
	461.5	1552.57	103.8		471.7	1342.96	98.5
	461.7	1671.68	103.6		472.0	1341.58	98.5
	462.0	1623.65	103.4		472.2	1340.76	98.5
	462.2	1619.99	103.3		472.5	1340.21	98.5
	462.5	1617.76	103.3		472.7	1264.04	98.4
	462.7	1564.41	103.2		473.0	1259.75	98.4
	463.0	1528.72	103.1		473.2	1236.86	98.3
	463.2	1500.42	102.9		473.5	1299.86	98.0
	463.5	1559.24	102.6		473.7	1298.79	97.9
	463.7	1575.48	102.4		474.0	1297.20	97.8
	464.0	1572.34	102.3		474.2	1235.73	97.8
	464.2	1515.72	102.3		474.5	1213.73	97.7
	464.5	1483.87	102.2		474.7	1196.22	97.5
	464.7	1451.18	102.0		475.0	1253.19	97.3
	465.0	1525.64	101.8		475.2	1251.59	97.2
	465.2	1529.60	101.7		475.5	1250.14	97.2
	465.5	1526.24	101.6		475.7	1178.86	97.2
	465.7	1481.61	101.5		476.0	1171.81	97.0
	466.0	1443.23	101.4		476.2	1147.08	96.9
	466.2	1403.08	101.2		476.5	1205.81	96.7
	466.5	1501.82	101.0		476.7	1205.05	96.5
	466.7	1482.53	100.7		477.0	1203.57	96.5
	467.0	1479.42	100.7		477.2	1151.07	96.4
	467.2	1427.34	100.6		477.5	1124.59	96.4
	467.5	1397.33	100.6		477.7	1107.51	96.3
	467.7	1364.59	100.4		478.0	1161.23	96.1
	468.0	1424.08	100.1		478.2	1159.23	96.0
	468.2	1435.80	99.9		478.5	1157.96	96.0
	468.5	1433.15	99.8		478.7	1118.21	96.0
	468.7	1431.66	99.8		479.0	1091.06	95.9
	469.0	1353.06	99.8		479.2	1068.99	95.8

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	479.5	1107.72	95.6		489.7	724.10	90.6
	479.7	1112.69	95.4		490.0	669.39	90.4
	480.0	1111.27	95.4		490.2	743.51	90.1
	480.2	1070.96	95.4		490.5	743.19	90.0
	480.5	1053.46	95.3		490.7	742.95	89.9
	480.7	1035.29	95.2		491.0	738.04	89.9
	481.0	1058.41	95.0		491.2	709.26	89.8
	481.2	1067.01	94.9		491.5	648.26	89.7
	481.5	1065.81	94.8		491.7	698.67	89.4
	481.7	1065.19	94.8		492.0	698.52	89.3
	482.0	953.70	94.7		492.2	698.31	89.2
	482.2	990.42	94.6		492.5	631.21	89.2
	482.5	1019.51	94.3		492.7	608.09	89.1
	482.7	1019.34	94.1		493.0	652.48	88.8
	483.0	1018.65	94.0		493.2	652.67	88.7
	483.2	958.76	94.0		493.5	652.16	88.7
	483.5	887.27	93.9		493.7	652.06	88.7
	483.7	972.99	93.6		494.0	565.19	88.6
	484.0	972.77	93.4		494.2	621.38	88.6
	484.2	972.25	93.4		494.5	605.61	88.3
	484.5	922.49	93.4		494.7	605.36	88.2
	484.7	851.63	93.2		495.0	605.21	88.2
	485.0	927.69	92.9		495.2	532.68	88.1
	485.2	926.58	92.8		495.5	549.48	88.1
	485.5	925.86	92.8		495.7	560.05	87.9
	485.7	884.44	92.7		496.0	560.06	87.8
	486.0	791.56	92.6		496.2	560.01	87.8
	486.2	879.78	92.3		496.5	498.68	87.8
	486.5	879.73	92.2		496.7	486.31	87.8
	486.7	878.95	92.1		497.0	514.20	87.7
	487.0	878.82	92.1		497.2	514.11	87.6
	487.2	754.60	92.0		497.5	513.94	87.6
	487.5	829.03	91.8		497.7	494.06	87.6
	487.7	835.53	91.7		498.0	395.46	87.5
	488.0	834.48	91.6		498.2	469.41	87.6
	488.2	834.29	91.6		498.5	468.14	87.5
	488.5	754.56	91.5		498.7	468.05	87.5
	488.7	771.08	91.4		499.0	448.55	87.5
	489.0	789.00	90.9		499.2	373.27	87.5
	489.2	788.61	90.8		499.5	422.39	87.6
	489.5	788.47	90.7		499.7	421.99	87.6

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	500.0	421.90	87.6		510.2	191.65	89.4
	500.2	421.90	87.6		510.5	191.69	89.4
	500.5	370.15	87.6		510.7	191.69	89.4
	500.7	337.69	87.6		511.0	164.65	89.4
	501.0	376.24	87.7		511.2	134.61	89.4
	501.2	376.22	87.8		511.5	124.05	89.6
	501.5	376.06	87.8		511.7	144.10	89.7
	501.7	358.09	87.8		512.0	145.51	89.8
	502.0	278.98	87.7		512.2	145.84	89.8
	502.2	326.56	87.9		512.5	145.94	89.8
	502.5	330.54	88.0		512.7	146.03	89.8
	502.7	330.51	88.0		513.0	146.07	89.8
	503.0	330.53	88.0		513.2	146.11	89.8
	503.2	257.84	88.0		513.5	146.16	89.8
	503.5	285.66	88.2		513.7	146.16	89.8
	503.7	284.01	88.3		514.0	146.21	89.8
	504.0	283.97	88.4		514.2	128.07	89.8
	504.2	284.01	88.4		514.5	104.82	89.9
	504.5	250.16	88.4		514.7	77.41	89.9
	504.7	226.43	88.5		515.0	96.07	90.1
	505.0	241.12	88.7		515.2	100.67	90.2
	505.2	237.92	88.8		515.5	101.03	90.2
	505.5	238.02	88.9		515.7	101.11	90.3
	505.7	238.09	88.9		516.0	101.17	90.3
	506.0	238.12	88.9		516.2	101.25	90.3
	506.2	238.05	88.9		516.5	101.31	90.3
	506.5	237.99	88.9		516.7	101.35	90.3
	506.7	172.70	88.9		517.0	101.47	90.3
	507.0	173.89	89.0		517.2	101.54	90.3
	507.2	191.10	89.2		517.5	90.21	90.3
	507.5	191.24	89.3		517.7	69.92	90.3
	507.7	191.44	89.3		518.0	50.67	90.5
	508.0	191.55	89.4		518.2	51.36	90.9
	508.2	191.62	89.4		518.5	56.13	91.3
	508.5	191.62	89.4		518.7	56.21	91.4
	508.7	191.63	89.4		519.0	56.22	91.5
	509.0	191.63	89.4		519.2	56.23	91.5
	509.2	191.64	89.4		519.5	56.25	91.5
	509.5	191.64	89.4		519.7	56.28	91.5
	509.7	191.64	89.4		520.0	56.29	91.5
	510.0	191.65	89.4		520.2	56.30	91.5

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	520.5	56.31	91.5		530.7	-2.01	91.2
	520.7	56.30	91.5		531.0	-2.02	91.2
	521.0	56.28	91.5		531.2	-2.01	91.2
	521.2	56.26	91.5		531.5	-2.01	91.2
	521.5	56.24	91.5		531.7	-2.01	91.2
	521.7	56.23	91.5		532.0	-2.02	91.2
	522.0	56.21	91.5		532.2	-2.01	91.2
	522.2	56.19	91.5		532.5	-2.01	91.2
	522.5	56.17	91.5		532.7	-2.01	91.2
	522.7	56.14	91.5		533.0	-2.00	91.2
	523.0	56.13	91.5		533.2	-2.01	91.2
	523.2	56.12	91.5		533.5	-2.01	91.2
	523.5	56.12	91.5		533.7	-2.01	91.2
	523.7	56.10	91.5		534.0	-2.01	91.2
	524.0	56.10	91.5		534.2	-2.00	91.2
	524.2	56.08	91.5		534.5	-2.00	91.3
	524.5	56.08	91.5		534.7	-2.00	91.3
	524.7	56.07	91.5		535.0	-2.00	91.3
	525.0	56.06	91.5		535.2	-2.00	91.3
	525.2	56.03	91.5		535.5	-2.00	91.3
	525.5	56.02	91.5		535.7	-2.00	91.3
	525.7	56.03	91.5		536.0	-2.00	91.3
	526.0	56.02	91.5		536.2	-2.00	91.3
	526.2	47.67	91.5		536.5	-1.99	91.3
	526.5	15.96	91.4		536.7	-1.99	91.3
	526.7	-2.02	91.4		537.0	-1.99	91.3
	527.0	-1.96	91.3		537.2	-1.99	91.3
	527.2	-1.94	91.2		537.5	-1.99	91.3
	527.5	-1.98	91.2		537.7	-2.00	91.3
	527.7	-1.98	91.2		538.0	-2.00	91.3
	528.0	-1.98	91.2		538.2	-2.01	91.3
	528.2	-2.00	91.2		538.5	-2.01	91.3
	528.5	-1.99	91.2		538.7	-2.00	91.3
	528.7	-1.99	91.2		539.0	-2.01	91.3
	529.0	-2.00	91.2		539.2	-2.00	91.3
	529.2	-2.00	91.2		539.5	-2.01	91.3
	529.5	-2.02	91.2		539.7	-2.01	91.3
	529.7	-2.02	91.2		540.0	-2.01	91.3
	530.0	-2.02	91.2		540.2	-2.02	91.3
	530.2	-2.02	91.2		540.5	-2.01	91.3
	530.5	-2.01	91.2		540.7	-2.00	91.2

Printing every 1 samples


Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	541.0	-2.01	91.3		551.2	-2.01	91.1
	541.2	-2.01	91.2		551.5	-2.01	91.1
	541.5	-2.01	91.2		551.7	-2.01	91.1
	541.7	-2.01	91.2		552.0	-2.01	91.1
	542.0	-2.00	91.2		552.2	-2.00	91.1
	542.2	-2.00	91.2		552.5	-2.01	91.1
	542.5	-1.99	91.2		552.7	-2.02	91.1
	542.7	-1.99	91.2		553.0	-2.03	91.1
	543.0	-1.99	91.2		553.2	-2.03	91.1
	543.2	-2.00	91.2		553.5	-2.02	91.1
	543.5	-2.00	91.2		553.7	-2.02	91.0
	543.7	-2.00	91.2		554.0	-2.02	91.0
	544.0	-2.00	91.2		554.2	-2.02	91.0
	544.2	-2.00	91.2		554.5	-2.03	91.0
	544.5	-2.00	91.2		554.7	-2.03	91.0
	544.7	-2.00	91.2		555.0	-2.02	91.0
	545.0	-2.00	91.2		555.2	-2.01	91.0
	545.2	-2.00	91.2		555.5	-2.01	91.0
	545.5	-2.01	91.2		555.7	-2.01	91.0
	545.7	-2.02	91.2		556.0	-2.00	91.0
	546.0	-2.02	91.2		556.2	-2.00	91.0
	546.2	-2.02	91.2		556.5	-2.00	91.0
	546.5	-2.02	91.2		556.7	-2.00	91.0
	546.7	-2.02	91.2		557.0	-2.00	91.0
	547.0	-2.02	91.2		557.2	-2.02	90.9
	547.2	-2.01	91.2		557.5	-2.01	90.9
	547.5	-2.01	91.2		557.7	-1.99	90.7
	547.7	-2.02	91.2		558.0	-1.99	90.4
	548.0	-2.02	91.2		558.2	-2.00	90.2
	548.2	-2.02	91.2		558.5	-2.01	90.0
	548.5	-2.02	91.1		558.7	-2.03	89.9
	548.7	-2.02	91.1		559.0	-2.05	89.7
	549.0	-2.01	91.1		559.2	-2.07	89.5
	549.2	-2.00	91.1		559.5	-2.09	89.2
	549.5	-2.00	91.1		559.7	-2.11	88.9
	549.7	-1.99	91.1		560.0	-2.12	88.5
	550.0	-2.00	91.1		560.2	-2.15	88.0
	550.2	-2.00	91.1		560.5	-2.15	86.6
	550.5	-2.00	91.1		560.7	-2.14	86.0
	550.7	-2.00	91.1		561.0	-1.85	86.4
	551.0	-2.01	91.1		561.2	-2.19	87.3

Printing every 1 samples

Serial # 8351 Inside				Serial # 8351 Inside			
Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)	Comments	Time (Min.)	Pressure (psig)	Temp. (deg F)
	561.5	-2.19	88.4		571.7	-2.04	103.8
	561.7	-2.19	89.5		572.0	-2.04	104.0
	562.0	-2.19	90.5		572.2	-2.04	104.2
	562.2	-2.18	91.5		572.5	-2.04	104.2
	562.5	-2.16	92.5		572.7	-2.02	104.2
	562.7	-2.16	93.5		573.0	-2.00	104.3
	563.0	-2.15	94.4		573.2	-2.09	104.6
	563.2	-2.13	95.3		573.5	-2.08	104.6
	563.5	-2.12	96.0		573.7	-1.94	104.1
	563.7	-2.10	96.6		574.0	-1.98	103.9
	564.0	-2.09	97.1		574.2	-1.97	104.0
	564.2	-2.08	97.6		574.5	-2.05	104.2
	564.5	-2.07	98.1		574.7	-2.04	104.3
	564.7	-2.05	98.5		575.0	-2.17	104.5
	565.0	-2.05	99.0		575.2	-2.07	104.8
	565.2	-2.04	99.4		575.5	-2.07	105.1
	565.5	-2.04	99.8		575.7	-2.16	104.8
	565.7	-2.03	100.2				
	566.0	-2.02	100.5				
	566.2	-2.01	100.7				
	566.5	-2.00	101.1				
	566.7	-2.00	101.5				
	567.0	-1.99	101.7				
	567.2	-2.00	101.9				
	567.5	-1.99	102.2				
	567.7	-1.99	102.4				
	568.0	-2.00	102.5				
	568.2	-2.00	102.6				
	568.5	-2.01	102.8				
	568.7	-2.01	102.8				
	569.0	-2.02	102.9				
	569.2	-2.02	103.0				
	569.5	-2.02	103.0				
	569.7	-2.02	103.0				
	570.0	-2.03	103.0				
	570.2	-2.04	103.0				
	570.5	-2.03	103.1				
	570.7	-2.03	103.2				
	571.0	-2.03	103.3				
	571.2	-2.03	103.4				
	571.5	-2.03	103.6				

Printing every 1 samples

### Horner Plot

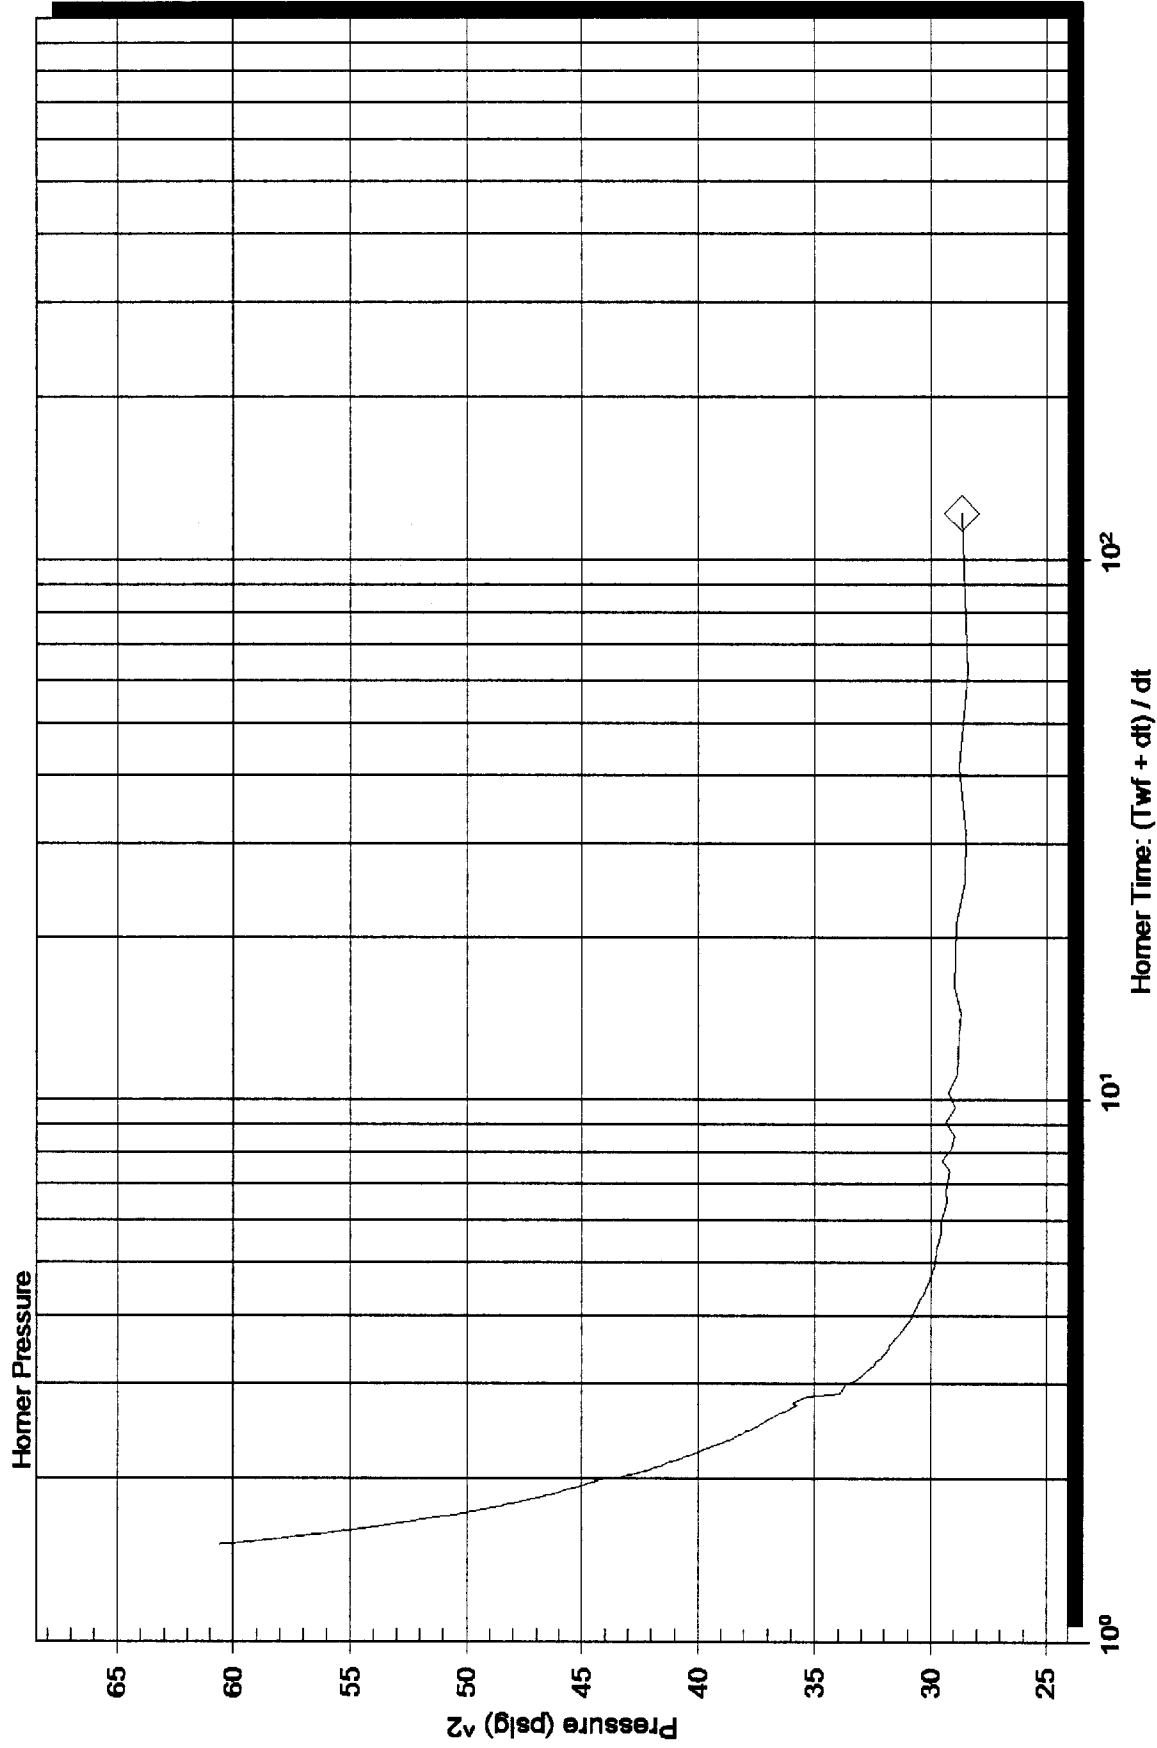

### Horner Plot

