
DX 78-1 Barton KANSAS

Section 9 Township 20 Range 13W

Well No. #1 Hart

Company Schermerhorn-Thunderbird

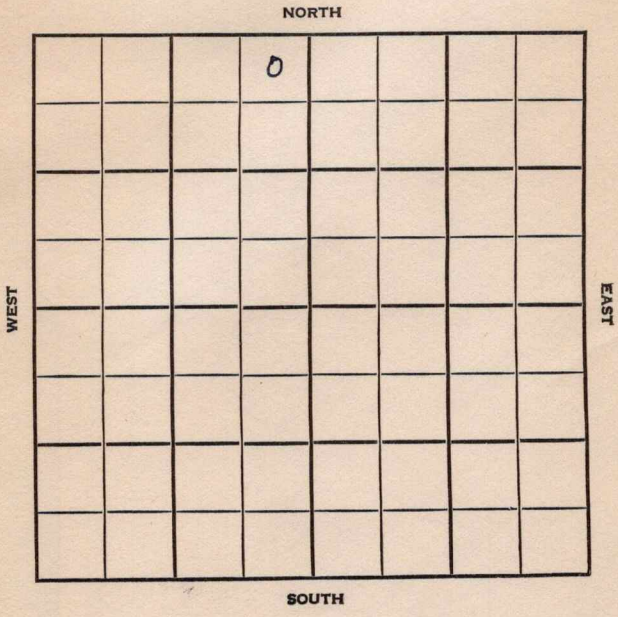

Barton KANSAS

SEC.	TWP.	R.
9	20	13W

WELL NO.

1 Hart FARM

COMPANY

Schermerhorn-Thunderbird

CONTRACTOR

Thunderbird


Wildcat

330 Ft. from N. Line

Ft. from S. Line

330 Ft. from E. Line

Ft. from W. Line

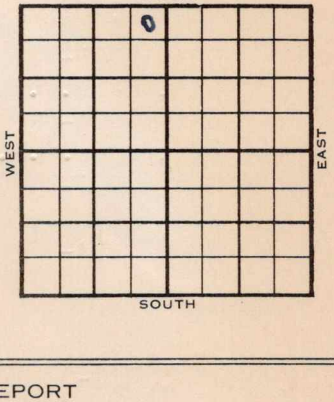

NE NE NW

Atlantic support

	ELEVATION 1863' REPORT
1954	
11/10	Spud 11-8-54 8" @ 250', WOC
1955 1/26	Spud 11-8-54 Oil Well TD 3542' 8" @ 250' Heeb 3064', Br. Lime 3171' Lans 3192' DST 3182'-3210' opn 1 hr, gas in 13 min rec 75' gcm 100,000 cfg. 1100# DST 3216'-41' opn 1 hr, gas in 17 min rec 60' ho & gcm , 360' mo, 970# DST 3255'-68' opn 1 hr, rec 2220' gas, 30' hocm, 70' froggy oil, 1140# DST 3272'-84' opn ½ hr, rec 10' Mud, 720# DST 3314'-26' opn 1 hr, gas in 7 min, F/ oil in 32 min, 1100# DST 3330'-61' opn 1 hr, rec 90' froggy oil, 1100# DST 3365'-84' opn ½ hr, rec 10' Mud 0# DST 3383'-3401' opn 1 hr, rec 3210' gas, 120' ho & gcm 360# Arb. 3439' DST 3441'-45' opn ½ hr, rec 15' Mud0# DST 3442'-52' opn ½ hr, rec 55' Mud 950# OVER

DX-78

1955 745992

Information brought forward.

1/26 DST 3448'-55' opn 1 hr, rec 45' Mud 500#
DST 3453'-60' opn 1 hr, gas in 25 min rec 20' gcm, 1050#
DST 3458'-61' opn 1 hr, gas in 25 min rec 25' gcm 1050#
DST 3463'-70' opn 1 hr, gas in 7 min rec 35' gcm 1025#
DST 3477'-87' opn 1 hr, gas in 5 min 517,000 c.f.g 30' Mud. 1025#
DST 3487'-97' opn ½ hr, gas in 4 min 400,000 c.f.g. 35' Mud, 1060#
DST 3497'-3507' opn 1 hr, gas in 17 min rec 30' Mud, 1080#
DST 3507'-32' opn 1 hr, rec 200' gas, 90' socm, 280#
TD 3542'
5" @ 3542'
48/ 3317-25 F/ to pits in 55 min, F/ 45 to 55 boph
Comp F/ 190 bopd.

COMPLETED

FORM 275 FOR SALE BY KANSAS BLUE PRINT CO.


County Barton State Kansas

Sec. 9 (Blk. Twp.) 20 (Sur. Rge.) 13W Map No.

Operator Schermerhorn-Thunderbird

Well No. 1 Farm Hart

Elev. Location NE NE NW



330 Ft. From N Line NW

330 Ft. From E Line Quarter

1st. Report NOV 10 1954

Completion

Remarks Atlantic - support
Thunderbird - Contr.

Spudding Date 11-8-54

Drlg. Data Wildcat

8" @ 250 WOC

FABEN GILSTRAP

FORM 275 FOR SALE BY KANSAS BLUE PRINT CO

County Barton State Kansas

Sec. 9 (Blk. Twp.) 20 (Sur. Rge.) 13W Map No.

Operator Schermerhorn-Thunderbird

Well No. 1 Farm Hart

Elev. 1863 Location NE NE NW



330 Ft. From N Line NW

330 Ft. From E Line Quarter

1st. Report

Completion JAN 6 1955

Remarks S. Bend Pool
Thunderbird - Contr.

Spudding Date 11-8-54

Drlg. Data Oil well TD 3542

8" @ 250 Heeb. 3064 Br. lime 3171 Lans. 3192 DST 3182-3210 open 1 hr. gas in 13 min. Rec. 75' gcm 100,000 cfg 1100# DST 3216-41 open 1 hr. gas in 17 min. Rec. 60' ho & tcm 360' mo 970# DST 3255-68 open 1 hr. Rec. 2220' gas 30' hocm 70' froggy oil 1140# DST 3272-84 open ½ hr. Rec. 10' mud 720# DST 3314-26 open 1 hr. gas in 7 min. W/ oil in 32 min. 1100# DST 3330-61 open 1 hr. Rec. 90' froggy oil 1100# DST 3365-84 open ½ hr. Rec. 10' mud 0# DST 3383-3401 open 1 hr. Rec. 3210' gas 120' ho & gcm 360# Arb. 3439 DST 3441-

FABEN GILSTRAP

Drlg. Data

45 open ½ hr. Rec. 15' mud 0#
DST 3442-52 open ½ hr. Rec. 55' mud 950#
DST 3448-55 open 1 hr. Rec. 45' mud
500# DST 3453-60 open 1 hr. gas in 25 mi
Rec. 20' gcm 1050# DST 3458-61 open 1 hr
gas in 25 min. Rec. 25' gcm 1050#
DST 3463-70 open 1 hr. gas in 7 min.
Rec. 35' gcm 1025# DST 3477-87 open 1 hr
gas in 5 min. 517,000 cfg 30' mud 1025#
DST 3487-97 open ½ hr. gas in 4 min.
400,000 cfg 35' mud 1060# DST 3497-3507
open 1 hr. gas in 17 min. Rec. 30' mud
1080# DST 3507-32 open 1 hr. Rec.
200' gas 90' socm 280# TD 3542
5" @ 3542 48/ 3317-25 F/ to pits in 55 min
F/ 45 to 55 boph Comp. F/ 190 bopd

26554