


KANSAS

Pawnee

Section 8 Township 20 Range 16W

Well No. 1 Rutherford

Company Brack & Huber

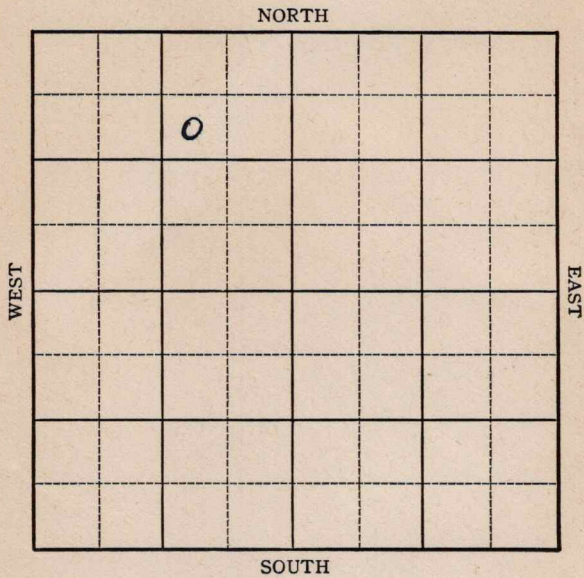

KANSAS

Pawnee County

Hot File

Sec. 8 Twp. 20 R. 16W

Well No. #1 Rutherford Farm

Brack & Huber Company

Wildcat

990 Ft. from N. Line


Ft. from S. Line

990 Ft. from E. Line

Ft. from W. Line

SW NE NW

El DF 2084 Gr. 2081



1946 **El v. 2084** REPORT

6/5	Location	
6/12	Surface Hole	
6/18	Anhy 1085 8" @ 1119' Drlg 2940'	
6/25	Topeka 3160 Lans 3502 Drlg 3788'	
7/1	Arbuckle 3815' Total Depth 3823' 5" set 3815' Drilled plug Filled up with 1200' oil in 1 hour. Filled up with 2400' oil in 6 hours. Swabbed down to 1600' Filled back up to 2100' in $\frac{1}{2}$ hour.	<i>Bldy Zings to test</i>
7/9	" "	(Tel)
7/12	Building tanks Have never tested this well The Hole stands full oil. This should make a nice well since the hole filled up 2100' oil in 30 mins.	(Tel)
7/15	Setting pumping unit & Building tanks.	(Telegram)

OVER

1946

751779

7/23 Pumped 240 bbls. oil - no time.
Pumped 185 bbls. oil in 8 hours.
No water
Do not know if they will acidize
or not.
Looks like a good well. (Tel)

8/7 Arb. 3815
5" @ 3815'
TD 3823
Pump 128 Pot.
No wtr.
Grav. 41.4

COMPLETED

KANSASKansas Pool Name WildcatMap No. 8 Sec. 8 Twp. 20 R. 16WWell No. 1 RutherfordBrack & Huber

Company

FIRST REPORT

Contractor

SW NE NW

SECTION PLAT990 Ft. from N. Line Ft. from S. Line990 Ft. from E. Line Ft. from W. Line

	0		

Pawnee CountyLocation XRig up

Drilling and Remarks:

RECORDCased in., ft.Sand Gas Oil Total Depth **PRODUCTION**1st 24 hrs. Nat. 1st 24 hrs. after shot Gas Cu. Ft.Dry Hole Abandoned

Date

JUN 5 194619Scout

Kansas Pool Name RutherfordKANSAS
Map No. 81 Sec. 8 Twp. 20 R. 16WWell No. 1 RutherfordBrack & Huber

Company


COMPLETED

Contractor

SW NE NW

E 12084

SECTION PLAT

990 Ft. from N. Line

Ft. from S. Line

990 Ft. from E. Line

Ft. from W. Line

Pawnee County

Location

Rig up

Drilling and Remarks:

CR 438155" @ 3815Prod 128 P. XNo Water4 1/2 in

RECORD

Cased _____ in., _____ ft.

Sand _____

Gas _____

Oil _____

Total Depth 3823

PRODUCTION

1st 24 hrs. Nat. _____

1st 24 hrs. after shot _____

Gas _____ Cu. Ft.

Dry Hole _____

Abandoned _____

Date

AUG 7 1946

19

S. J. LEWIS

Scout