

Mid-Continent Petroleum Corporation
G. P. Smith Well #2
SE Sec. 13-20-16W
Pawnee County, Kansas
Commenced: 6-5-48
Completed: 7-8-48
Initial Production: 150 B.P.D.

Casing: 8 5/8" 1100'
5 1/2" 3844' 6" W/475 Sax
W/125 Sax


Formation	Top	Bottom
Surface Soil	0	15
Lime Stone	15	30
Clay	30	40
Shale	40	105
Sand	105	135
Shale	135	255
Sand	255	275
Shale & shells	275	395
Shale	395	462
Sand & shale	462	590
Sand (Dakota)	590	625
Lime & Red Rock	625	710
Red Bed & shale	710	960
Red Rock & sand	960	1010
Red Rock & shells	1010	1098
Lime (Anhy)	1098	1135
Red Bed & Shale	1135	1550
Salt & shale	1550	1675
Shale & shells	1675	1895
Lime & Shale	1895	1985
Broken Lime	1985	2180
Shale & sand	2180	2210
Broken Lime	2210	2230
Sandy Lime	2230	2275
Lime & shale	2275	3150
Lime	3150	3260
Lime & shale	3260	3310
Lime	3310	3455
Lime & shale	3455	3490
Lime	3490	3500
Lime (KC Lansing)	3500	3704
Lime & shale	3704	3725
Conglomerate	3725	3768
Lime (Arbuckle)	3768	3851

Plugged Back to 3844' T.D.

LOCATION NOTICE

TULSA, OKLA., June 1,, 1948WELL NO. 2 ON G. P. Smith FARM

WILL BE AS FOLLOWS:

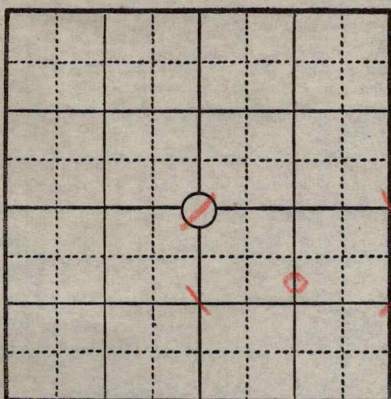

..... FEET FROM NORTH LINE
1320 FEET FROM EAST LINE
330 FEET FROM SOUTH LINE
..... FEET FROM WEST LINE

IN N/2 SE/4 SEC. 13 TWP. 20S RANGE 16W
Pawnee COUNTY, STATE OF Kansas

REMARKS: Lloyd Snyder - Dist. Supt.A. E. Johnson - ForemanSIGNED A. E. Pierce

COPIES TO

MR. ~~KOONTZ~~ McDowell

DISTRICT SUPT.

ACCOUNTING DEPT.

✓ SCOUTING DEPT.

GEOLOGICAL DEPT.

PIPE LINE DEPT.

MATERIALS DEPT.

RENTAL DEPT.

LEGAL DEPT.

TAX DEPT.

ENGINEERING DEPT.

LEASE INVENTORY

CLAIM DEPT.

FILE

Card
J. S. M.
Mapped E.O.D.

DRILLING WELL COMPLETION REPORT

Well No. 2 Farm Name G. P. Smith

Date completed July 8, 1948

Description N2 SE4 Sec. 13-20S-16 W

County Pawnee, State Kansas

Initial production 150 bbls. Total depth 3850 feet

Initial volume _____ cu. ft. _____ lbs. rock pressure

Pipe Line Company _____

Gas Company _____

Remarks: _____

A. E. Pierce

W

Mr. Koontz
Accounting Dept. 3
✓ Scouting Dept.
Geological Dept.
Pipe Line Dept.
Materials Dept.
Rental Dept.
Legal Dept.
Mr. Leo Meyer
Engineering Dept.
Lease Inventory
Mr. Leo Austin
File