Eastern Formation Testing

No. _____

Lease Grove Well No. 1	Date 7/2/74
County Harvey Sec. 27 Twp. 23 Rng. 1W	Elevation
Company Little George Oil Company	Test No. 1
Contractor Red Tiger Drilling Company	Zone Tested Viola
Charge To Little George Oil Company	
Approved By Glen C. Thrasher	Tester Vernon Williams

Recorder No. 1760 Clock Range 12hr. Recorder No. 2836 Clock Range 12hr.

Depth 3546 Depth 3670

Initial Hydro Mud Press. 1763 P.S.I.

Initial Flow Press. 85 To 694 P.S.I. Initial Flow Period 30 Min.

Initial Shut-in Press. 1316 P.S.I. Initial Shut-in 30 Min.

Final Flow Press. 720 To 962 P.S.I. Final Flow Period 30 Min.

Final Shut-in Press. 1316 P.S.I. Final Shut-in 30 Min.

Final Hydro Mud Press. 1763 P.S.I.

Temperature 106

Mud Weight 9.7 Viscosity 40

Fluid Loss 13.2

Interval Tested 3540 To 3556

Top Packer Depth 3540 Surface Choke Size 1"

Bottom Packer Depth 3556 Bottom Choke Size 5/8"

Total Depth 3674 Main Hole Size 7 7/8"

Drill Pipe Size 4½ x h Wt 16.60 Rubber Size 6 3/4"

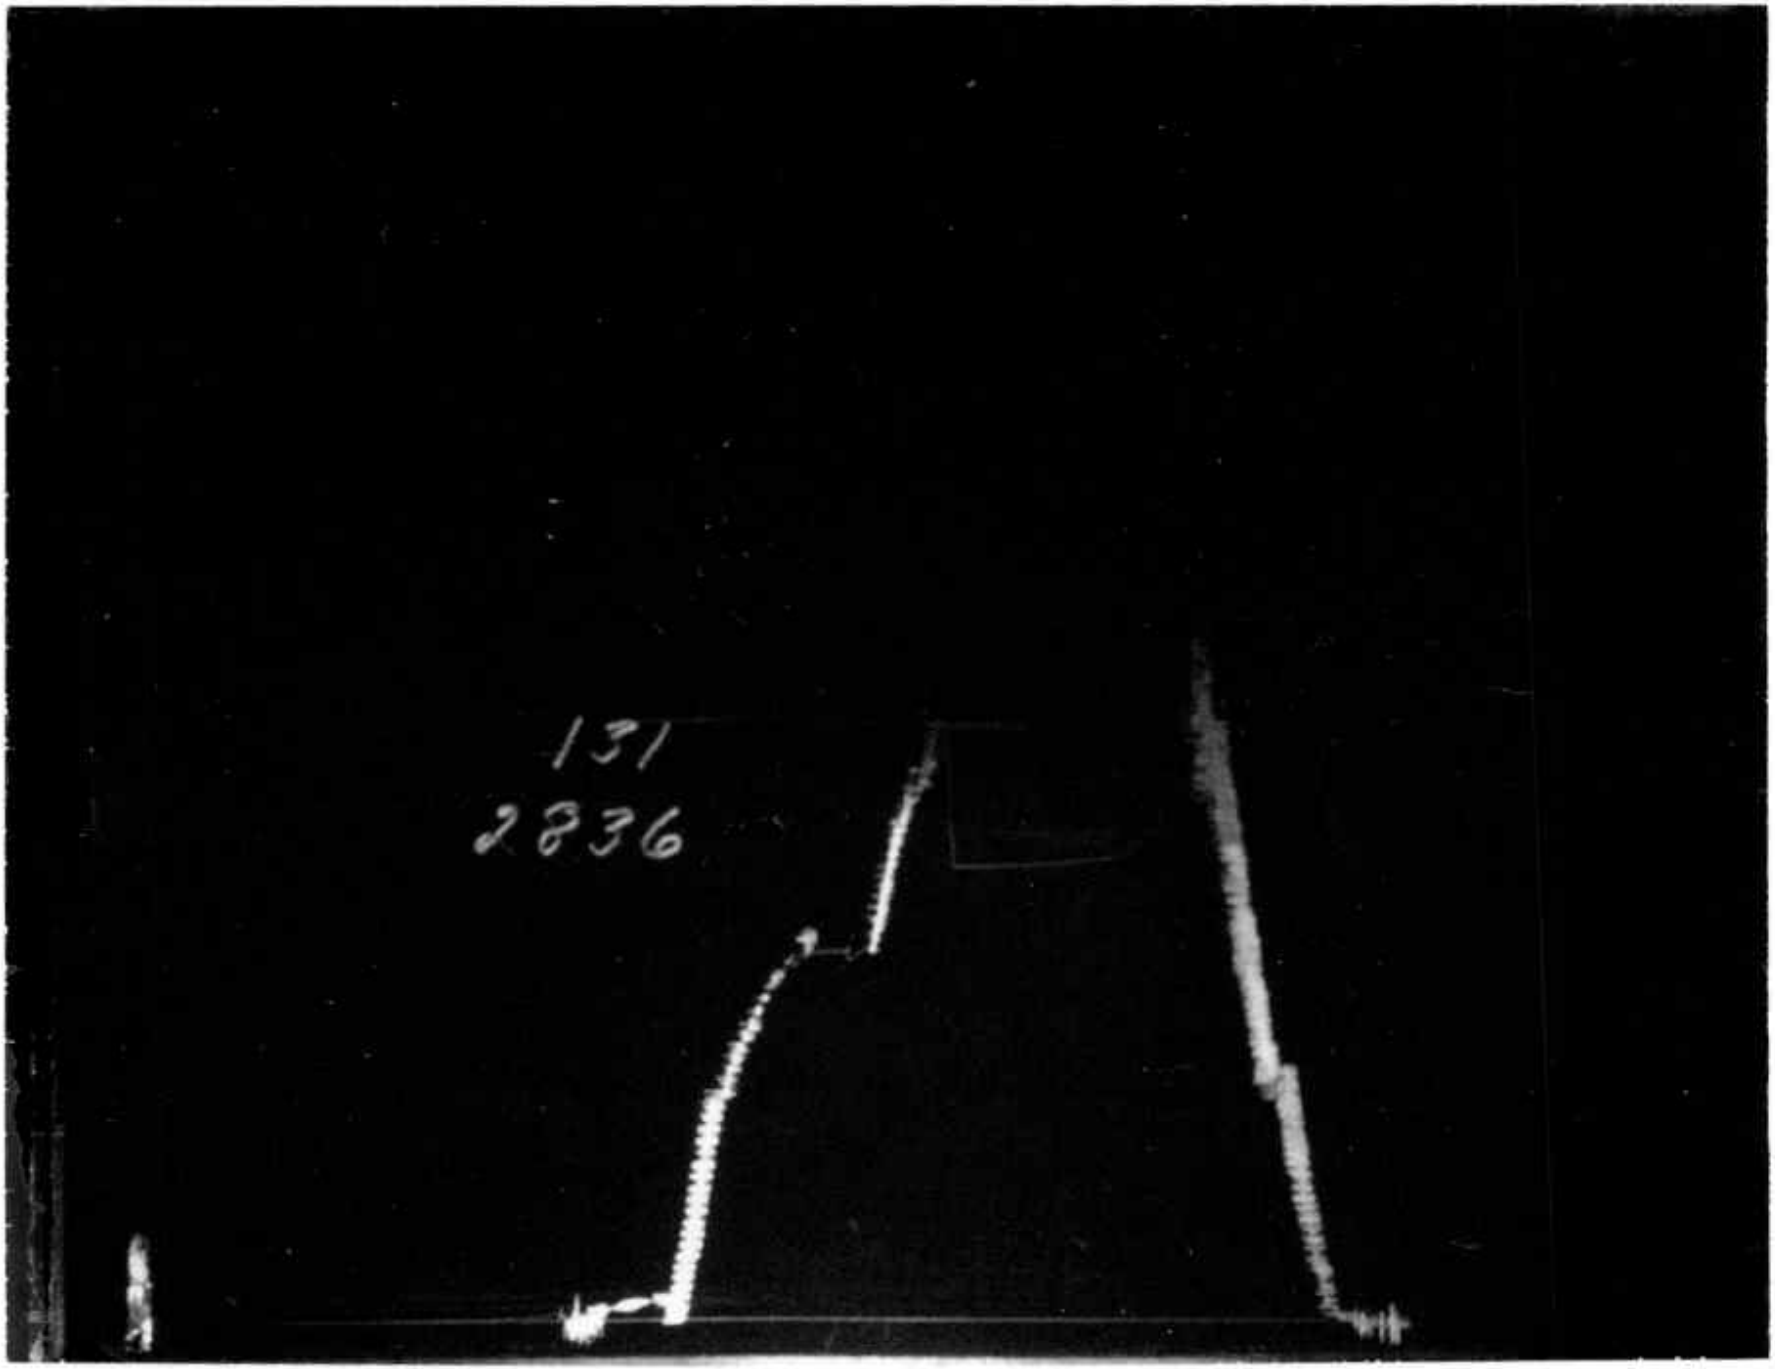
Drill Collar I.D. _____ Ft. Run _____

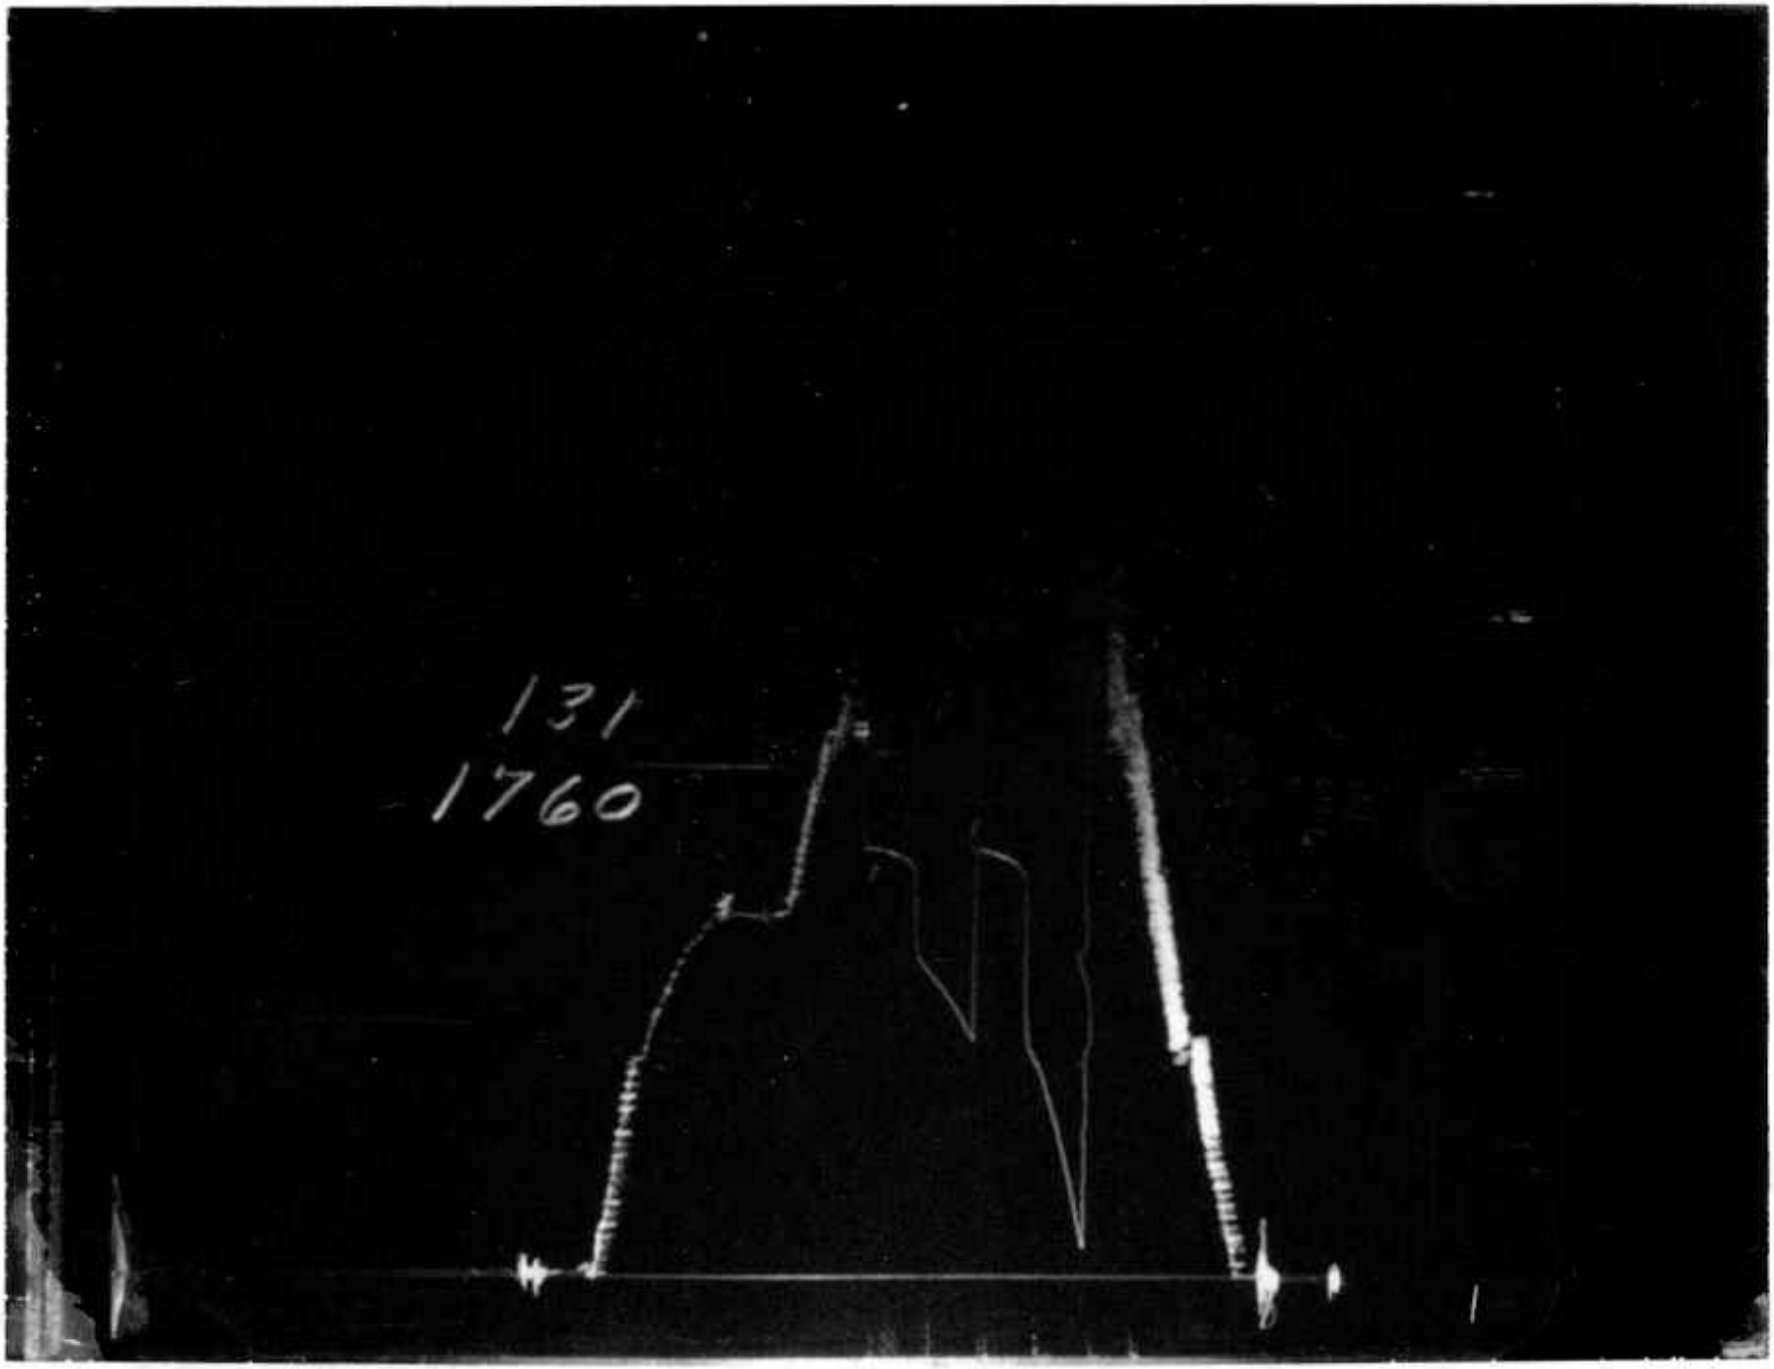
Blow Good throughout test

Recovery 2010' water with few spots of oil

Remarks Straddle Test

EASTERN FORMATION TESTING shall not be liable for damage of any kind to the property or personnel of the party for whom a test is made, or for any loss suffered or sustained, directly or indirectly, through or in the course of the use of its equipment, or its statement or opinion concerning the result of any test, all of which loss or damage is assumed by the customer. Tools lost or damaged in the hole shall be paid for at cost by the party for whom test is made.


131
2836


131
1760