MILLER TESTING COMPANY

Box 547

GREAT BEND, KANSAS

Company K. & E. DRILLING INCORPORATED

Lease and Well No. WARWICK # 1

County BARBER State KANSAS Date MARCH 31, 1963

Formation Test No. 1 Total Depth 4435

Interval Tested 4415 To 4435 Anchor Length 20'

Size Hole 7 7/8 Size Drill Pipe 4 1/2 XH 4 FH Size Packer 6 3/4

Mud Weight 9.7 Viscosity 45 Bottom Hole Temp. ° F

Chokes: Top 1/2 Bottom 1/2 Ticket No. 6465

RECOVERY

INITIAL OPENING 6 MINUTES.
STRONG B LOW, GAS TO SURFACE IN 6 MINUTES.
GAUGED 650,000 CFPD IN 5 MINUTES
" 629,000 " " 15 "
" 622,000 " " 30 "
" 622,000 " " 45 "
" 622,000 " " 60 "

62 FEET OF GAS CUT MUD

Lease and Well No. WARWICK # 2 2 33S 13W C NE NW

Formation Test No. 1

7 Well File

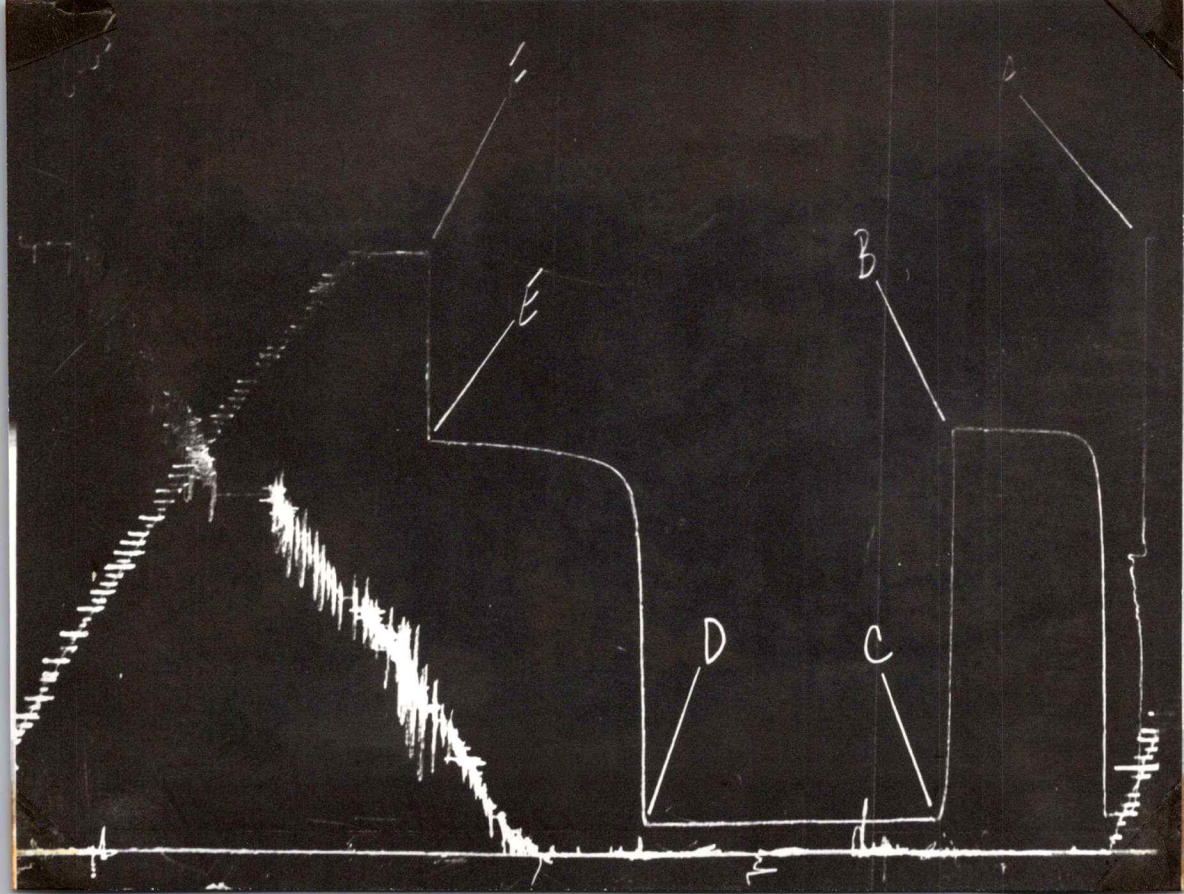
Time: Each Square _____ minutes

Pressure: Each Square _____ psi

Tool Open 1 hr. _____ mins: Shut-in: Initial _____ hr. 30 mins: Final _____ hr. 45 mins.

	Field Reading	Corrected Reading
(A) Initial Hydrostatic Pressure	2380	2380
(B) Initial Shut-in Pressure	1640	1640
(C) Initial Flow Pressure	140	140
(D) Final Flow Pressure	140	140
(E) Final Shut-in Pressure	1630	1630
(F) Final Hydrostatic Pressure	2370	2370

6465


A
B
C
D
E