

15-185-00480

BEE FORMATION TESTING COMPANY, INC.

EAST 4TH STREET

GREAT BEND, KANSAS

17-24-13W

Company Petroleum Incorporated Date 5-16-58
 Address 352 North Broadway Wichita, Kansas
 Lease Harrison Well No. 1 Test No. 1 No. of Copies
 Pressure Recorder (Cap) Top 3500# Bottom 3500# Mud Wt. 10#
 Total Depth 3670' No. Feet Tested 69' Packer(s) set at 3601' and ----
 Packer Set 1:57 I.B.H.P.T. 2:00 M. Tool Opened 1 Hr. ---- Min.
 I.S.I.P. ---- Hr(s) 20 Min. F.S.I.P. ---- Hr(s) 20 Min. Total Time On Bottom 1 Hr(s) 43 Min.
 Blow good through out test
 Recovery gas to surface 16 minutes
 Remarks:
 I.H.P. 1880# 150' gas cut mud Choke Top 1/2"
 I.S.I.P. 1120# 230' heavy oil & gas cut mud Choke Bot 1/2"
 I.F.P. 180# 60' froggy oil
 F.F.P. 220# 270' clean oil
 F.S.I.P. 760# 15' oil clear salt water
 F.H.P. 1880# 45' water
 Extra Equipment none Jars ---- Straddle Packer ---- Safety Joint ----
 Test OK yes Mis-Run no Tool Plugged no Anchor Plugged no

Operator J. D. Turner Formation ---- Test Ticket No. 2566




BEE FORMATION TESTING COMPANY, INC.

EAST TENTH STREET

GREAT BEND, KANSAS

Company Petroleum Incorporated Date 5-16-58
Address 352 North Broadway Wichita, Kansas
Lease Harrison Well No. 1 Test No. 2 No. of Copies _____
Pressure Recorder (Cap) Top 3500# Bottom 3500# Mud Wt. 10#
Total Depth 3724' No. Feet Tested 51' Packer(s) set at 3673' and ----
Packer Set 5:52 I.B.H.P.T. 5:55 M. Tool Opened 6:15 M. Tool Open 1 Hr. ---- Min.
I.S.I.P. ---- Hr(s) 20 Min. F.S.I.P. ---- Hr(s) 20 Min. Total Time On Bottom 2 Hr(s) 3 Min.
Blow weak 8 minutes - bypassed tool - weak 2 minutes - died remainder
Recovery 15' drilling mud
Remarks:
I.H.P. 1900# Choke Top 1/2"
I.S.I.P. ---- Choke Bot 1/2"
I.F.P. ----
F.F.P. ----
F.S.I.P. 100#
F.H.P. 1900#
Extra Equipment none Jars ---- Straddle Packer ---- Safety Joint ----
Test OK yes Mis-Run no Tool Plugged no Anchor Plugged no

Operator J. D. Turner Formation ---- Test Ticket No. 2567

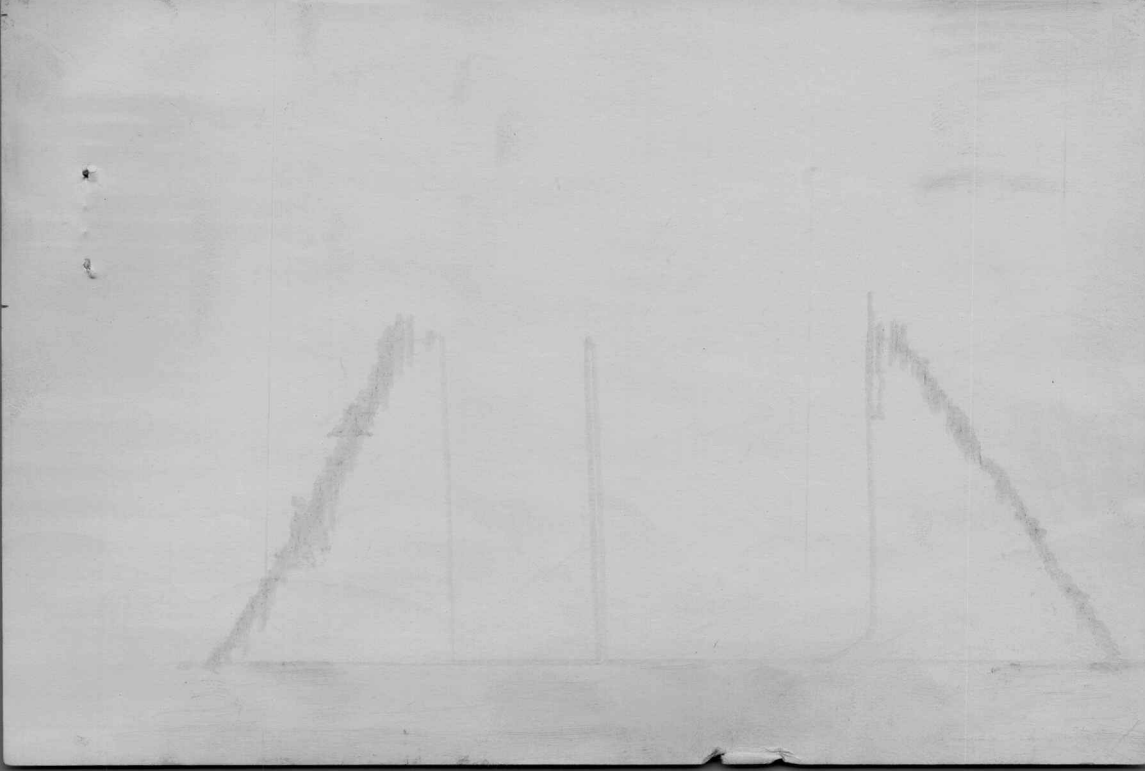

BEE FORMATION TESTING COMPANY, INC.

EAST 10TH STREET

GREAT BEND, KANSAS

Company Petroleum Incorporated Date 5-17-58
 Address 352 North Broadway Wichita, Kansas
 Lease Harrison Well No. 1 Test No. 3 No. of Copies _____
 Pressure Recorder (Cap) Top 3500# Bottom 3500# Mud Wt. 10#
 Total Depth 3768' No. Feet Tested 40' Packer(s) set at 3728' and -----
 Packer Set 6:37 I.B.H.P.T. 6:40 M. Tool Opened 7:00 M. Tool Open 1 Hr. ----- Min.
 I.S.I.P. ----- Hr(s) 20 Min. F.S.I.P. ----- Hr(s) 20 Min. Total Time On Bottom 2 Hr(s) 3 Min.
 Blow good through out test
 Recovery gas to surface 14 minutes - 37' gas cut mud
 Remarks:
 I.H.P. 2000# Choke Top 1/2"
 I.S.I.P. 1420# Choke Bot 1/2"
 I.F.P. -----
 F.F.P. -----
 F.S.I.P. 1320#
 F.H.P. 2000#
 Extra Equipment none Jars ----- Straddle Packer ----- Safety Joint -----
 Test OK yes Mis-Run no Tool Plugged no Anchor Plugged no

Operator J. D. TurnerFormation -----Test Ticket No. 2568




BEE FORMATION TESTING COMPANY, INC.

EAST TENTH STREET

GREAT BEND, KANSAS

Company Petroleum Incorporated Date 5-17-58
 Address 352 North Broadway Wichita, Kansas
 Lease Harrison Well No. 1 Test No. 4 No. of Copies _____
 Pressure Recorder (Cap) Top 3500# Bottom 3500# Mud Wt. 10.1#
 Total Depth 3855' No. Feet Tested 83' Packer(s) set at 3772' and ----
 Packer Set 9:02 I.B.H.P.T. 9:05 M. Tool Opened 9:25 M. Tool Open 1 Hr. ---- Min.
 I.S.I.P. ---- Hr(s) 20 Min. F.S.I.P. ---- Hr(s) 20 Min. Total Time On Bottom 2 Hr(s) 13 Min.
 Blow fair through out test
 Recovery 15' drilling mud slightly oil specked
 Remarks:
 I.H.P. 2030# Choke Top 1/2"
 I.S.I.P. ---- Choke Bot 1/2"
 I.F.P. ----
 F.F.P. ----
 F.S.I.P. ----
 F.H.P. 2030#
 Extra Equipment none Jars ---- Straddle Packer ---- Safety Joint ----
 Test OK yes Mis-Run no Tool Plugged no Anchor Plugged no

Operator J. D. Turner Formation ---- Test Ticket No. 2569

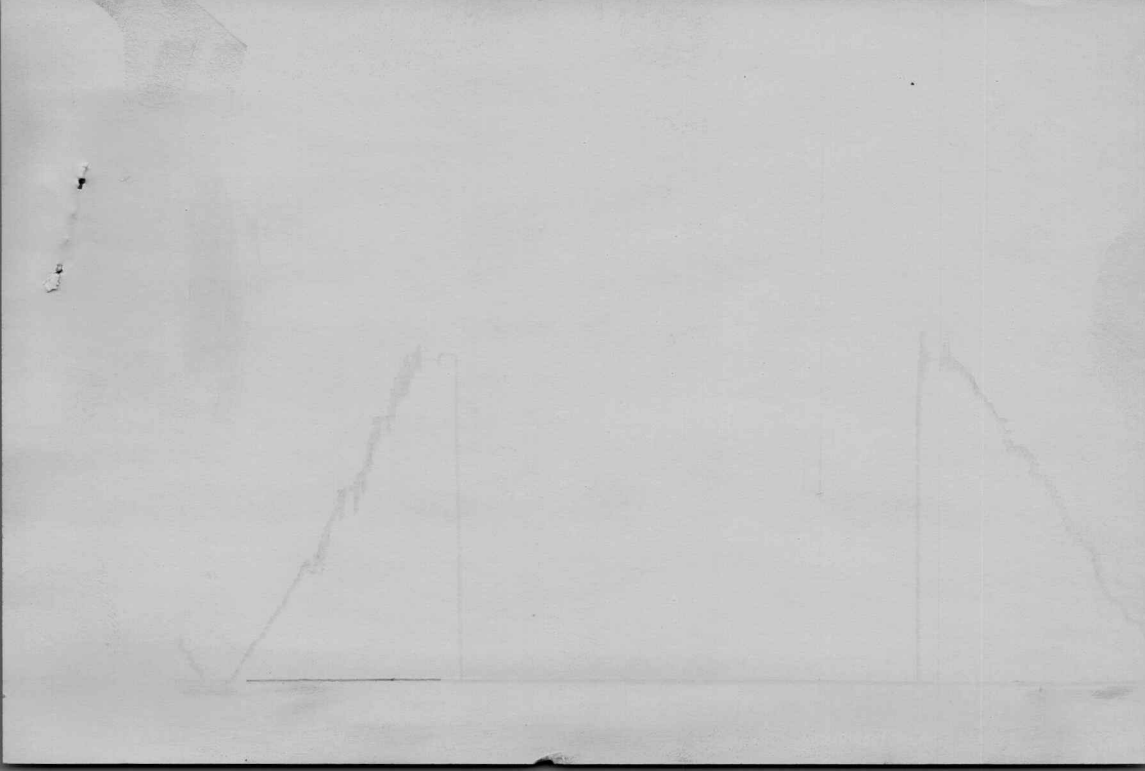

BEE FORMATION TESTING COMPANY, INC.

EAST 10TH STREET

GREAT BEND, KANSAS

Company Petroleum Incorporated Date 5-18-58
Address 352 North Broadway Wichita, Kansas
Lease Harrison Well No. 1 Test No. 5 No. of Copies _____
Pressure Recorder (Cap) Top 3500# Bottom 3500# Mud Wt. 10#
Total Depth 3905' No. Feet Tested 23' Packer(s) set at 3882' and ----
Packer Set 10:37 I.B.H.P.T. 10:40 11:00 M. Tool Open 1 Hr. ---- Min.
I.S.I.P. ---- Hr(s) 20 Min. F.S.I.P. ---- Hr(s) 20 Min. Total Time On Bottom 2 Hr(s) 3 Min.
Blow good through out test
Recovery gas to surface 8 minutes - 55' gas cut mud
Remarks:
I.H.P. 2020# 140,000 - 10 minutes Choke Top 1/2"
I.S.I.P. 1320# 146,000 - 20 minutes Choke Bot _____
I.F.P. ---- 151,000 - 30 minutes
F.F.P. ---- 153,000 - 40 minutes
F.S.I.P. 1240# 156,000 - 50 minutes
F.H.P. 2020# 156,000 - 60 minutes
Extra Equipment none Jars ---- Straddle Packer ---- Safety Joint ----
Test OK yes Mis-Run no Tool Plugged no Anchor Plugged no

Operator J. D. Turner Formation ---- Test Ticket No. 2570

