STATE
KANSAS
COUNTY
GRAHAM
BLOCK
SEC.
34
T. 6S
R. 23W

COMPANY ANDERSON-PRICHARD
FARM DIETZ
WELL NO. # 1
SURVEY
TOTAL DEPTH 4143
SW SW SW
COMMENCED
COMPLETED
REMARKS

ALTITUDE
2441
PRODUCTION
D & A

CASING RECORD

HEEB 3674	ARB: 4102
BR LIME 3700	
LANS 3710	
B/KC 3906	
CONG 4060	

SHOT QUARTS BETWEEN

FORM 186 - In stock and for sale by Mid-West Prtg. Co., Tulsa

100
200
300
400
500

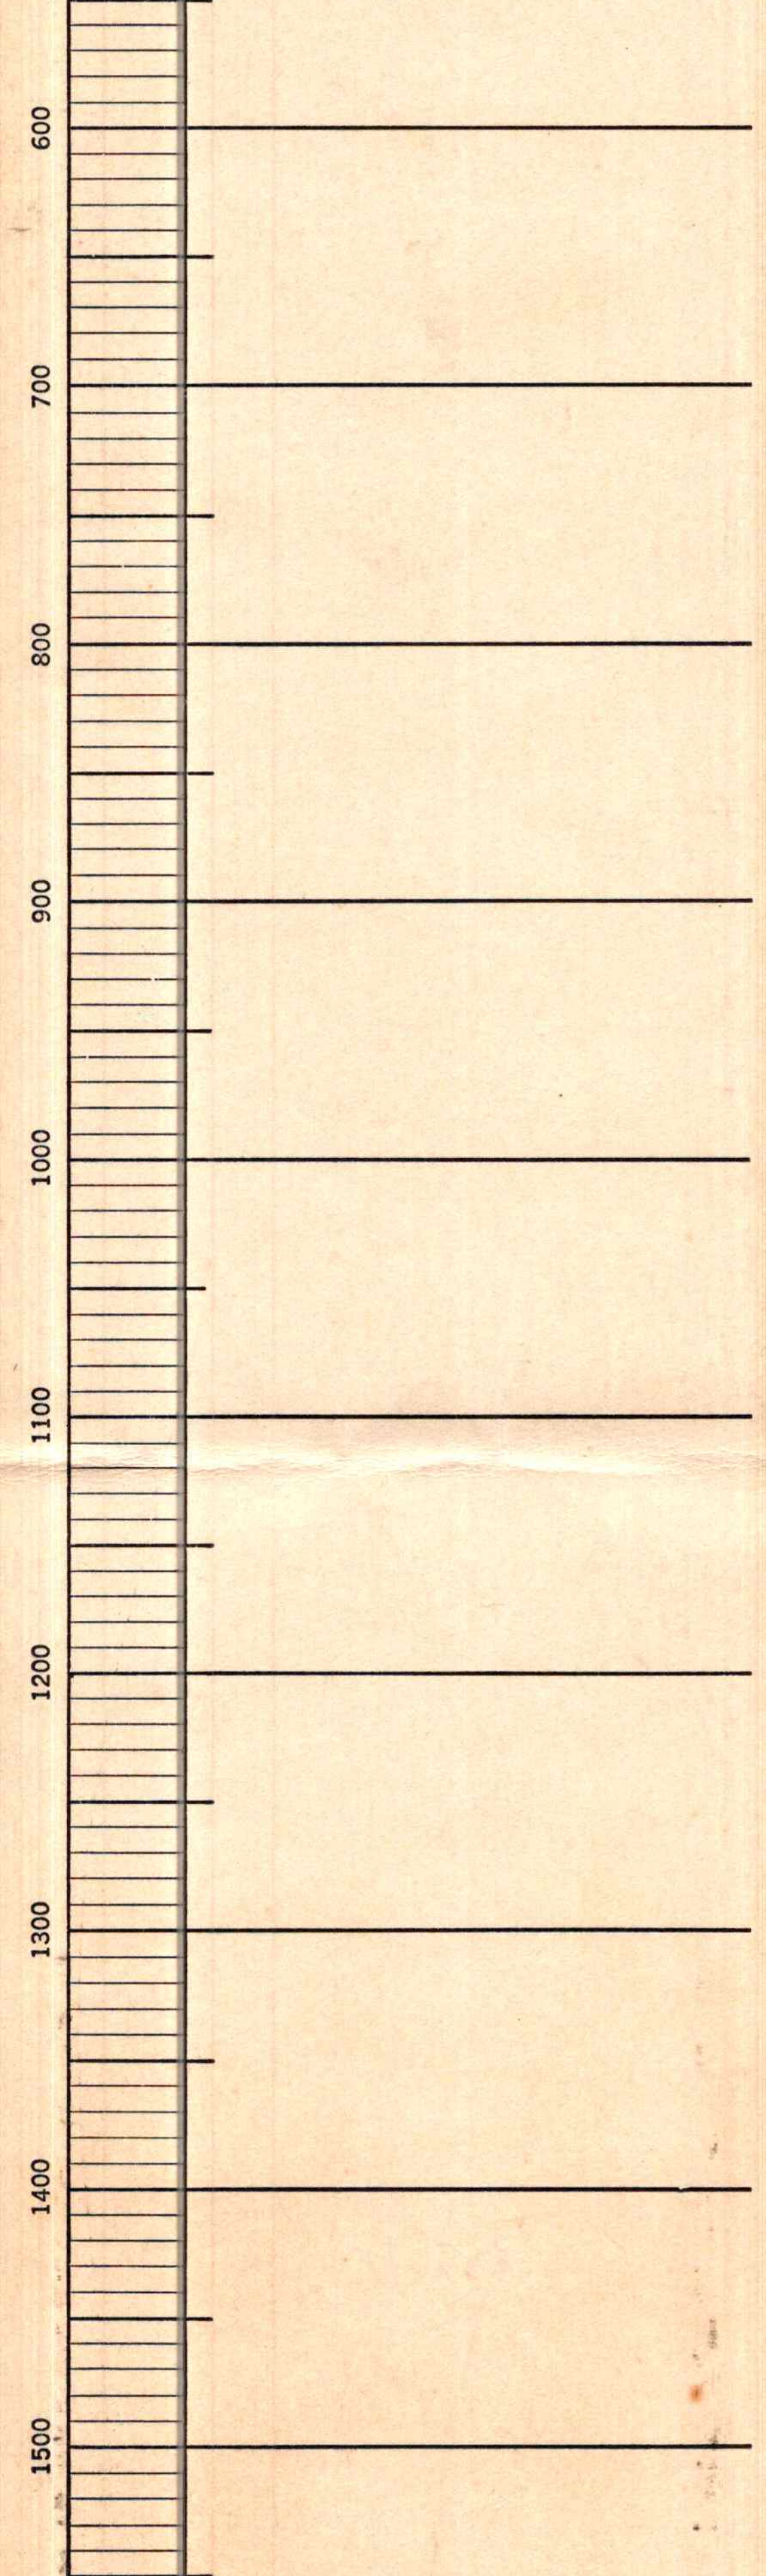

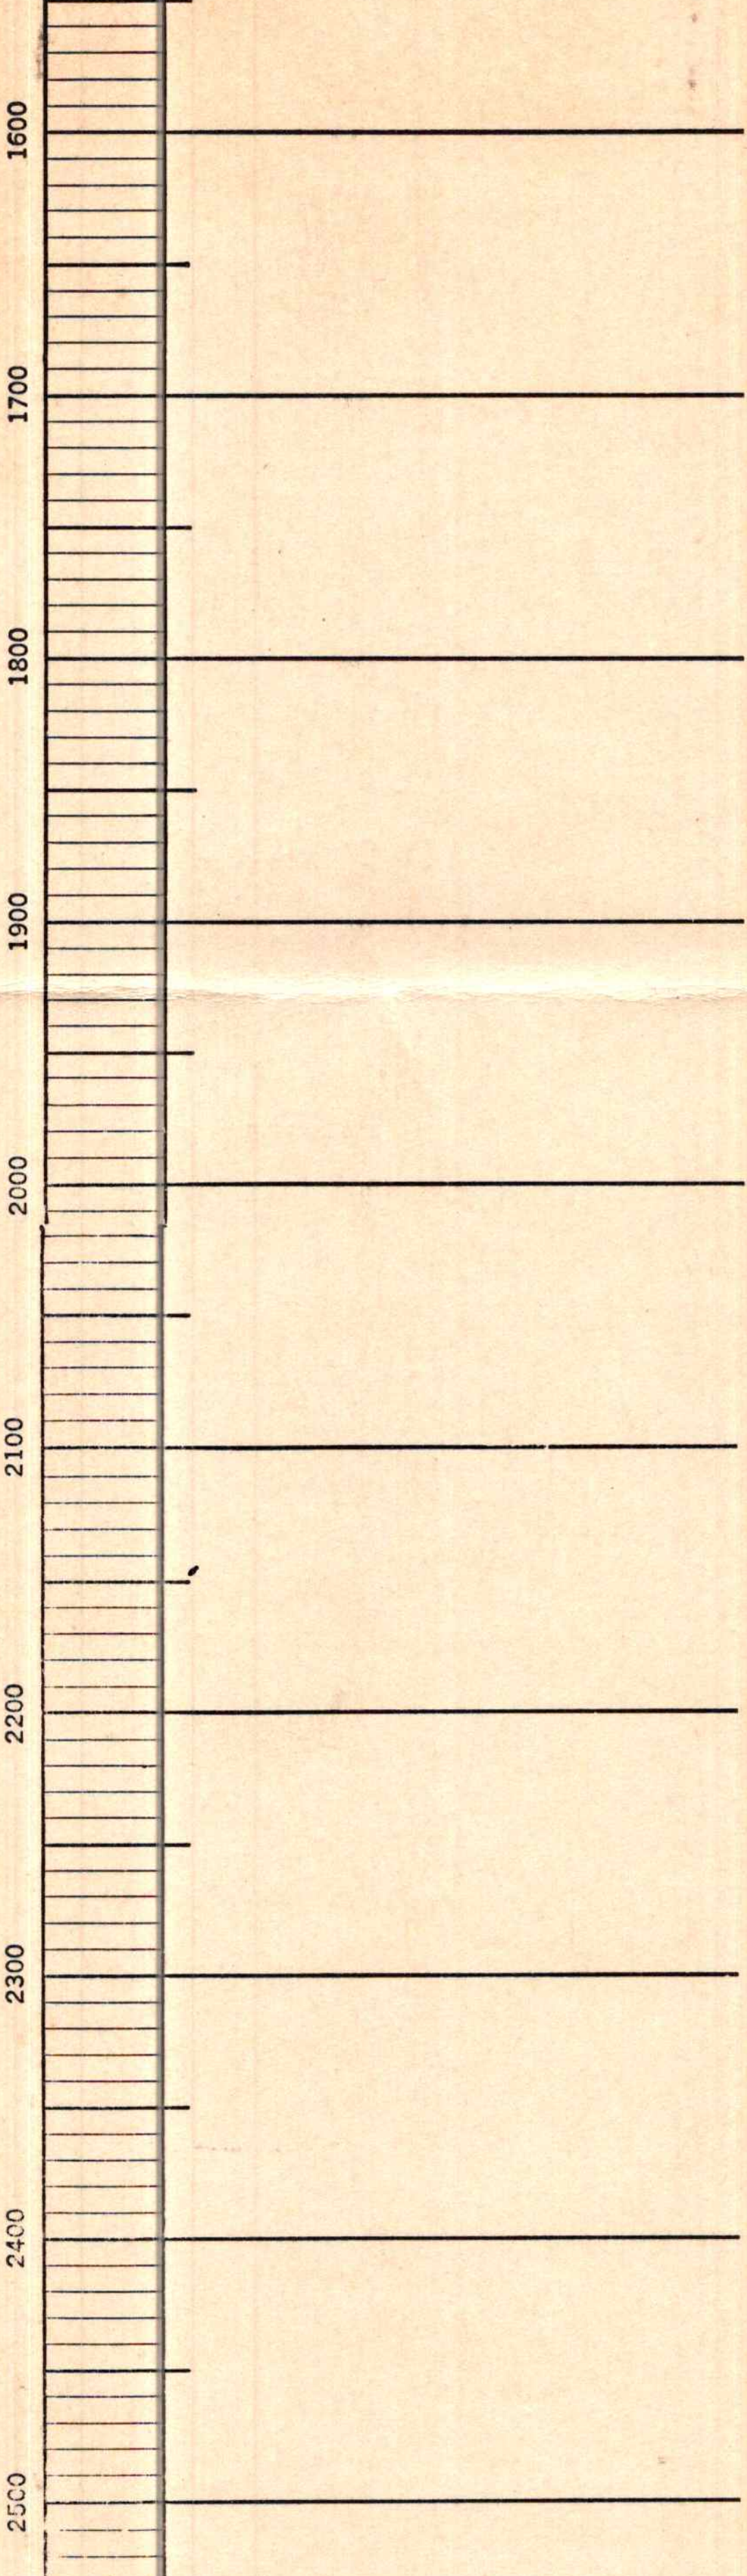

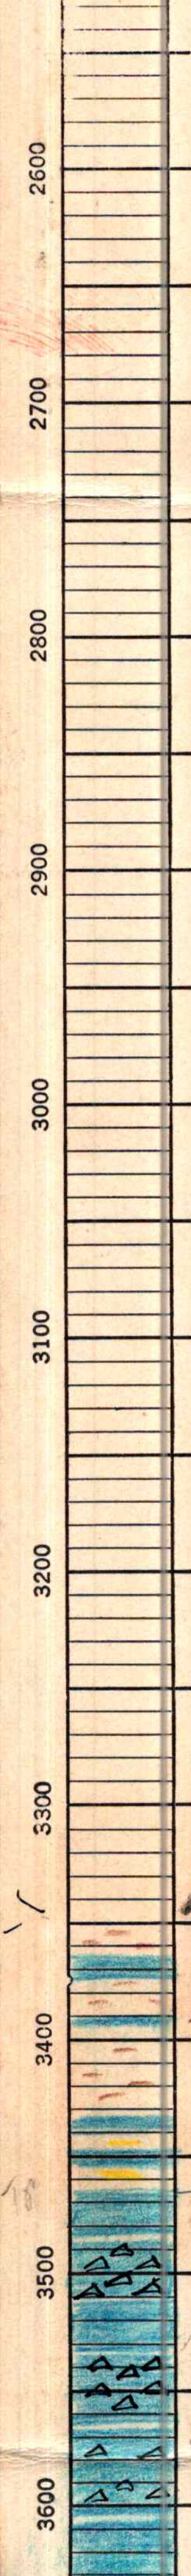

= =

Samples start 3350'

lt. gray, f. fos

''

g, f. fusulinidal lst.

''

c+g, f.

Topeka 3464

c-g, f. fos. △y

g, f. fos.

c-g, f. fos. △y

c-g, d. f.
△y in part

c-g, dy f. fos.

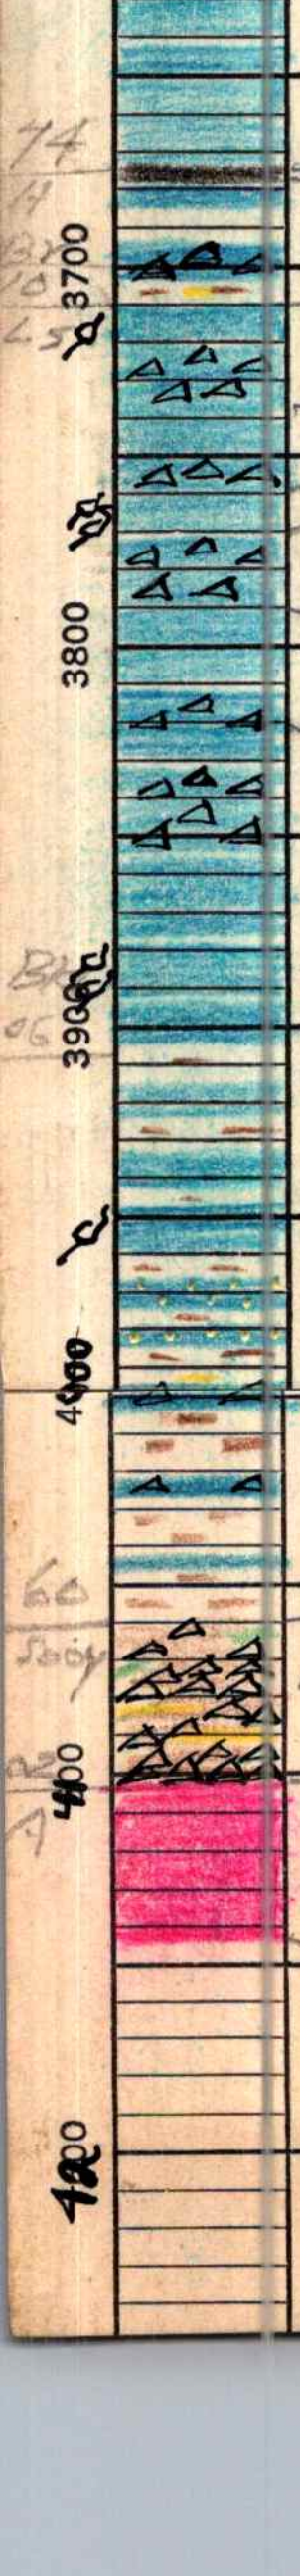

c-g, f. fos. p.p. por.

Heebner Sh. 3674

74 blk. sh.
78 g, d-f,
c, d-f, Δy

Lansing 3710

10 c, d-f, ool.
c, dse. Δy
c-g, d-f. Δy in part.
68
g, por. occ. lst. spots dk. oil stn.
c, d-f, Δy. scat. occ. por. & spots faint oil stn.
c, d-f.

c, dse, Δy.
g-bf, f.
c, d-f, Δy

c-g, d-f.
c-g, por. occ. lst. dk. oil stn.
k, dse

c, d-f
"
g, d-f, oolitic in part
c-g, f. Xln. sandy lst.
pink Δ in c, d-f.

c, d-f, Δy
c, d-f

Penn. Bsl. Congl. 4060

60
vg. sh. & v. col. Δ. sandy in streaks.

Arbuckle 4102

02 gray-bf, med. to c. Xln. dol. porous in streaks. Spots slight oil-stn.

T.D. 4143

D&A