



STATE Kansas		FIELD	
COUNTY Sheridan		COMPANY Continental Oil	
SEC. 2	WELL NO. 4	FARM A. M. Bouts	
T. 6	R. 27 W	DATE COM. 12-21-44	DATE COMPL. 2-11-45
		FOOTAGE LOG SW SE SE 330' N & 990' W SEc	
		SHOT QUARTS BETWEEN	
		ACID GALS. BETWEEN	
ALT.		CASING 10-3/4" 6"	236' Cem. 3862' Cem.
INIT'L. PROD. Phy. Pot. 793 B.		REMARKS	
T.D. 3864			

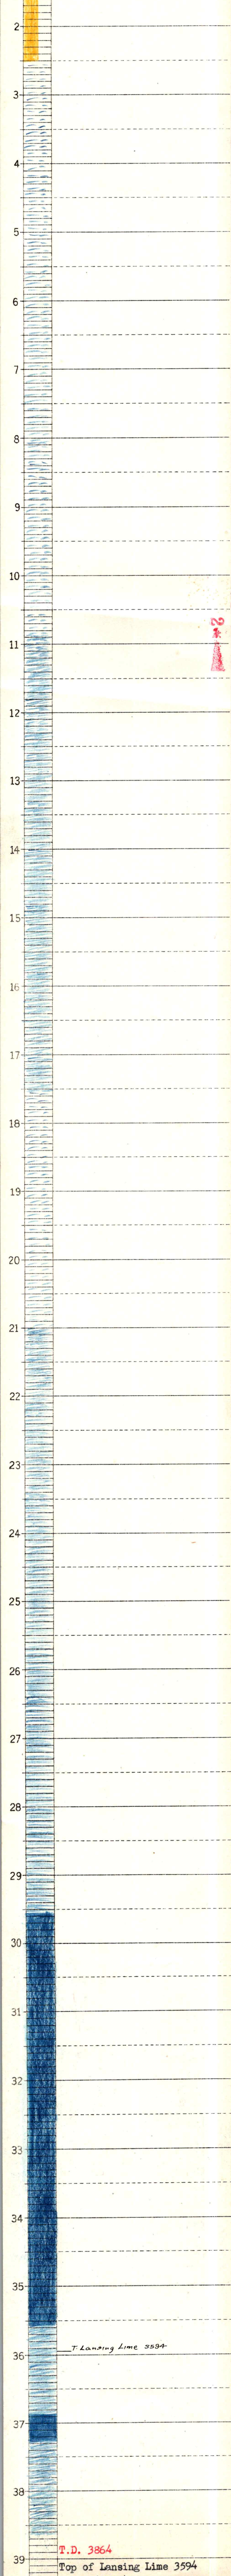

"1-22-45 Drilled out cement to 3847
ran Radioactivity log; perf. 6"
OD csg. as follows: 3833-3844
w/36 shots, 3810-25 w/36 shots,
3787-95 w/24 shots,
3772-83 w/36 shots,
3754-62 w/24 shots,
3712-20 w/24 shots,
3695-3708 w/36 shots,
3670-78 w/24 shots.

1-25-45 Hole filled 2350 w/water
& 800' w/oil; swbd 15 bbls. wtr
& 1 bbl. oil per hr.

2-2-45 Dumped a total of 25 sacks
of cem. on btm to plug off perf.
which were producing wtr; top of
cement 3659.

2-7-45 Ripped 6" OD csg. 3643-55;
hole filled 1950 w/oil in 6 hrs;
swbd 17½ bbls. oil per hr. off
btm.

2-8-45 Ripped csg. 3625-32, 3608-16,
& 3590-3610; hole filled 3050
w/oil.

2-11-45 Swbd 42 BOPH for 3 hrs.
off btm.

2-17-45 Established a 24 hr. phy.
pot. of 793 BO.

Note: Footages are calculated from
derrick floor level, except for-
mations. It is 2½' from derrick
floor to ground level.

TD 3864 in Lansing lime (Top of
cement 3659) "