2-76

STATE Kansas	COMPANY Aladdin
COUNTY Logan	FARM Cooper WELL NO. 1
BLOCK	SURVEY
SEC. 22	
	4675
T. 11S R. 32W	TOTAL DEPTH
	6-55-71E
o	COMMENCED
	COMPLETED
	REMARKS Elog
ALTITUDE 3028 KB	
PRODUCTION 25BOPD	

CASING RECORD

SHOT QUARTS BETWEEN

FORM 186 - In stock and for sale by Ross-Martin Co., Tulsa

100

200

300

400

500

600

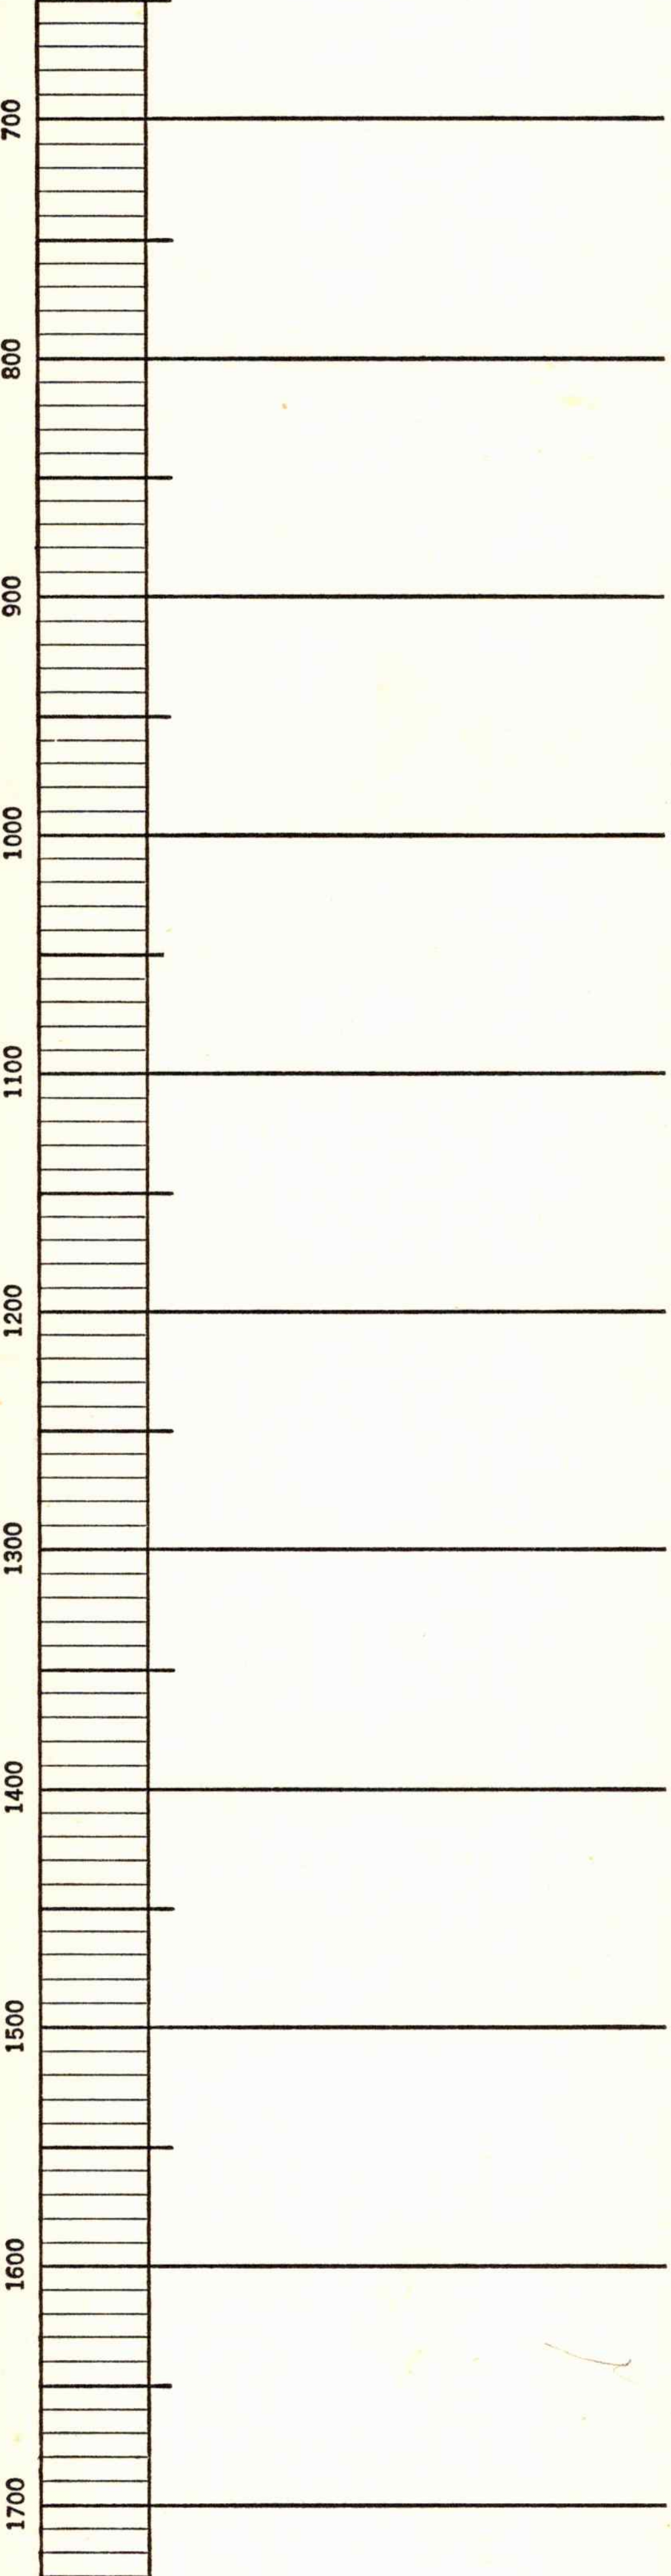

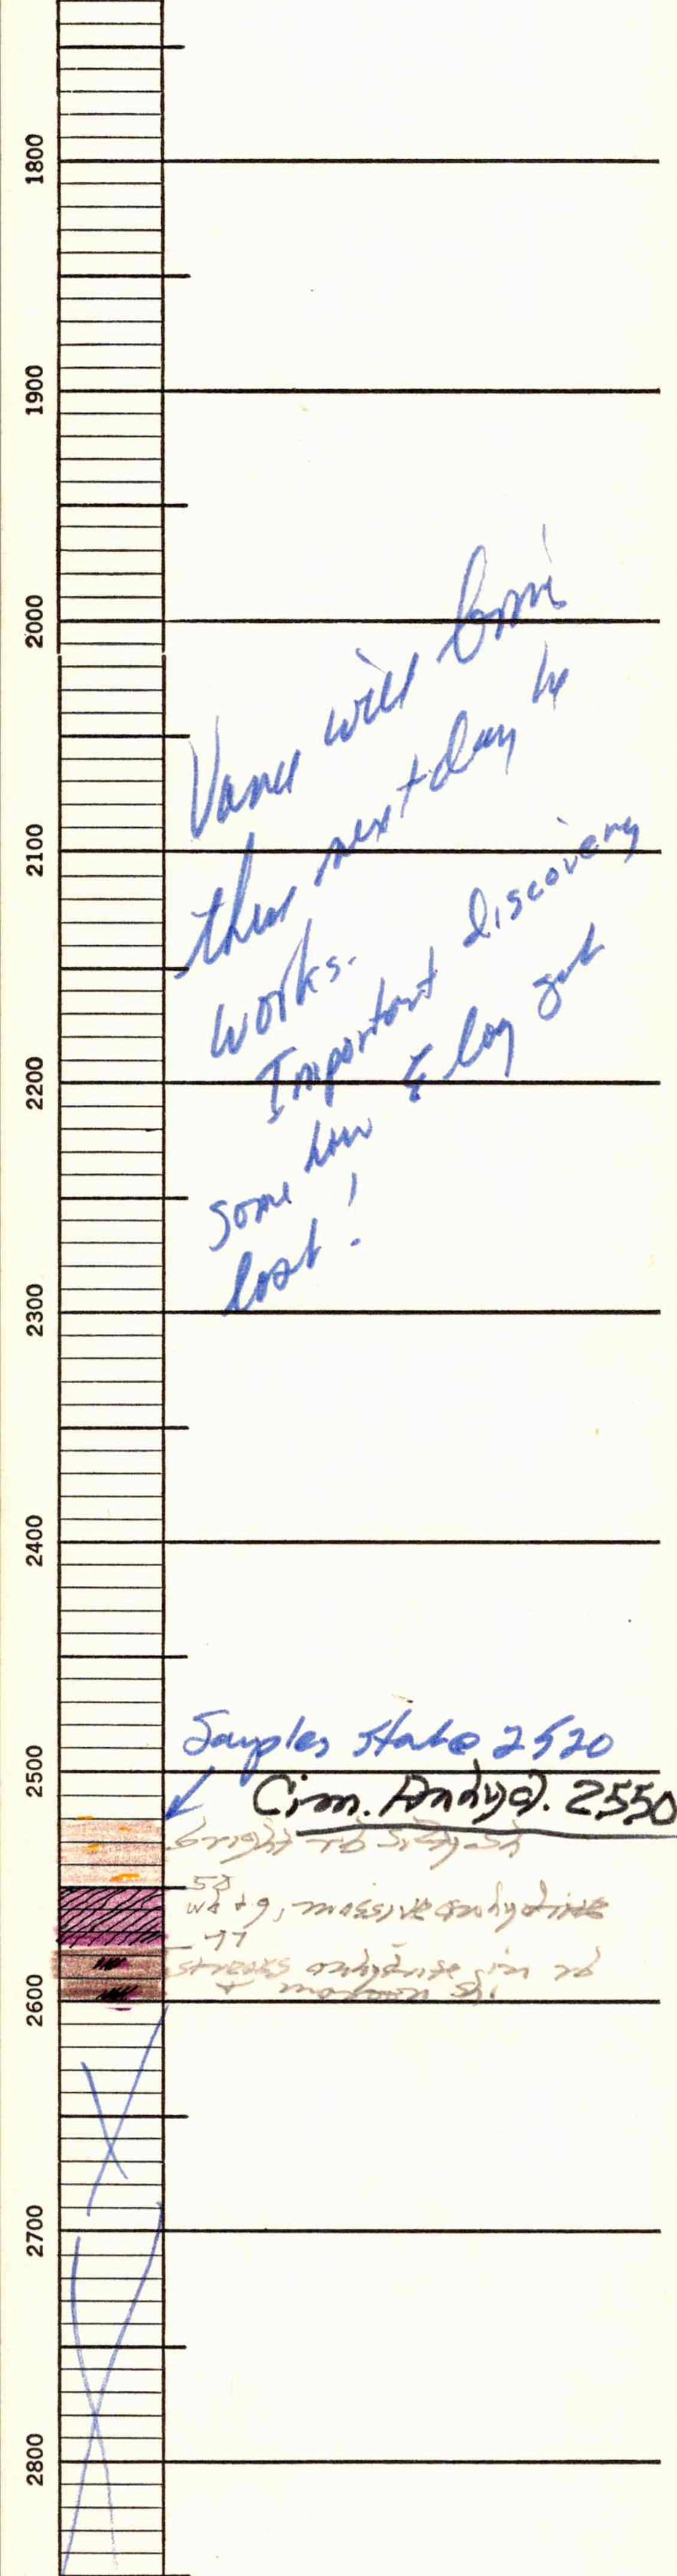

Vance will brin them next day he works. Important discovery some how & log got lost!

Samples Start 2520

Cim. Anhyd. 2550

bright red siltst

53

wh + g, massive anhydrite

77

streaks anhydrite in rd + maroon sh.

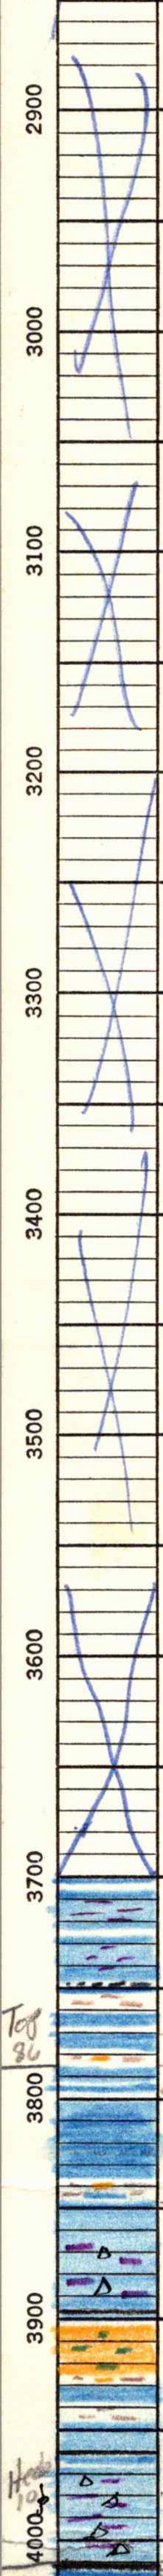

g. ltt. lst

tan f.g. gran dolo. lst

scat p.p. pore in lst, g to dk gr dolo. f.xlln foss. sh, pale sh

tt, g to bk. Sh on bt, be lst

v. calc. sh

gd ltt, foss lst

" v. calc. lst, sdy sh.

— oolg, f.xlln lst

c, g d ltt, ltt. fos lst

TP 3848

v. calc. sh, sdy grey. sh

—48

wh to c. ltt. fos, sh. ay lst. porous lst, oolitic in part

streak bluish on bt, f.xlln. lst

g, very f.g. sltst, micac, soft friable ss, calc. sst, sdy at base

c-lt. g.d. f.xln lst,

g. ltt fos lst

streak blue sh only, ltt xln lst

scat. poor pos in c-g, suc to f.xlln fos / sh dolomitic lst

Heeb Sh 4010

—18 blk sh

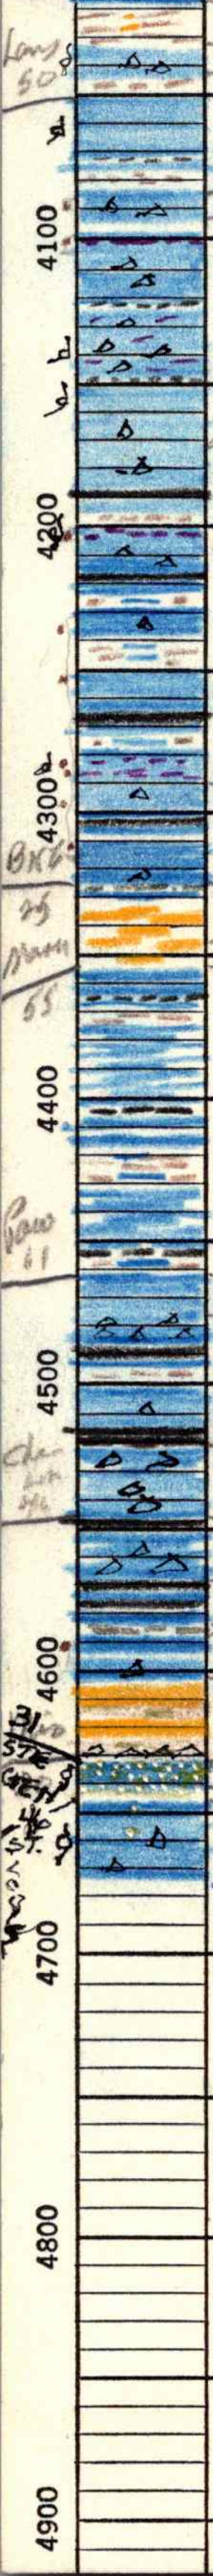

19 v.col. sh, sdy sh.
34 c-lt, dt-fos sl sdy, fairly ool lst
44 v.col. sh
50

Toronto 4034

scat ooc + p.p. por in c-g, dt.xln lst
dk.g. sh. on bf, dse lst

Ls 4050

v.col. sh.
84
95 scat vuggy por + sl spotty oil stain
c-g, dt.xln sdy lst

wh tan c-g dt.xln sl dy lst. p.p. por + sl dolomitic at top with trace oil stn
dk.g. sh
c-tan, suc to f.xln dy sl ool lst
ool + ooc near base
dk.g. sh

wh to c-g dt.xln sl dy lst. scat ooc por at top
blk sh on bf to brn dt.xln. lst
v.col. sh

c-g dt.xln sl. dy lst. por, ooc & dolomitic, with trace oil stn at top
streaks blk sh on bf, dse lst.
v.col. brny sh
wh + lt.g. dt.xln sl, dy lst. Trace oil stn
v.col. brny sh

c-lt.g. dt.xln. Trace oil stn at top
blk sh on brn dt.xln lst
v.col. brny sh
sl spotty oil stain in lt.g to bf, suc to f.xln
sl. ool + ooc sdy dolo lst.
c-g, dt.xln ool, dy lst. Trace oil stn
streaks blk sh on g [illegible]

BKC 4325

c, dt.xln lst. sl p.p. por with trace
25 oil stn at top, sl dy at base
dk.g. sh. on bf, dse lst
g.t.g. tubu micac, broken shly sst
56 lt.g dse lst
dk.g to blk sh on bf, dse lst
v.col. sh.
c-g, dt.xln, thin-bedded shly lst
dk.g to blk sh on lt, dse lst
g, dt.xln lst
v.col. brny sh
g, dt f.xln shly lst
dk.g to blk sh
v.col. brny sh
61
c, dse to lithographic lst
76 fusulinids in lt.g. f.xln, dy lst
blk sh. on bf to brn dt.xln. lst
v.col. sh
c, dt fos, sh dy lst
blk sh + some v.col sh

Ft. Scott 4531

lt.g, dt + brn dt fos dy, sl shly
tight lst
46 blk sh
50
lt.g to bf, dse dy sl shly lst
64 lt dse lst interbedded with
dk.g to blk sh
spotty oil staining lt + brn dt fos lst
lt.g, dse sl dy lst

PBC 4603

03
wh + g, very f.g. friable to tight & glassy sst interbedded with vg clay & sh,
v.col. & at base
31 lt.g, f. green, finely arenaceous micro-
41 crystalline lst
46 pale grayish-green sh

Miss 4631

wh, cream + lt.g, dse to f.xln sdy lst. Finely oolitic
some pink sub [illegible] oolitic in part

T.D. 4675

J56