
STATE	COMPANY		
Kansas	Texas		
COUNTY	FARM	WELL NO.	
Russell	Morganstern		
BLOCK	SURVEY		
SEC. 23		TOTAL DEPTH 3441	
T. 15	R. 15W		
	COMMENCED		
	COMPLETED		
ALTITUDE 1889	REMARKS		
PRODUCTION D&A	NW-NW-SE		

CASING RECORD

Dst. 3370-79 1hr.
Rec 22' drlg Mud
Dst. 3417-41 1hr.
Rec. 1500' wtr.

SHOT	QUARTS	BETWEEN

FORM 186 - In stock and for sale by Ross-Martin Co., Tulsa

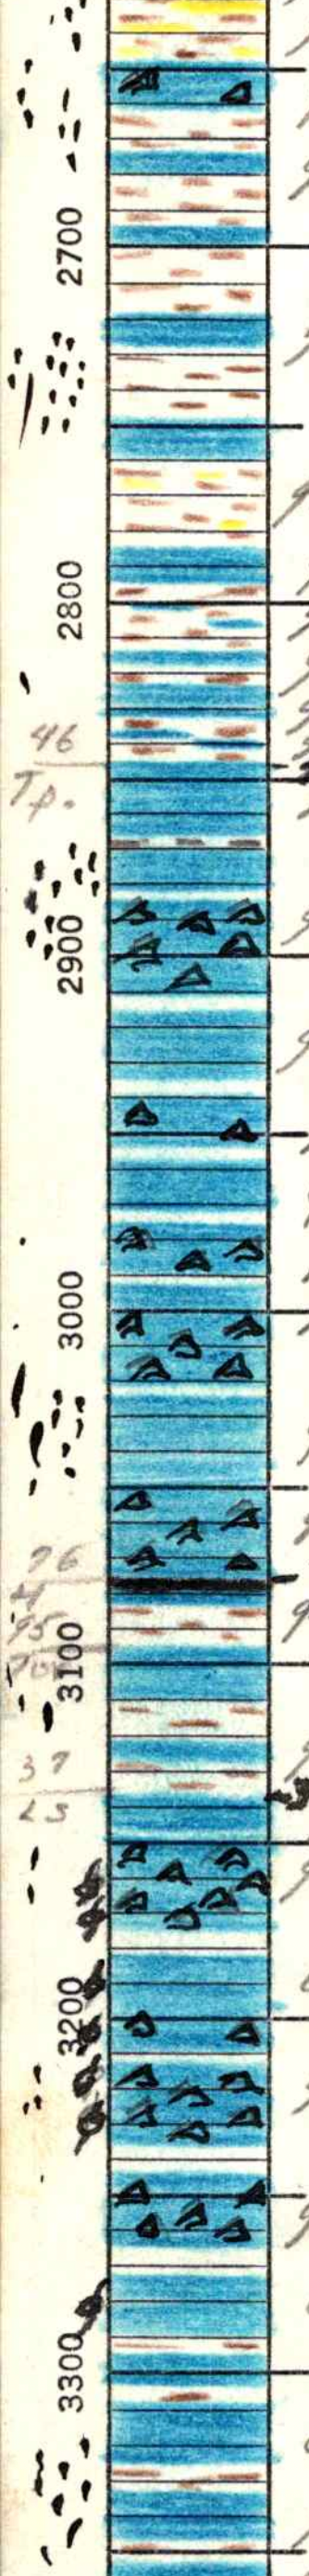

g-brn. sh. sli. lmy.
g-bf. f. fos.
"
g-brn. sh. strks. g. f. fos. Ls.
g-bf. d. f. ay inpart
g-bf. d. f.
g-brn. sh. strks f.g. sst.
g-bf. d. f. sli. ay
g-bf. f. fos.
"
g-bf. f. xln.
"
g-brn. sli. sndy.
g-f. xln. Topeka 2846
g-brn. sh. lmy sh.
g-bf. d. f.
g-f. xln. sli. lmy.
g-brn sh. d. f. fos.
g-bf. d. f.
dove g-bf. d. f.
g-bf. d. f. ay
g-bf. f. fos. sli. por.
g-bf. d. f. sli. ay
g-cr-bf. d. f.
g-bf. d. f. sh. fos. fos.
g-bf. d. f. fos. ay in part.
g-cr-bf. f. sli. por. in part.
g-bf. d. f. sli. ay Heebner 3076
cr-wh. d. f.
g-bf. d. f. Lansing 3137
g-cr-bf. d. f.
g-cr-bf. d. f. ay. fair Ool. por in part.
cr-g. d. f. faintly Ool. sli. ay in part
g-"bf. f. ay Ool. por. sli. Ool. por. in part. St.
g-cr-bf. f. ay.
cr-g. d. to f. xln. sli. Ool.
cr-g. d. f.
cr-g. d. f.
g-bf. d. f. P.B.C 3372
g-cr. d. to f. xln.
abundant v. ch. to wh. sli. Oil St. in vg. sh. , strks. f. g. sst.
15 Arbuckle 3415
g-bf. f-co. xln. sli. ay, vug por. in part. drk. Oil st. at top.

T.D. 3441