11-62

STATE: KANSAS	COMPANY: IMPERIAL
COUNTY: HODGEMAN	FARM: JARNAGIN · WELL NO. 1
BLOCK	SURVEY
SEC. 11	
T. 23 · R. 23w	TOTAL DEPTH 4585'
	C SE NE
	COMMENCED
	COMPLETED
ALTITUDE 2235 KB	REMARKS: E Log
PRODUCTION	

CASING RECORD

DST #1 (Chero) 4434-90': op ½ hr, R 4' Mud, All press 0#

DST #2 (MISS) 4491-4505': op 90", R 525' oil + 120' OCM + 90' SW, IBHP 1350#/20", IFP 190#; FFP 260#; FBHP 1300#/20".

SHOT · QUARTS · BETWEEN

Kraftbilt 186 · ROSS-MARTIN CO. TULSA 1, OKLAHOMA · PRINTED IN U.S.A.

DST #3 (MISS) 4506-15': op ½ hr, R 5' Mud, IBHP 1330#/20"; IFP 0#; FFP 0#; FBHP 1090# 120"


DST #4 (4513-30') FAILED

DST #5 (MISS) 4516-30' op 2 hrs, R 150' SW IBHP 1360#/20"; IFP 0#; FFP 0#; FBHP 1090#/20".

Perf 32/4489-97, swb 15 GOPH, NW/NT, 250 MA, Swb Ld, Swb 3⅓ BOPH, NW/14 hrs, 2000 Ret A, Swb Ld, Swb 5 BOPH, NW/4 hrs, 500 OB, Swb 11 BOPH /16 hrs, FU 550' oil, NW/8 hrs.

SPL TOPS

SAMPLES START @ 3700'

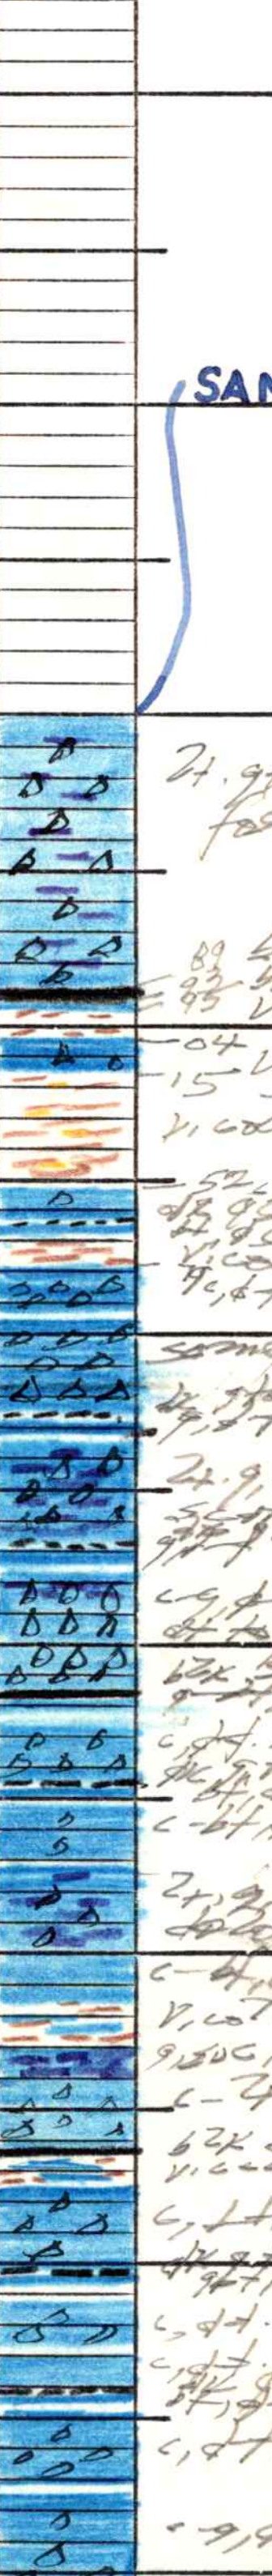

Heebner Sh 3789

Toronto 3804

LS 3852

PBC 4455

ML 4487

TOTAL DEPTH 4585'