RcM

Range 11 W

Township 24 S

Section 27

STAFFORD.
County

RAY McCOMB. No. 1.
Farm

STANOLIND OIL & GAS CO.
Company

Sec.



Twp.



6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	X	26	25
31	32	33	34	35	36

NEc NE

Elev. K 1790 1810' T.D. 4060'

Date Drilled 4-21-38.

Correlation by

PROD. DRY.

QT ? } 160

K

P 35 75

m 121

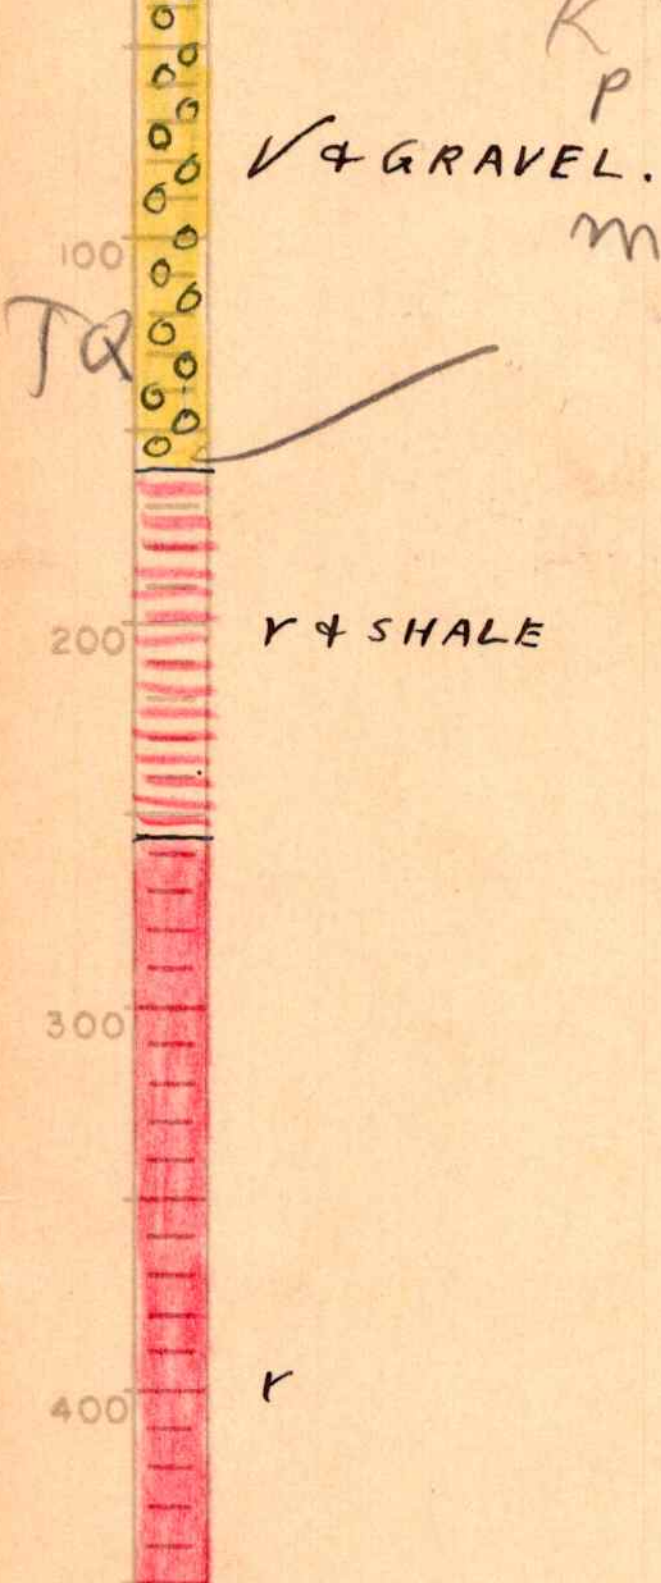
V + GRAVEL.
100
TQ
r + SHALE
200
300
r
400

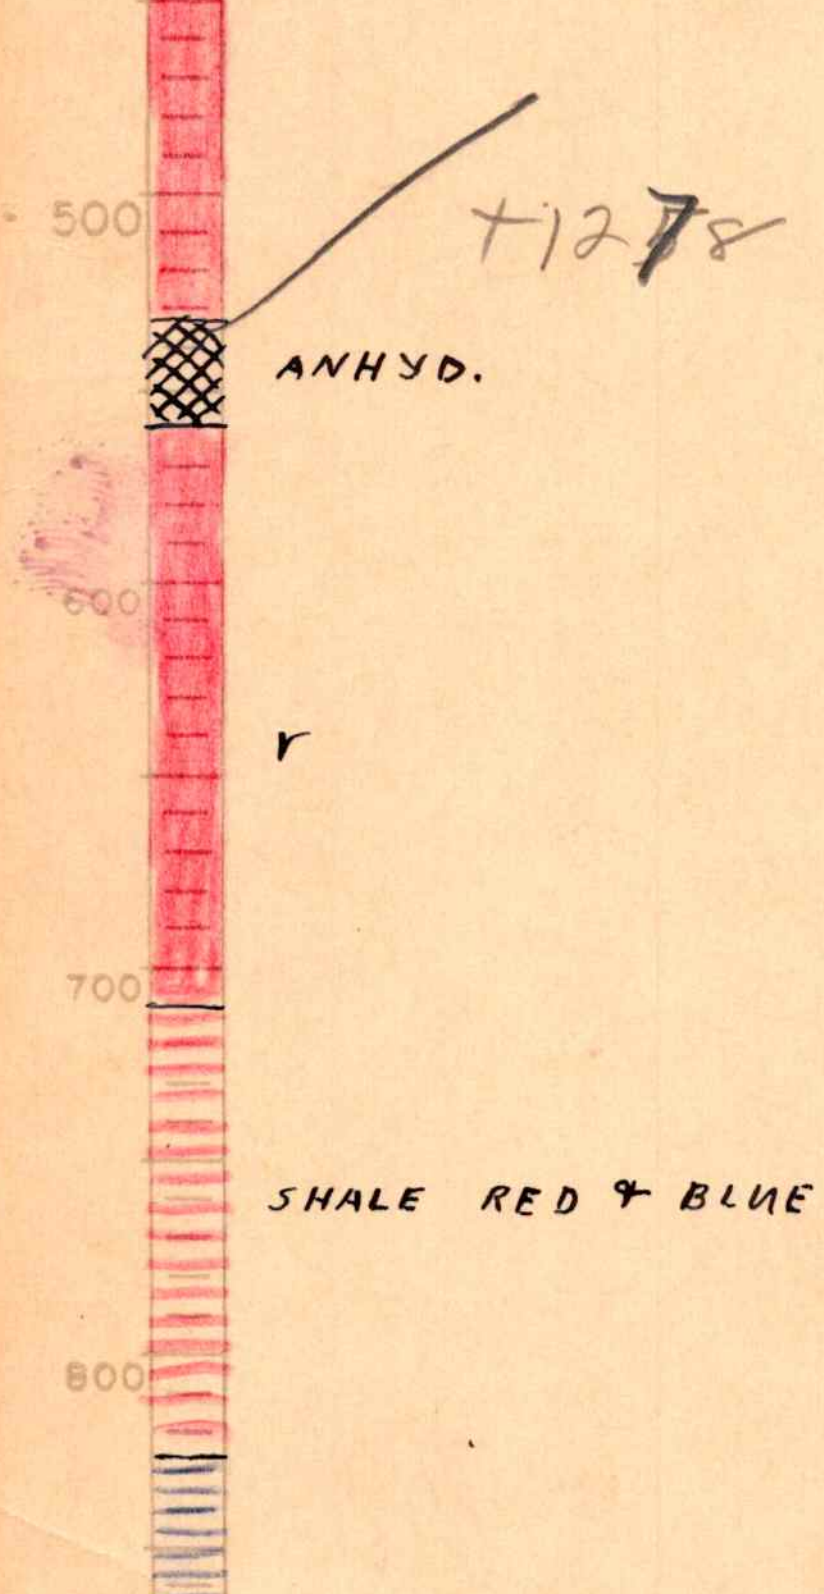
500
+1278
ANHYD.
600
r
700
SHALE RED & BLUE
800


900
1000
1100
1200

X

SALT + SHALE


1300
1400
X
1500
1600


1700
1800
1900
2000


2100
2200
2300


2400
2500
2600
X
2700
2800


X
2900
3000
3100
3200


OV
3300
3400
3500
3600

~~1500~~

-1480

LIME, SHALE, SAND.

sticky

TOP LANSING 3416'


3800
3900
4000

-1910

~~-1930~~

1600

TOP MARMATON 3720'

X

TOP MISSIPPIAN 3735' -1925

TOP CHERTY CONG. 3735'

ΔΔ CHAT.

TOP KINDER HOOK 3772

CORE #1. 3/5 REC.

CHERT DULL GREY.

SHALE RED + GREEN.

CORE #2. 12/12 REC.

SHALE GREEN.

SHALE GREEN SDY PYRITIC.

CORE #3. 4/6 REC.

SHALE GREEN PYRITIC.

SAND VERY TIGHT. SSO. 38½-39'

LIME TAN.

TOP SAND

CORE #4 6' REC.

L.S. GREY TO WHT MX W/SSO -2046

L.S. CX SDY W/SSO.

CHERT WHT DENSE

SAND G.X. W/SO.

L.S. EX. W/SO.

S.S. W/FSO. TOP VIOLA 3856'

GREY CORE #5. 2/2 REC.

L.S. W/SO. D.F. CORR. 3859=57'

L.S. CABLE TOOLS

CORE #1. 1/2 REC. L.S. 3859'

WHT CORE #2. NO RECORD.

COARSE CRYST. SDY SFT WTR.

COARSE CRYSTALS. NO SHOW.

L.S. CORE #3. 3/3 REC.

COARSE CRYST. FOSS. NO SHOW.

CORE #4. 1/1 REC.

SDY LIME 3865'

CORE #5. 3/3 REC. LIME 3868'

CORE #6. 3/3 REC. SDY LIME 3871'

CORE #7. 3/3 REC. SDY LIME 3874'

DRILLED LIME CHERT.

ROTARY TOOLS.

SAND + CHERT

2100
2200
2300
2400

LIME & CHERT.
SIMPSON SAND.
CORE #1. 9" 2/12½ REC.
LIME WHT. TO GREY EX NO SHOW
DRILLED.
SIMPSON TOP 3975'
CORE # 2. 9½/15 REC.
SHALEY GREEN W/ LS INCLUSIONS.
SHALE GREEN
SAND FINE. NO SHOW.
CORE #3. 10/11 REC.
SAND FINE W/PHOSPHATE INCLUSIONS
NO SHOW
SHALE.
SHALE & LIME. TOP SIL. 4044'
CORE #4. 6/11 REC.
DOLO. [illegible] POR.
DOLO. DENSE, NO SH OIL.
CORES SH LIME POR STRONG SULPHUR
WTR SMELL
BRKN LIME.

T.D. 4060'

MISENER SAND TOP	3835'
VIOLA LIME TOP	3854'
SIMPSON SAND TOP	3975'
SILICEOUS LIME	4044-60'








3700
3800
3900
4000