I-6I

STATE	COMPANY Hellar Drlg Co
COUNTY Stafford	FARM Russell · WELL NO. 1
BLOCK	SURVEY
SEC. 33	SESESW
T. 24 · R. 13	TOTAL DEPTH 4260
	COMMENCED
	COMPLETED 1/8/60
	REMARKS EL
ALTITUDE 1943	
PRODUCTION D&A	

CASING RECORD

DST 3880-4030/90"
30' m 60' SW BHP 515

SHOT · QUARTS · BETWEEN

Kraftbilt 186-B ROSS-MARTIN CO. TULSA 1, OKLAHOMA · PRINTED IN U.S.A.

Std. Cline 1/18/61

Unwashed samps — would be good if not so d— dirty

3000
3100
30-215-22a
3200
3300

Samps Start @ 3400

Unwashed cut samps.

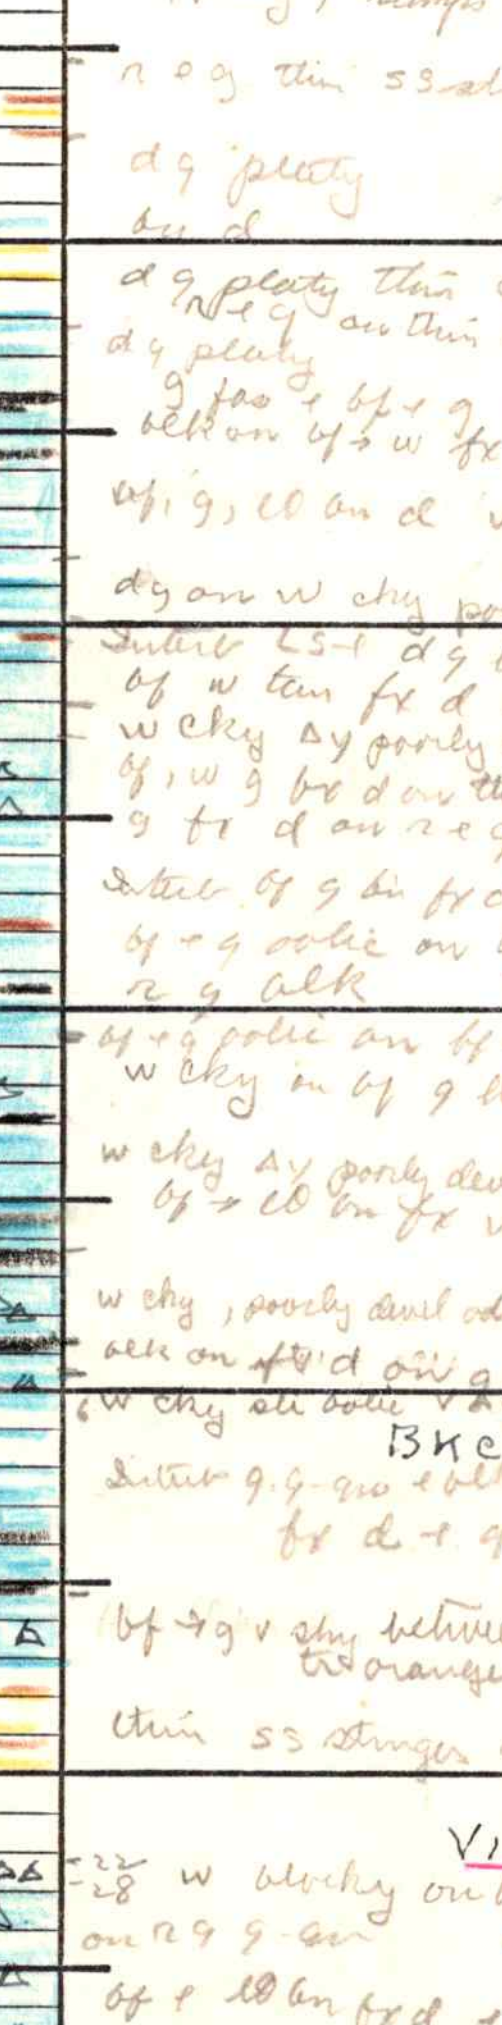

3400

bf → w suc + cky
alk on g d on g-g-gn
H → w cky intbd g + bf fxd slunffer
Δ y in mid
-56 blk on g + tan fxd an g-g-gn thin
bf → w cky an tan dg + blk — Heeb 3456, Leav 3460, Tor 3470
bf → g fxd
ss stngr
thin g d LS — Doug 3492
dg platy, samps recur badly
r e g thin ss stngr
dg platy — Brown Lime 3595
3600
dg platy thin calc ss stngrs — Lans 3619
r e g an thin bn fxd
dg platy
g fas + bf + g fthy
blk on bf → w fxd + cky, Δy
bf, g, lt bn d w cky stks
dg on w cky poorly devel ooli
3700
Intbd LS + dg little
bf w tan fxd soft cky stks
w cky Δy poorly devel oolic stks
bf, w g fxd an thick cky vΔy on
g fxd on r e g
Intbd bf g bn fxd + soft cky on r e g
bf + g oolic on bf fxd + soft cky
r e g alk
3800
bf + g oolic on bf → lt bn fxd
w cky on bf g lt bn fxd Δy
w cky Δy poorly devel oolic stks on
bf → lt bn fx v d, thin g-gn sh stngr
w cky, poorly devel oolic stks Δy between
blk on bf d on g gr — bf + lt bn fxd
3900
w cky sli oolic vΔy on bf → tan fxd — Bkc 3906
Intbd g-g-gn + blk sh + bf → lt bn fx d + g dky LS on blk
bf → g v shy between bf + lt bn fxd, tr orange Δ
75
M
thin ss stngrs in r gg-gn muddy
4000
Viola 4022
V 26
-22 -28 w blocky on bf → w mx cy
on r g g-gn — samps v dirty, hard to tell much about LS
bf + lt bn fxd + soft cky, w blocky Δ
-lt g → w fxd cky stks much wΔ
w cky much wΔ
4100
w bf + lt g fx vd, much wΔ
w cky on bf fxd + soft cky vΔy
-36-38 g-g-gn sh
bf → w fxvd + soft cky thin md @ base, Δy
60
S
Simp. 4160
Intbd dg sh, v sdy LS + v calc ss
dg on thin f. ss
4200
Arb. 4212? or 4252?
12
A
R
D
-12 bf fxd
dg + g-gn
bf + g gran sli sdy, tr lt g ool Δ, megg por
g-g-gn thin dolt + phosp ss stngrs
bf → tan fxd, cr mx + c gran, little vug por, tr wΔ — questionable sptz poss cav c?

TD 4260

3x00
860

Note: dolt + phosp ss stringers in interval from 4240-52 certainly look like Simp. Unwashed cut makes difficulty in determining much about texture of limestones + dolomites