STATE Kansas	COMPANY Isern Bros
COUNTY Stafford	FARM Abbott — WELL NO. 1
BLOCK	SURVEY
SEC. 25	4219 TOTAL DEPTH
T. 24 S R. 14 W	
	COMMENCED
	COMPLETED
ALTITUDE 1942	REMARKS SE-SE-NW
PRODUCTION	

CASING RECORD

Heeb 3447 — A - 4216
Brown Li 3590
Ls 3621
Sl. por. & stn
3747-55

SHOT — QUARTS — BETWEEN

FORM 186 - In stock and for sale by Mid-West Prtg. Co., Tulsa

3447 / 1942 / 1505


3447 / 1942 / 1505

3621 / 1942 / 1679 Abbott

3609 / 1948 / 1661 Harter

3583 / 1938 / 1645 Copeland

Samples Start 3000

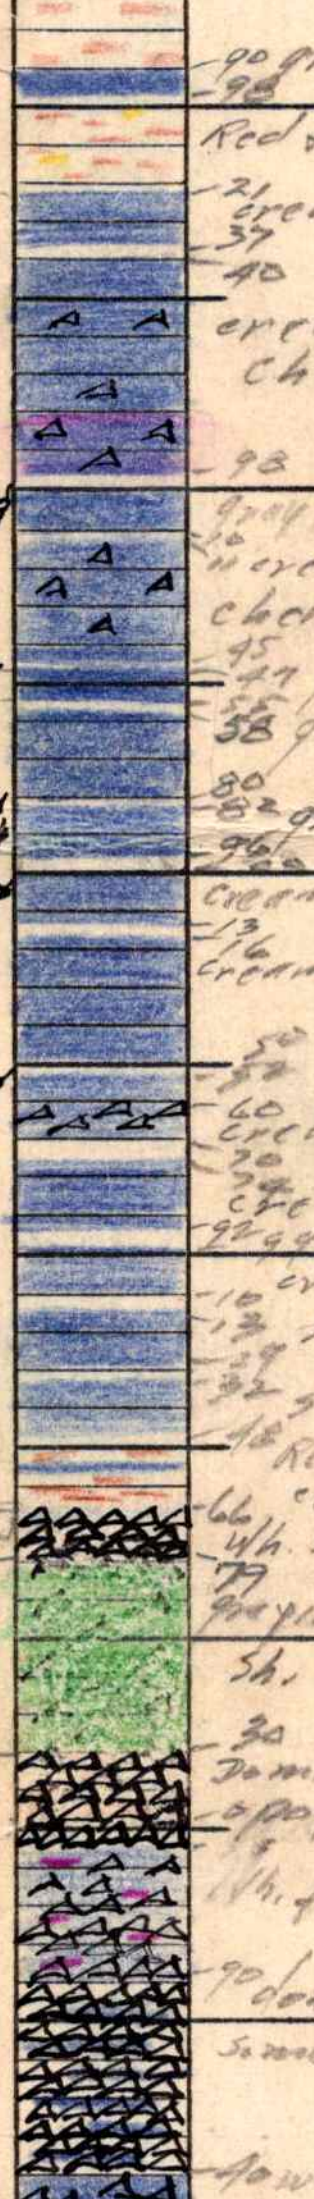

- 3000 gray f.xln. lst.
- 33-43 cream to gray, f.xln. fossilif. lst.
- 85-90 same
- 15 Rd & gr. sdy sh.
- 25 gray, f.xln. fusulinidal lst.
- 42 Rd & gr. sandy sh.

Topeka 3155

- 55 cream to gray, f.xln. fossilif. lst.
- 80-81 gray, f.xln. sli. cherty lst.
- 10 cream f.xln. cherty lst.
- 50-52 gray shaley to f. gran. fossilif. lst. cherty in part
- cream, dse. to f.xln. cherty lst.
- 90-95 cream to gray, dse. to f.xln. lst. cherty in part
- 36-40 gray f.xln. fossilif. lst. scat. pin-point porosity, fusulinids
- 80 20 gray cream dse. to f.xln. lst. fusulinids
- 44 black sh.
- 46 cream to gray, f.xln. lst.
- 84-92 cream, dse. to f.xln. lst.
- 02-15 same
- 23 Red & gray, slightly sandy sh.
- 90 gray-buff. f.xln. lst.
- 98 Red & grey, sli. sdy. sh.

Lansing 3621

- 21 cream to grey, dse. to f.xln. fossilif. lst.
- 37-40 cream, dse. to f.xln. sli. cherty lst.
- 98 gray, f.xln. sli. por. faintly ool. lst.
- 40 cream to grey, dse. to f.xln. cherty lst.
- 45-47 gray, por. ooc. dead oil st. lst.
- 55-58 gray, dse. to f.xln. lst.
- 80-82 gray, [illegible] ooc. lst.
- 96 cream, f.xln. lst., scat. ooc. por.
- 13 cream, dse. to f.xln. lst.
- 50-52 cream, f.xln. por. ooc. lst.
- 60 cream to grey, dse. cherty lst.
- 78-90 cream, dse. to f.xln. lst.
- 92 gray [illegible] dse. lst.
- 10 cream, [illegible]
- 13 same
- 32 same

Mississippian (?) 3966

- 46 Red & grey sh. with thin beds
- 66 cream [illegible] opaque chert

Kinderhook Sh. 3979

- 79 wh. smooth [illegible]
- greyish-green & greenish-grey sh.

Viola 4030

- 30 Dominantly wh. smooth, opaque chert.
- wh. f. to med. xln. cherty dolo. lst.
- 90 dom. wh. sm. op. chert
- same grey, f.xln. lst.
- few wh. to grey f.xln. cherty lst.
- 55 wh. to grey dse. xln. crinoidal lst. cherty in part

Simpson 4172

- 72 green sh. with interbed cream dse. sandy lst.
- 85 grey med. to f. gr. ang. to rounded, dolomitic sst. inter-bedded with green sh.

Arbuckle 4216

- 16 grey f. to co. xln. sl. sandy dolo. occ. & vuggy por. in part, oolitic chert.

T.D. 4219