STATE Kansas

COUNTY Reno

BLOCK

SEC. 2

T. 24s R. 5w

COMPANY Plains Expl.

FARM Eales WELL NO. 1

SURVEY

TOTAL DEPTH 3964

III

COMMENCED

COMPLETED

REMARKS NE-NE-SW

ALTITUDE 1493

PRODUCTION D&A

CASING RECORD

FK 900

SHOT QUARTS BETWEEN

FORM 186 - In stock and for sale by Mid-West Prtg. Co., Tulsa

Samples Start 2000'

g. f.
g.-bf. f. gran. dolom. lst
g. f. g. silty, micac. sst
g. f.

Topeka 2120

c.-g. f. fos. ∆ y in part
∆ y in part.
c.-bf. f. sli. ∆ y
c.-g. f.
g. f.
c.-g. f. fos.
c.-g. f. fos. ∆ y at top
g. f. fos. ∆.
c.-g. f. fos. sli. ∆ y
g.-bf. f. with inter-bedded dk. sh.
g. f. g. sdy. micac. tight ss
g. f. g. sdy. micac. por. sst.
g. f.

Lansing 2682

c.-g. bf. f. d. f. faintly oolitic
82 c.-g. bf. f.
c.-g. bf. f. ∆ y in part
c.-g. d.-f.
c.-g. d.-f. ∆ y
g. por. ool. lst.
g. t. f. brown, porous, finely oocastic lst.
bf. to brn. d.-f.
c.-g. d.-f.
c.-g. bf. f. ∆ y, scat. ooc. por
g.-bf. f. ∆ y in part
c.-g. bf. f. ∆ y
bf. to brn. f.
c.-g. d.-f.
blk. sh.
g.-bf. f. por. & ooc. in part
dk. g. ool.
g.-bf. f. brn. f.
g. bf. to brn. f.
c.-g. d.-f. ool.
c.-g. f.
dk. g. f. to blk. sh.
c.-g. d.-f.
c.-g. bf. f.
brn. f.
g. sh.

Mississippian 3368

68 Wh. to cream, med. to co. xln. crinoidal lst. ∆ y in part
Predominantly wh. chalky ∆ gray, finely sucrose dolo. in part
wh. f. to co. xln. ∆ y lst. with interval bf. suc. dolo
predominantly g.-bf. f.-xln. lst

Kinderhook Sh. 3607

greyish-green & dk. greenish gray sh.
Spore bearing in part

Misener sst. 3732

gray f. to co. g. sub. to rd. pyritic phosphatic sst.

Hunton 3733

buff f. suc. sdy. dolo. almost 50% sand in part.

Maquoketa 3758

buff, g. grn. silty siliceous graptolitic dolo. with inter-bedded green dolomitic sh.

Viola 3826

wh. to gray, co. xln. to f. The mbr. dolomite, on white co. xln. crinoidal lst.
gray f. to co. sub. to rd. frosted dolomitic in streaks
olive-green waxy sh.
interbedded with f. to co. grained enlarged sst.

Simpson 3848

g. bf. med. to co. xln. dol. oolitic ∆

Arbuckle 3931
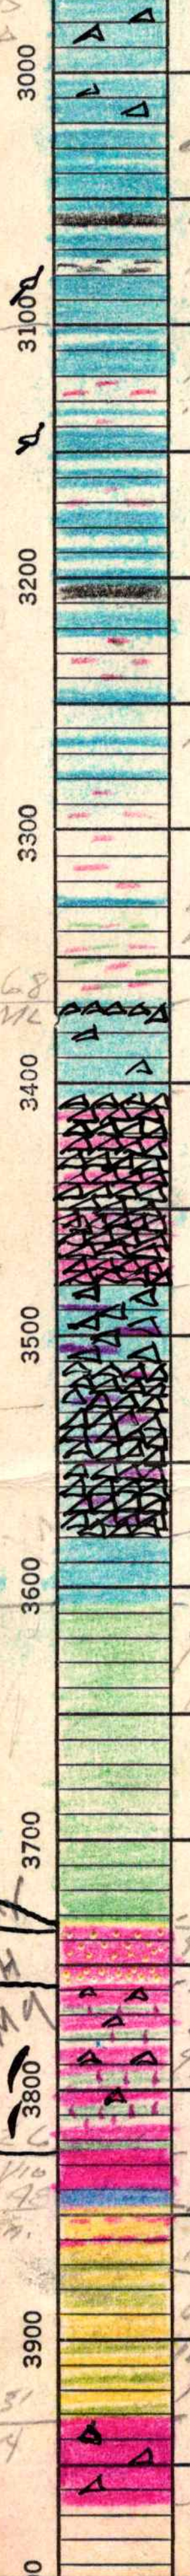
64 T.D.
D&A