9-73

STATE Kansas

COMPANY Ferrier

COUNTY Hodgeman

FARM Fischer

WELL NO. 1

BLOCK

SURVEY

SEC. 35

4905

TOTAL DEPTH

T. 24S

R. 24W

NE-NE-NE

COMMENCED

COMPLETED

REMARKS

ALTITUDE 2472 KB

Elog!

PRODUCTION D&A.

CASING RECORD

SHOT QUARTS BETWEEN

FORM 186 - In stock and for sale by Ross-Martin Co., Tulsa

100

200

300

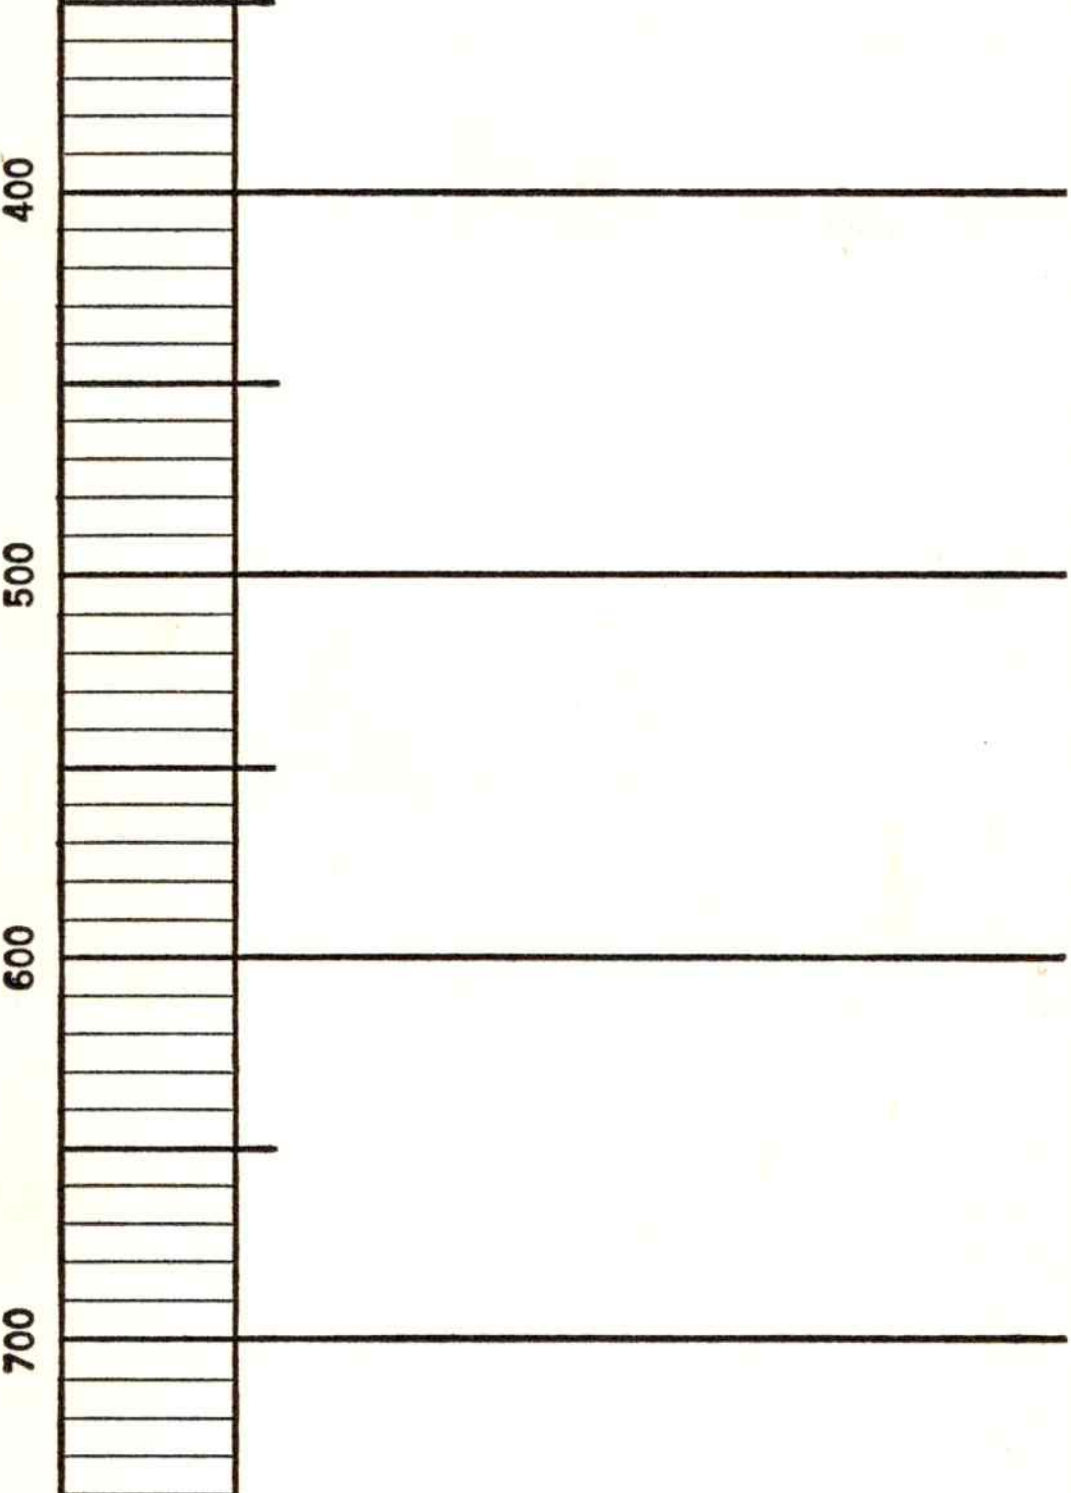

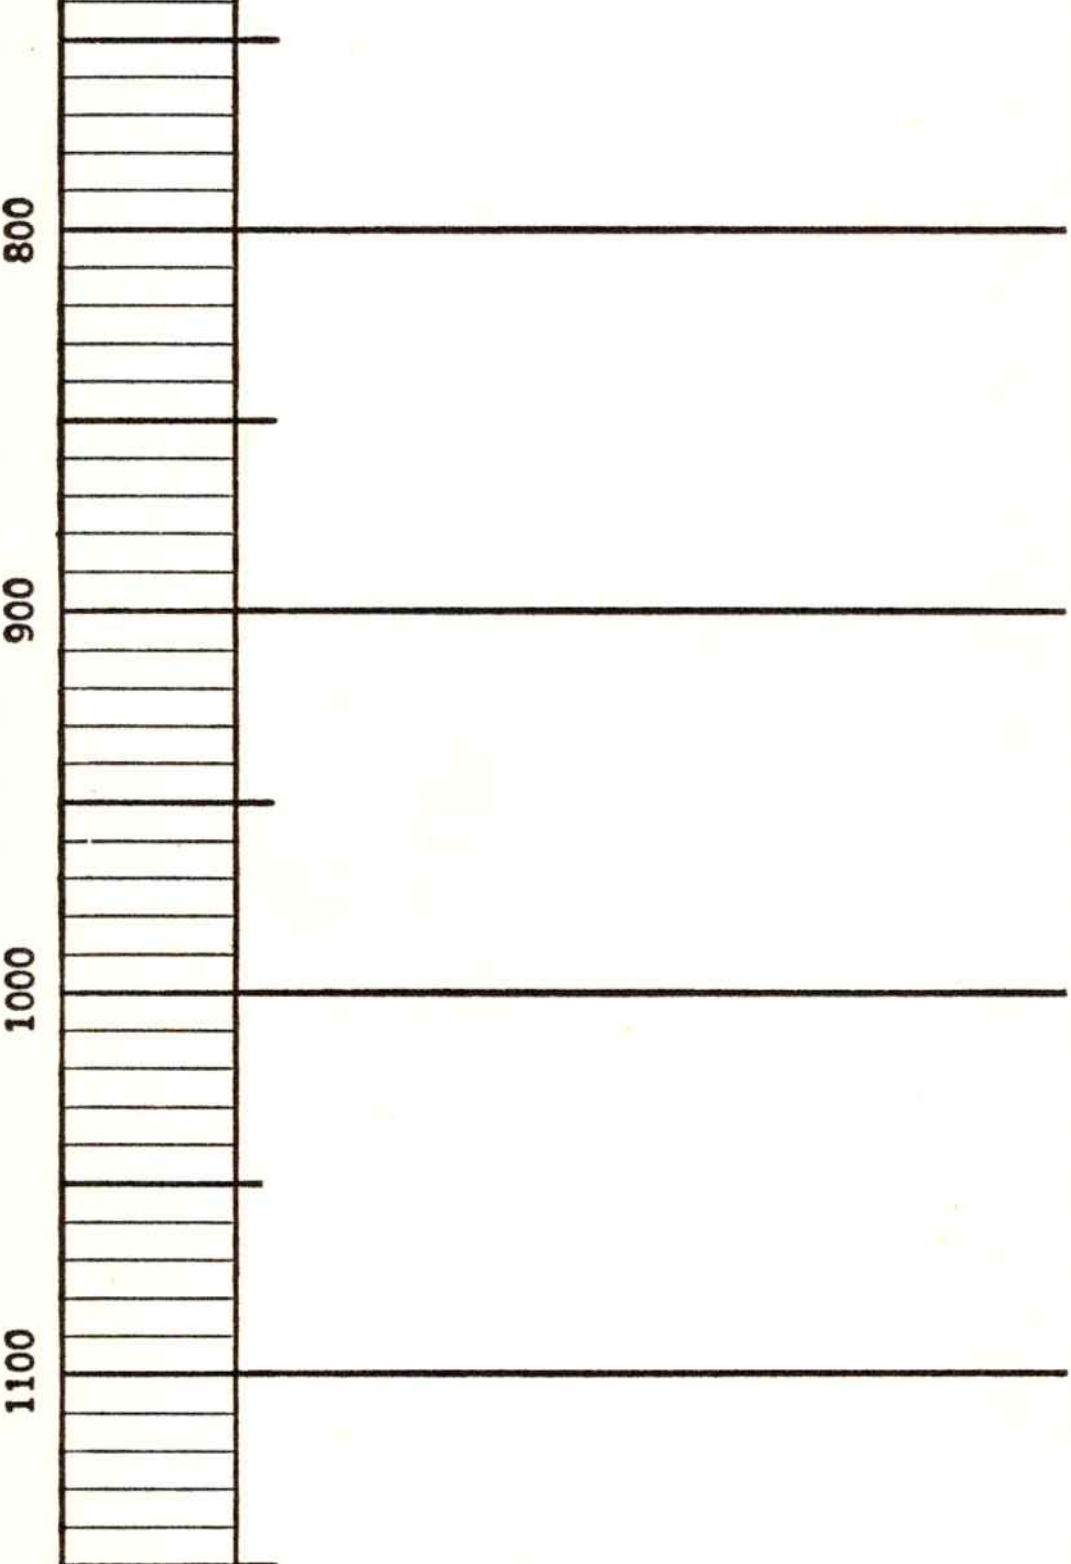

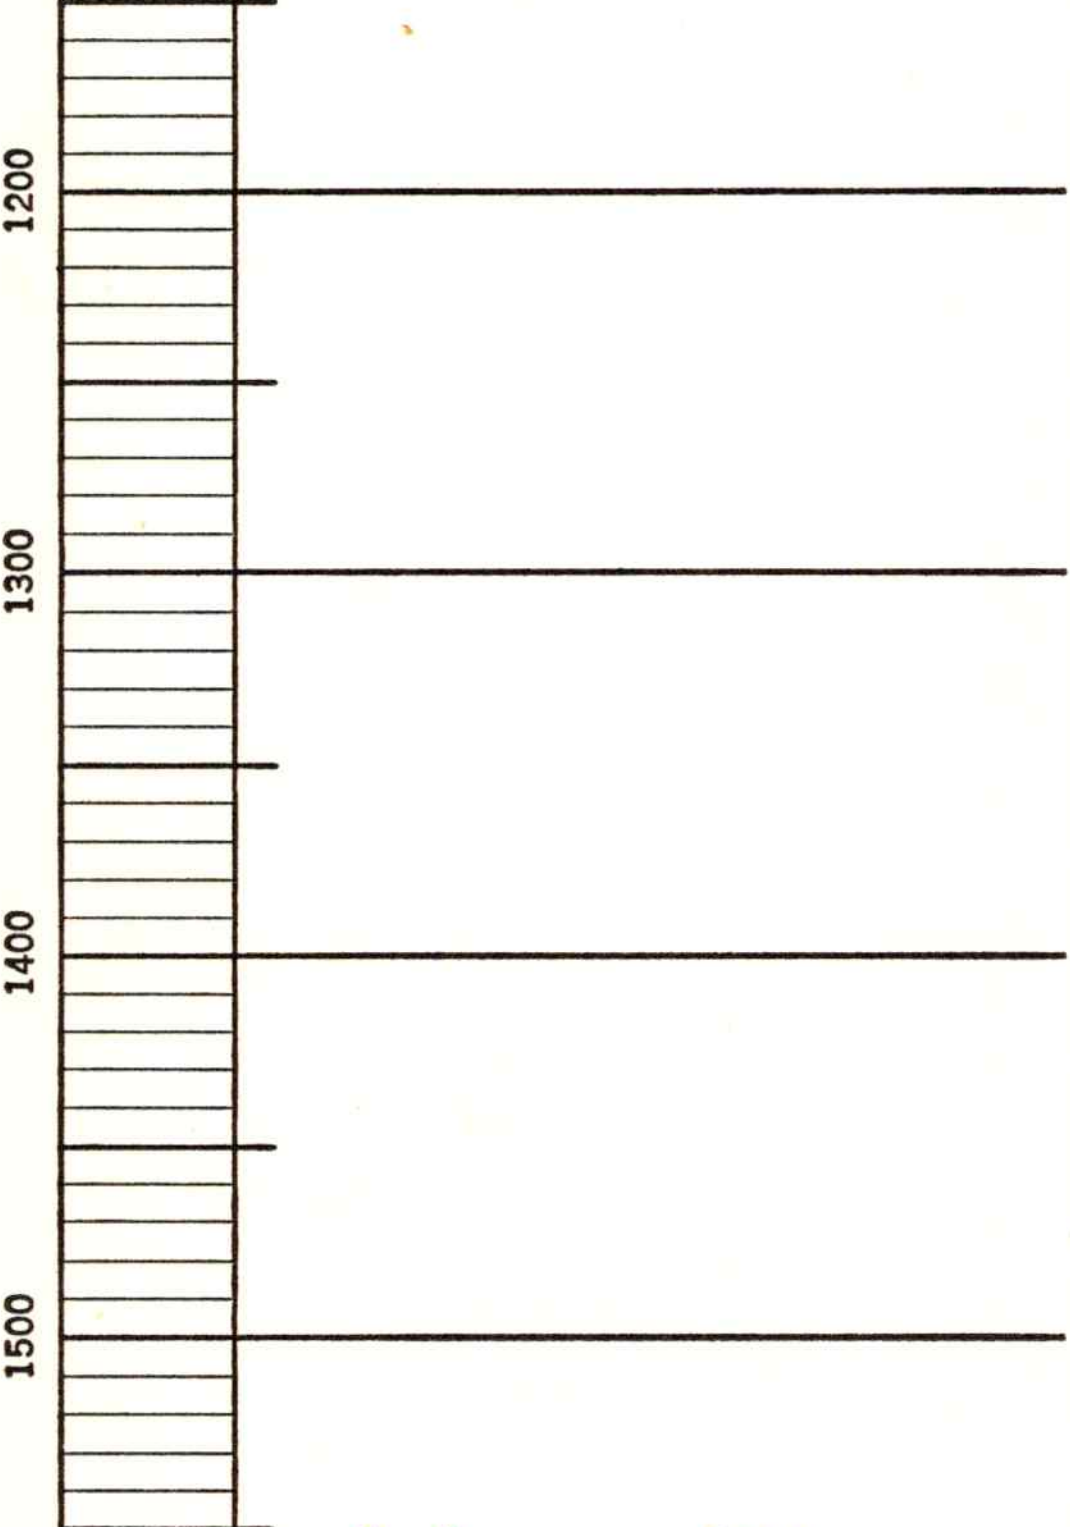

Arbyd 1592

1600

1700

1800

1900

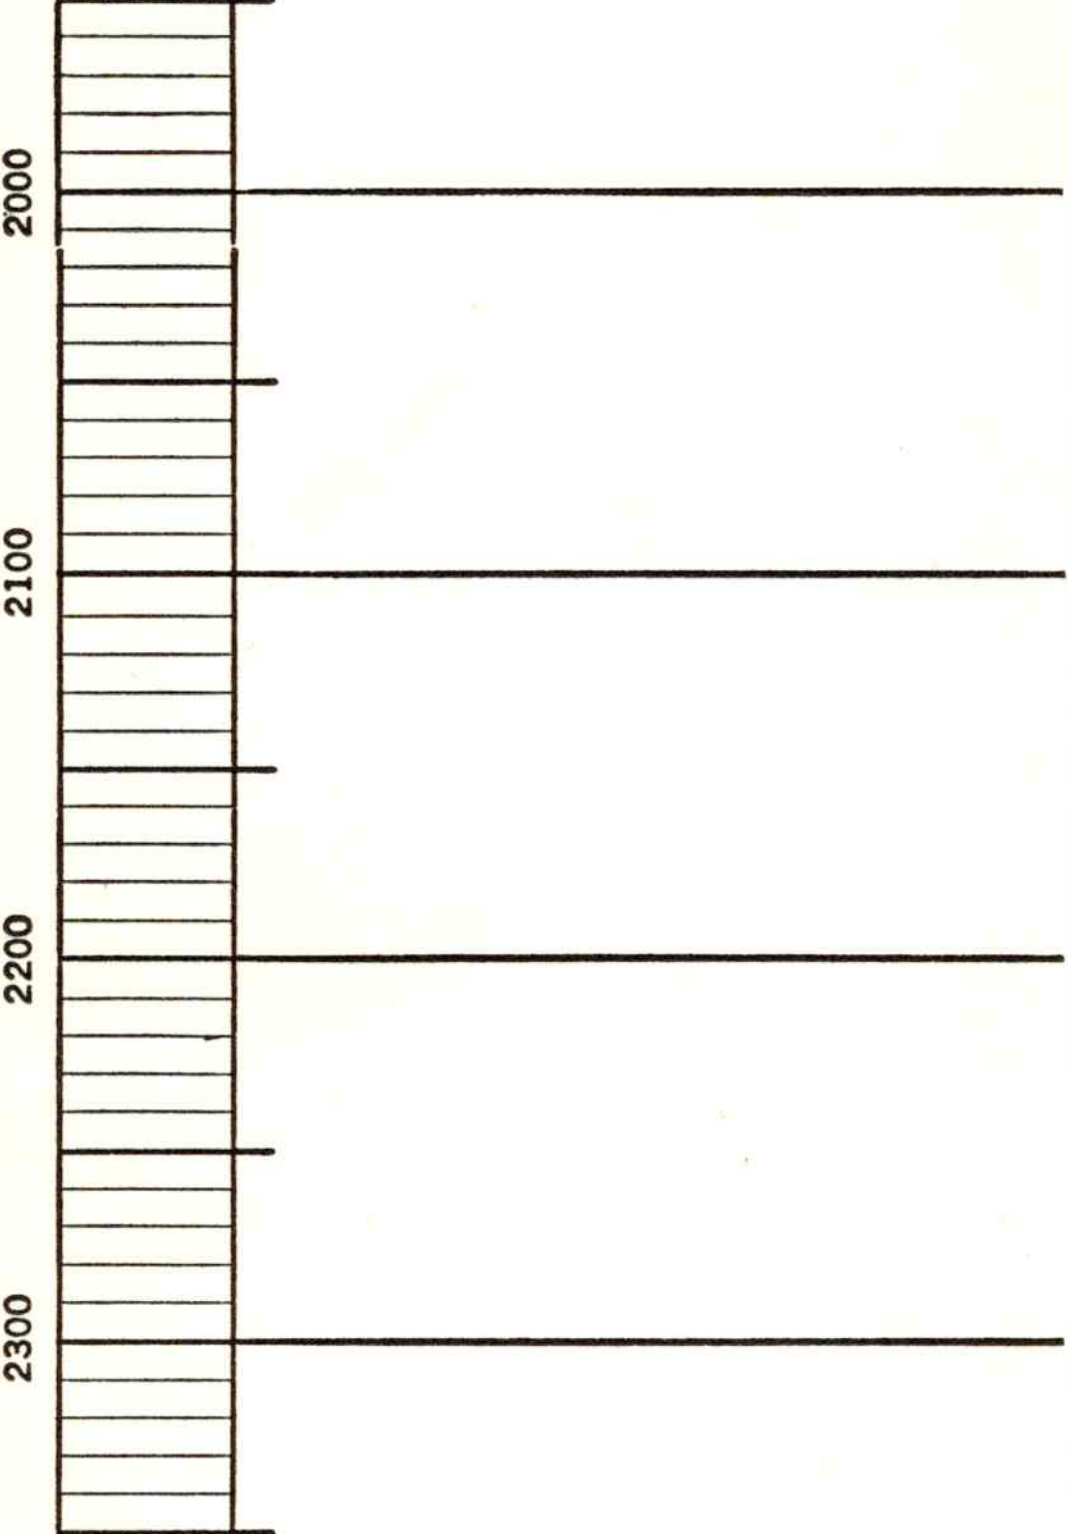



Sples Start @ 2500'

wh anhydrite

bf, mot suc sli sy dolo

v, col, anhydritic sh

lt, g to bf, suc, to f xln sy dolo

v col sdy sh

bf, suc to f xln dolo

v col, sli sdy anhydritic sh

g-bf, mottled suc to f xln. dolo. Δy in part

v col anhydritic sh

-74

Ft. Riley 2674

g-bf, suc to f xln dolo

Δy in part

v, col, gry sh

lt, g to bf dol fos



dolomitic lst

Base Florence 2808

skip

a&b lt, g, dull, op, fusulinids

88' fn lst, as above

Wreford 2840

gy lt, fos lst

bf lt, xtn lst re b, co sh

lt g to dk lt, fos profusely, sy

v, co sh

c-lt dk shly st dy lst

lt, g, grt.

v, co sh

g, dse

lst g, lt fos

v, co sh

c g lt fos

lt, g, lt fac ay lst

c lt, lt fos lst, fusulinids,

lt dse lst in r.b. sh

73

c, tan, lt fos, lst

dk, g, to blk sh



thin bedded c.g. dt. xln Lst & v. calc Sh

dk. g. lmy Sh

Neva 3073

Lt. g to tn, dns, fos. Lst

"

"

"

c.g., dns, fos Lst

Thin beds lt. g to tn, dns Lst & v. calc Sh

Lt. g, dns, fos, sl Lst
v. calc Sh
c.g. [illegible]

"

"

"

"

v. calc Sh, sdy micac. g
g, dk, dk, xln, sdy Sh, Lst

Sh, sdy Sh as above

-32 **Wabaunsee 3432**

l. g to tn, dt, the more or less fossil. Lst



with [illegible] v. cal sh

v. cal sh
gy, lt. gy. xln - slty broken lst

lt. g to lt. gy. f. fos lst.

v. cal, ss, sdy, lmy sh-
(tr. [illegible]) sh
c- lt. gy. f. fos lst

thin beds c lt. gy. f. xln lst
w/ v. cal. sh
lt. g. gy. f. fos ss. lt. gy lst

TD 3688

wh, g & lt. gy. f. fos more or less sdy lst

dk. g to blk sh on lt. gy. f. xln lst
v. cal, lmy sh
lt. g, gy to lithographic lst



tn-g, dns, dy Lst

dk g Sh

lt-g dns, dy Lst

blk Sh on ft, dns, xln Lst

Vi col, lmy Sh

Heeb Sh 4028

wh, g, fos, suc fos, xln [illegible]

Sdy [illegible] fos, dy, Sh

Toronto 4059

-28 blk Sh, [illegible] Lst
-36 g-bf, [illegible]
-39 Vi col. Sh - Lmy at base
-59 white tan, suc fos. xln
-74 fos, dy Sdy dolo Lst
Vi col, Sh, Sdy Sh with mixed-
[illegible] g to bf, [illegible] fos Lst

Ls 4129

-29 white bf, suc fos. xln, dy Sh
[illegible] Lst, ool ooc, near top
bf, dse Lst in dk g Sh
c, dse dy Lst
g, suc, Por ooc, dolo Lst,
c-bf, dse dy Lst in dk-g Sh

c, dns dy Lst
Vi col, Sh
P Pt ooc por in lt g to bf
P suc fos. Xln, por. ooc dy dolo Lst



[illegible] dse lst, m dk. g sh

scat p.p. & vuggy por in lt. g to off, suc to f.xln, dy sli dolo. lst

blk sh, cm [illegible] f.xln lst

v. calc sh

wht to [illegible] cm lt. dse lst

dk. g

wht to g [illegible]

dk g sh cm g off, off f.xln. lst

scat ooc & vuggy por in c. off, suc to f.xln. dy sli dolo lst

blk. sh

lt. g, suc, por ooc dy sli dolo lst

lt. g, off, dy lst

blk sh, cm off to brn dse lst

lt. g off, dy lst. ooc & p.p. por

dk. g. to blk sh, ooc off, [illegible]

wht lt. g off dy lst

BKC 4549

49

dk g [illegible] to blk

mica. sh

lt. g to off dse, dy lst

dk g. to blk, [illegible] sh

off dse lst

lt. g to off dse dy lst. fairly ool in [illegible]

blk sh, cm lt dse lst.



Vicosh

[illegible] dse, Δy lst

[illegible] sh, [illegible] to brn, dse lst

Vico [illegible]

[illegible] dse Δy lst

97 [illegible] to blk [illegible]

Ft. Scott 4697

lt.g. to bf, dd, fos, sl Δy tight lst

blk sh [illegible] dse Δy lst

[illegible] dse. thin bedded lst

[illegible] to [illegible] gry sh

[illegible]

[illegible] dse Δy lst

77

PBC 4777

Vico?, Δ in [illegible]

Miss 4820

20

wh, op. fos Δ in wh + lt.g, dse, fine + med xln fos lst, sucrose + slightly dolomitic in part

T.D. ~~4893~~ 4905

No Tests

264