
FORM NO. 796 - In stock and for sale by Mid-West Prtg. Co., Tulsa

STATE	COUNTY Edwards
BLOCK	SURVEY
SEC. 5	
TWP. 26 RGE. 18W	COMMENCED 5-17-43 COMPLETED 6-22-43
	T. D. 5085 TOOLS Rot.
	CASING RECORD CSESW
	LOGGED Aug 9 1944 BY W.A.V.
WELL NO. 1	REMARKS 4600-4700 From Standind
LEASE Miller	Remainder From K.G.S.
COMPANY Brod. + Gordon	
ELEV. 2190	
PROD. Dry	

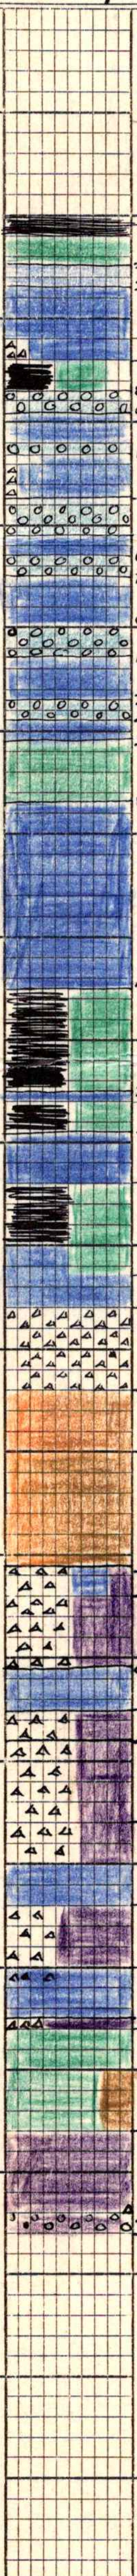

-52 Lansing 4052 / 2190 / -1862

Scout Tops

4100
Blk + Green Sh. — Miss 4748
22 Calcitic — Viola 4805
32 Dk. Brn Lithog — Simp 4971
Arb. 5059
60 Same + Δ
70 Black Green + Red
85
96
4200
17 Ls. Lithogr + Wh. Δ
38

4630 / 2190 / 2440 — 4755 / 2190 / 2565

68
72
Ls. Lithogr + Oolitic
00
4300
14 Ls. Lithogr Brown
35
42 Ls.
55 Hard Green Sh. — Marmaton 4355 / 2190 / -2165
86
4400
Ls. Dark Brown FXl.
75 Green + Black Sh.
4500
24 Ls. Brn Lithogr
30 Shale Blk + Green
46 Ls. Pale Brown Lithogr
70 Shale Black + Green
4600
Penn. Ls. + Dark Shale
15 Ls. Pale Brown + Lithogr
30 - - - - - - - Fern Glen
Δ Wh. Opq.
Also GRAY Gray + Bluish Grey
70 - - - - - - - Misener
Ss ~~Fine Even Grain~~ Impure + Uneven Grain
OILStain Black Minerals
Small Rounded Qtz Grains
4700
Ss. Even Grained Clusters
Ss. White Med. Grained
Greenish Cast + Qtz. Clusters.
Base quartzitic Opalescent — Viola
55 Ls. CXL. Dol. Gran. + Δ pale semi Opq.
Dol. Gran. White with Δ
Δ Pale Bluish Semi Opq.
4800
03 Ls. CXL. Spotted Wh. + Brown — Zone B?
23 Dol. Gran. Wh. Δ Dull Wh. Opq.
Dol. FXL Brn. Δ wh Opq. + Trip
80 Dol. Very Dk Brn. or Blk Gran + Smoky Δ
4900
00 Ls. CXL. Brn. + Wh. — Zone C or D?
20 Dol. Very Dk Brown or Blk. Smoky Δ
50 Ls. CXL. Pink Wh. Brn. + Grey — Simpson 4969 / -2779
75 80 Dol. FXL Pink + Δ spkld. + Trip.
Green Shale
5000
Also Impure Ss.
Sandy Shale Green — Arbuckle 5030 / 2190 / -2840
30 Dol. Wh. Brn. + PINK FXL
Oolitic Δ Oocastic Dol
80 T.D.
5100
Note Viola Zone B C + D
1200
or else if middle one is B
then B has Smoky Δ + C is thin