STATE Kan.

COMPANY Delta & Harbar

COUNTY Pratt

FARM Miller

WELL NO. 1

BLOCK

SURVEY

SEC. 25

T. 28

R. 12W

TOTAL DEPTH 4636



SW SW NE

COMMENCED

COMPLETED

REMARKS

ALTITUDE 1849

PRODUCTION D & A.

CASING RECORD

L-k.	3721	Arb.	4599 ~~4636~~
ML.	4192		
Khk	4294		
Vio.	4389		
Sn.	4489		

SHOT QUARTS BETWEEN

FORM 186 - In stock and for sale by Mid-West Prtg. Co., Tulsa

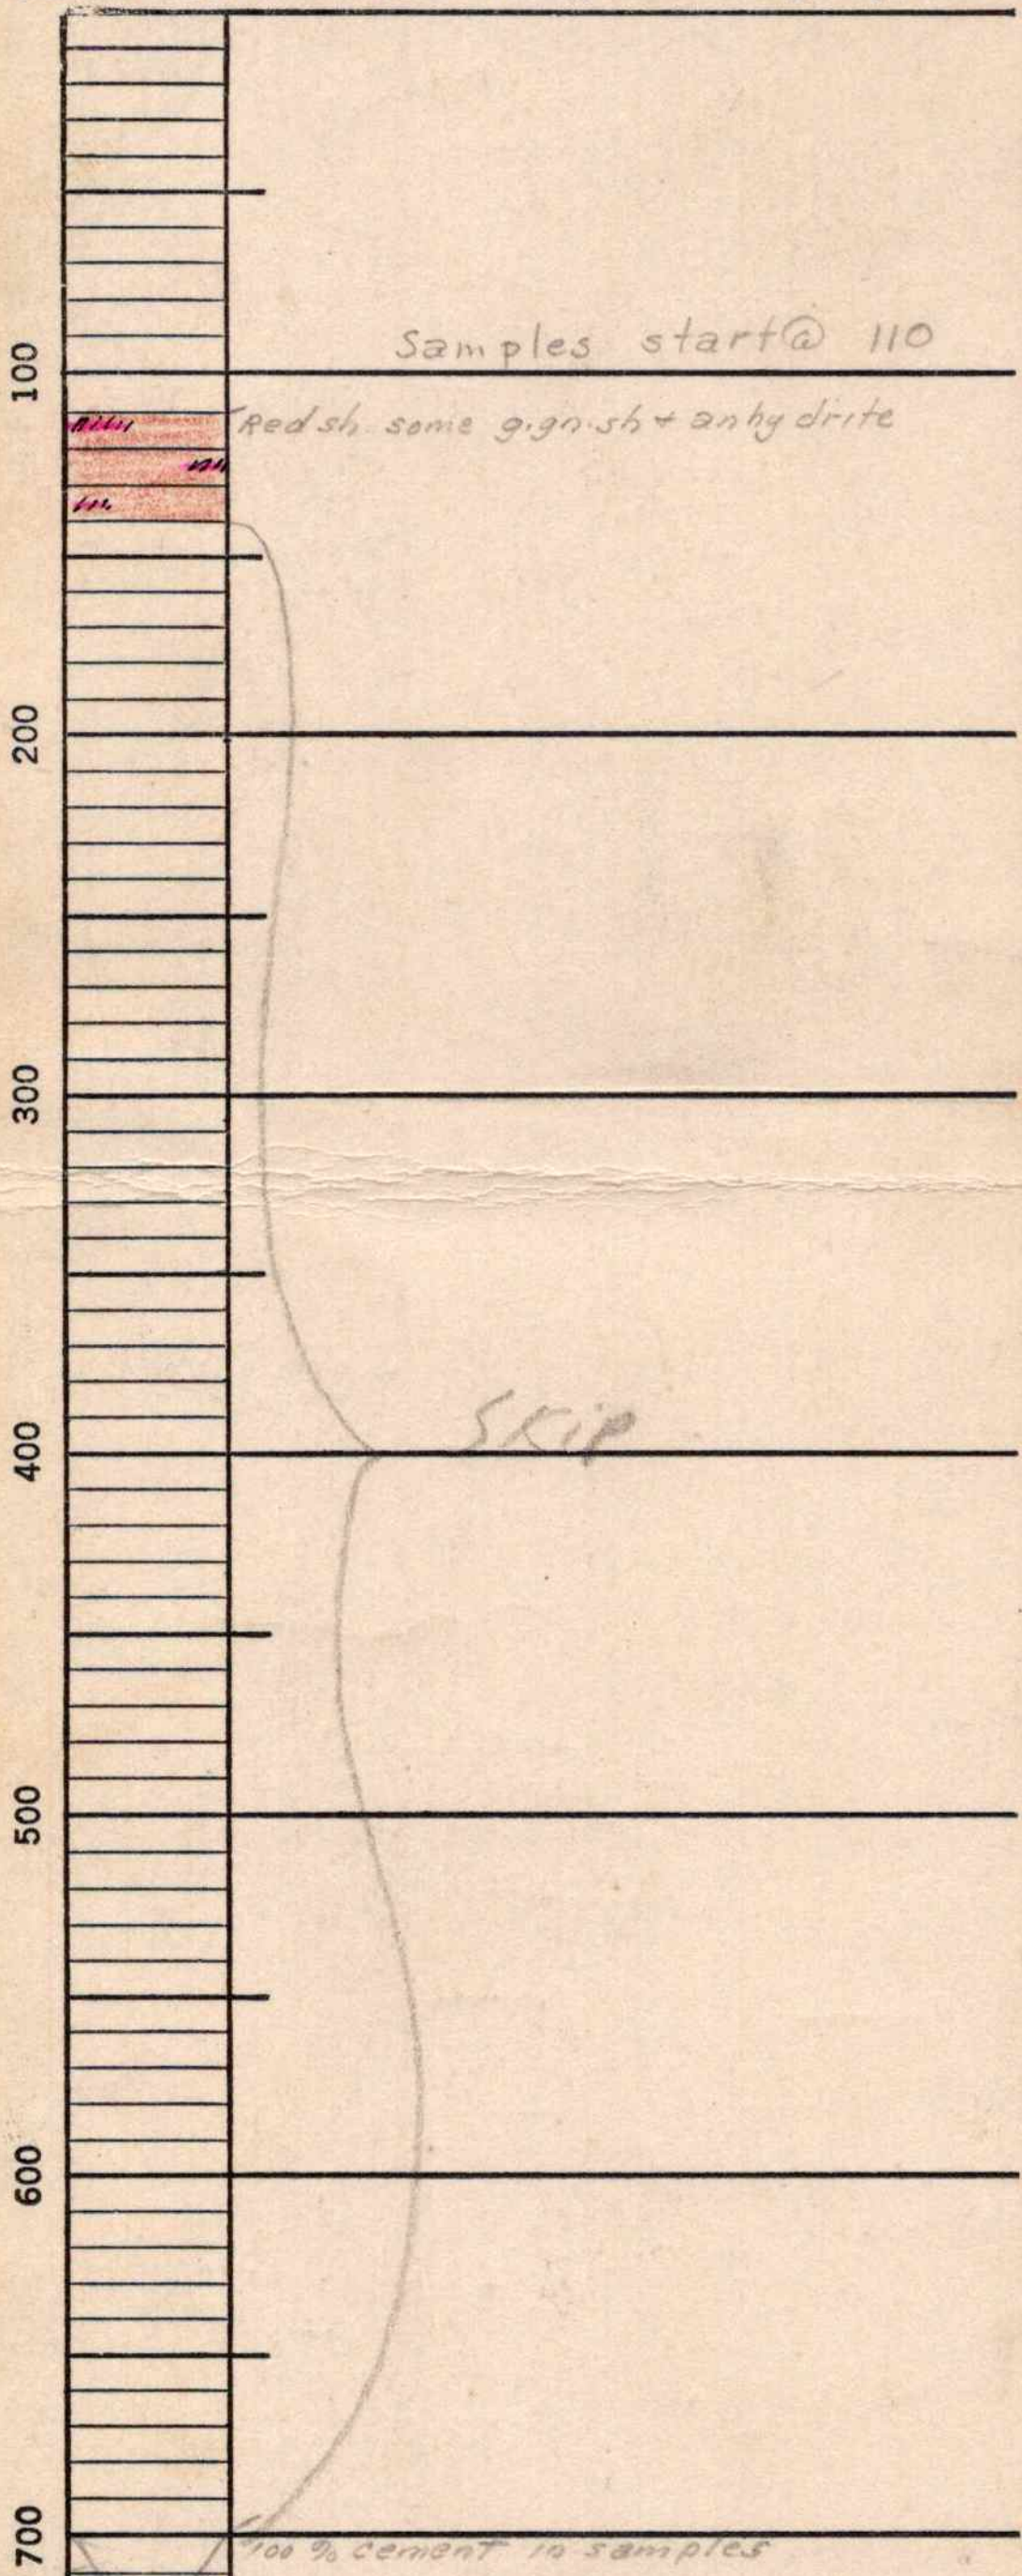

Samples start @ 110

Red sh. some g.gn.sh + anhydrite

Skip

100% cement in samples

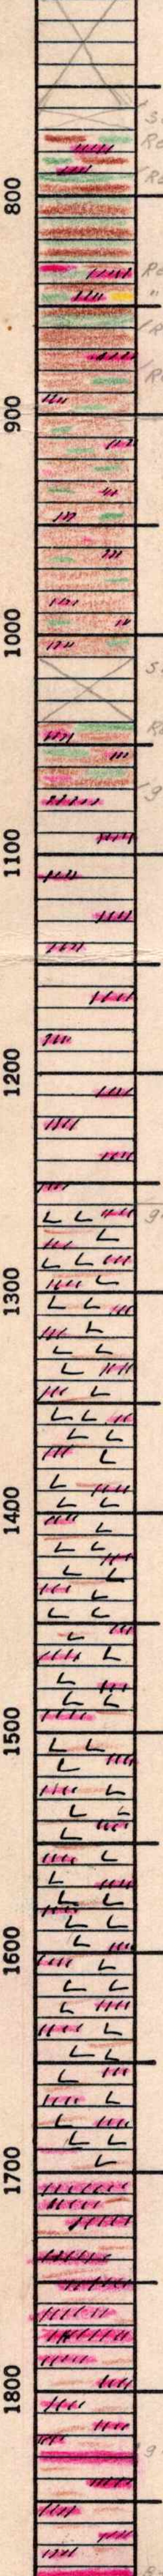

sample out of place.

Red sh. w/some g+gn. sh + gyp. { selenite + anhyd.

Red+gn. sh

Red+gn. sh. w/anhyd. + c. arg. d. dol.

" " " " " + some wh. fn. sd.

Red sh. w/anhyd.

Red+gn. sh w/anhyd.

SKIP

Red+gn. sh. w/anhyd.

g. sh. w/anhyd.

Wellington 1070

Wellington Salt 1260

g. sh, some red sh. anhyd. + halite casts

Base of Salt 1703

g. fn.-d-dol. w/selenite "eyes"

fn.-fnly suc. dol.

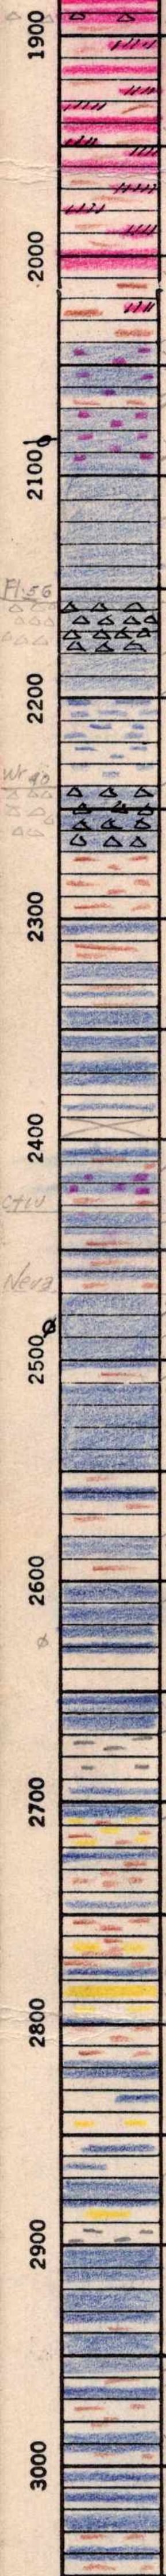

g. fn-fnly suc dol. △y.

bf-g. fnly suc dol.

g-bf. fn-fnly suc dol.

lt g. d. dol.

g fn. dol. w/ abdt crin.

g + bf. fn. xln-gran dol. lst poorly foss.

Ft. Riley 2070

g-bf fn xln-gran. dol. lst

same, poorly ⊸

c.g.d-fn lst

lt g. d. lst

Florence 2156

c.d-fn. fusil. ls. w/ fusil △

c.d-fn non-△y

c-g. fn foss. shy lst

c.d. △y lst **Wreford 2240**

c.d

c.d

c.d. faintly ⊸ in part

c.d-fn.

c.d-fn.

same

skip

c.d.

tan fnly suc. dol. lst.

Cottonw'd fusil zone 2433

c.d. lst w/ pcs. of fusil.

Neva 2470

c-pink. d.

c.d. fnly ø in part

c-pink d

c-wh. d-fn

c.bf fn-fnly suc.

c-g. d. foss.

same

c-g. d-fn. foss.

c-g. fnly ø

c-g. d-fn.

g. sh w/ blk

c-g. d-fn.

c.d

vg. sh. + vy. fn. tight sd.

c-g. d-fn. foss.

c-g. d.

vg. sh + g. fn. sd.

c.d-fn.

g. fn-med. micac. sd.

lt. g. d-fn.

c-g. d

" "

g. fn tight sd. + sh.

c-g. d

c-g. d.

sh + fn-med. sd

g-blk sh.

c. d.

c-tan. d.

g. d-fn

c. bf. d-fn

g. bf. d-fn

c. d-fn.

c. d-fn.

c-lt. g. gn. d-fn.

c-tan. d-fn.

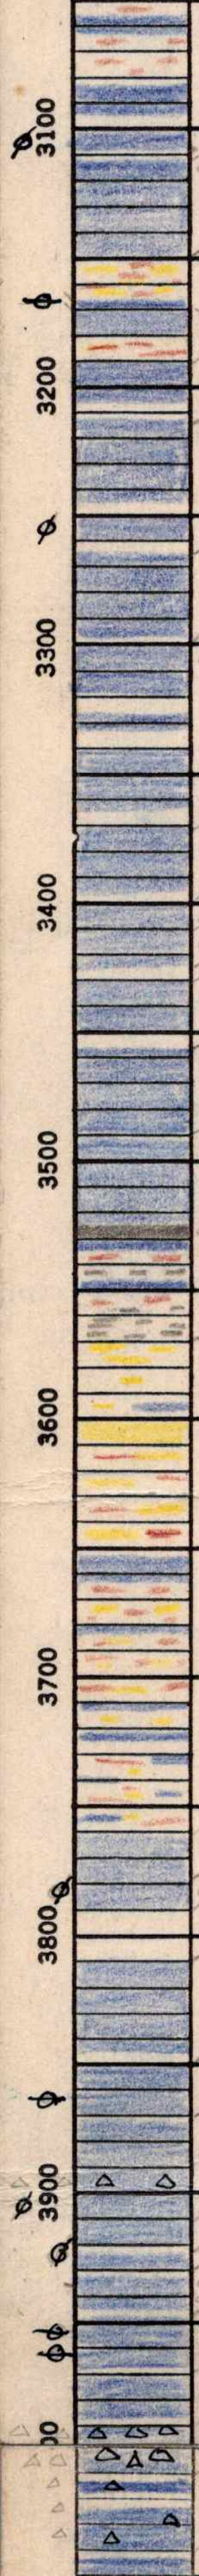

c.d-fn.

c-wh d-fn. poorly foss.

3100 ϕ
c.fn. poorly ⊖, sl ϕ
c.d-fn.

"/

vg. sh + fn g. sd.
ϕ
g. co. ⊖
c.d-fn.

Topeka 3190

c.d-fn foss.

3200
c.d-fn. poorly foss.

ϕ
c.d-fn. sl ϕ in part
c.d-fn. foss

3300
c-g. d-fn

same
c. fn w/ xln calc. poorly foss.

c. fn. w/ sc. p.p. por

3400
c.d-fn.
c-tan. d-fn.
c.d-fn.

c-lt tan. d-fn.

c. fn w/ p.p. - vug. por. some co. xln.

3500

brn-blk. sh.
bf. d-fn.
bf. d-fn.
Red. g. + blk sh.
g-blk.
g. sh + g. fn. sd.

Bf-bn. d-fn.

3600
fn. g. micac. sd. + vg sh.

c. d-fn.
vg. sh. w/ g. fn sd.
g. bn. d.
vg. sh. + fn. sd.

3700
c-tan d- co. xln. "
c. d-fn.
vg. sl. sdy sh. w/ thin beds of c-g lst.

Lansing 3760

c-tan d-fn.
ϕ
c.d-fn. faintly ⊖ vy sl ϕ
g. sh. ?

3800
c.d-fn.

g + tan-bn. d-fn.
ϕ
g + tan. fn. ⊖ in part
c-tan. d-fn.

" " " " w/ sc △

3900 ϕ
c-bf fn. ϕ in part
c.d-fn.
ϕ
c-tan fn-gran vy ϕ
c.d-fn.
c fn-sub suc.
ϕ
ϕ
c-tan. ⊖ in part

c.d-fn.

c-tan. d. △ y

tan d. sl. △ y
c. d-fn- sl. △ y

c-tan. d-fn

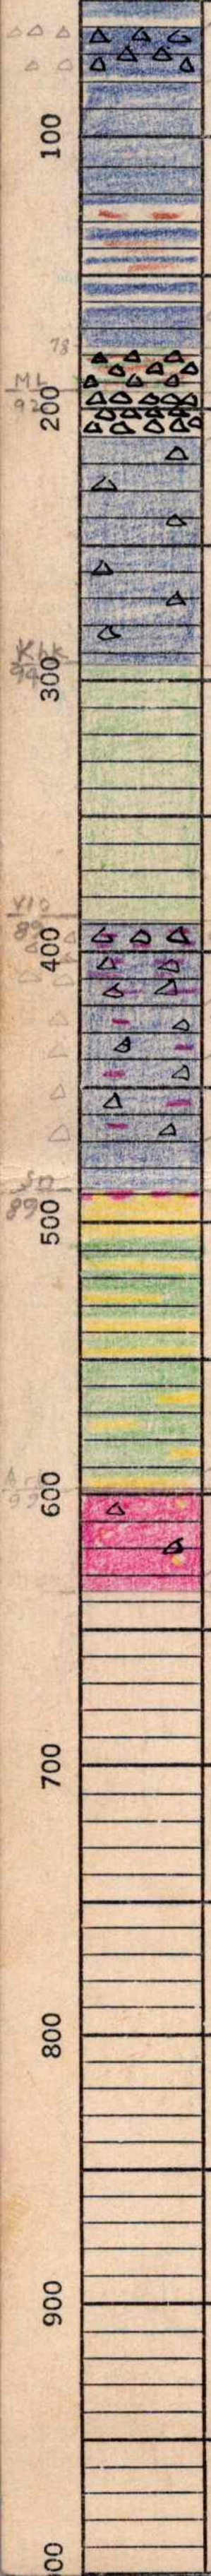

c.d-fn.Δy
c-tan.d.-fn.
lt.tan.d.
g+tan.d-fn.
c.d.
c.d. some red+lt.gn.d.

Pn.Bas.Cong 4178

vg.sh+vc.Δ

Miss.L. 4192

wh.opaqueΔ
bf.fn.lst. poorly Δy

Kinderhook 4294

gn.g-g.gn sh.

Viola 4389

c-g.co.xln lst.w/dol.xls + wh-g.Δ
g-ltbf.fn.-med xln-dol.lst. w/sc.Δ
Bf.d-fn. sl.dol.lst. w/sc.Δ
wh.vy co.xln.lst.

Simpson ~~4889~~ 4489

bf fn dol w/sc sd grains, + co.rd-L tite sd

Arb. 4599

fn-co.wh.tite sd w/ fish remains
lt.c.tan vy co.xlndol. w/sc sd grains + sl.Δy
g-lt.bf. fn-suc.dol.

TD 4636