KANSAS

KINGMAN

	R.
28	10W

2

2-63

GERMAN DRLG COMPANY

COOLEY EST. NO. 1

COMMENCED C NW NW

COMPLETED

REMARKS TD 4489'

E Log

ELEVATION
1678 KB

PRODUCTION
D&A

Kraftbilt 187 ROSS-MARTIN CO. TULSA 1, OKLAHOMA PRINTED IN U.S.A.

Dst #1 (MISS) 4016-36; op 1hr, R 117 OCM, IBHP 1130#/20"; IFP 38, FFP 76#; FBHP 818#/20".

Dst #2 (MISS) 4036-56, Op 1hr, R 60' WM, IBHP 1565#/30"; IFP 38#; FFP 57# FBHP 1337#/30"

Dst #3 (SIMP) 4368-80, op 1hr, R 630' MSW, w/scum oil, IBHP 1525#/30 IFP 83#; FFP 325# FBHP 1515#/30".

100

200

300

400

500

600

700

800

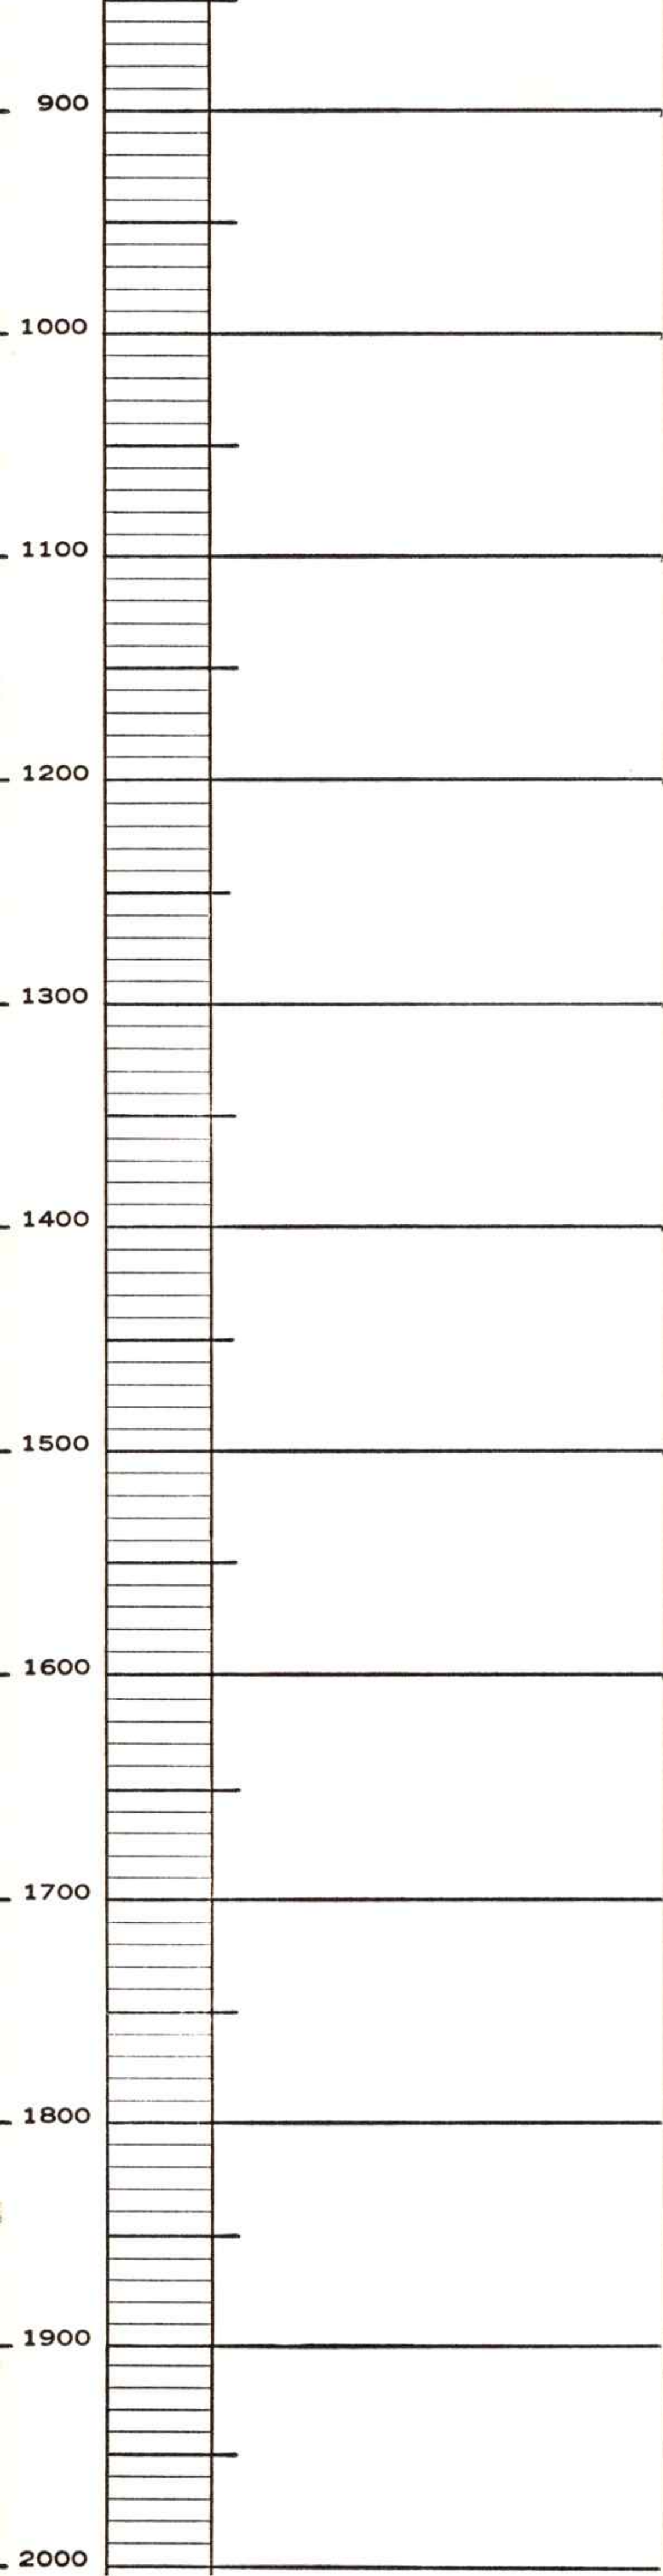

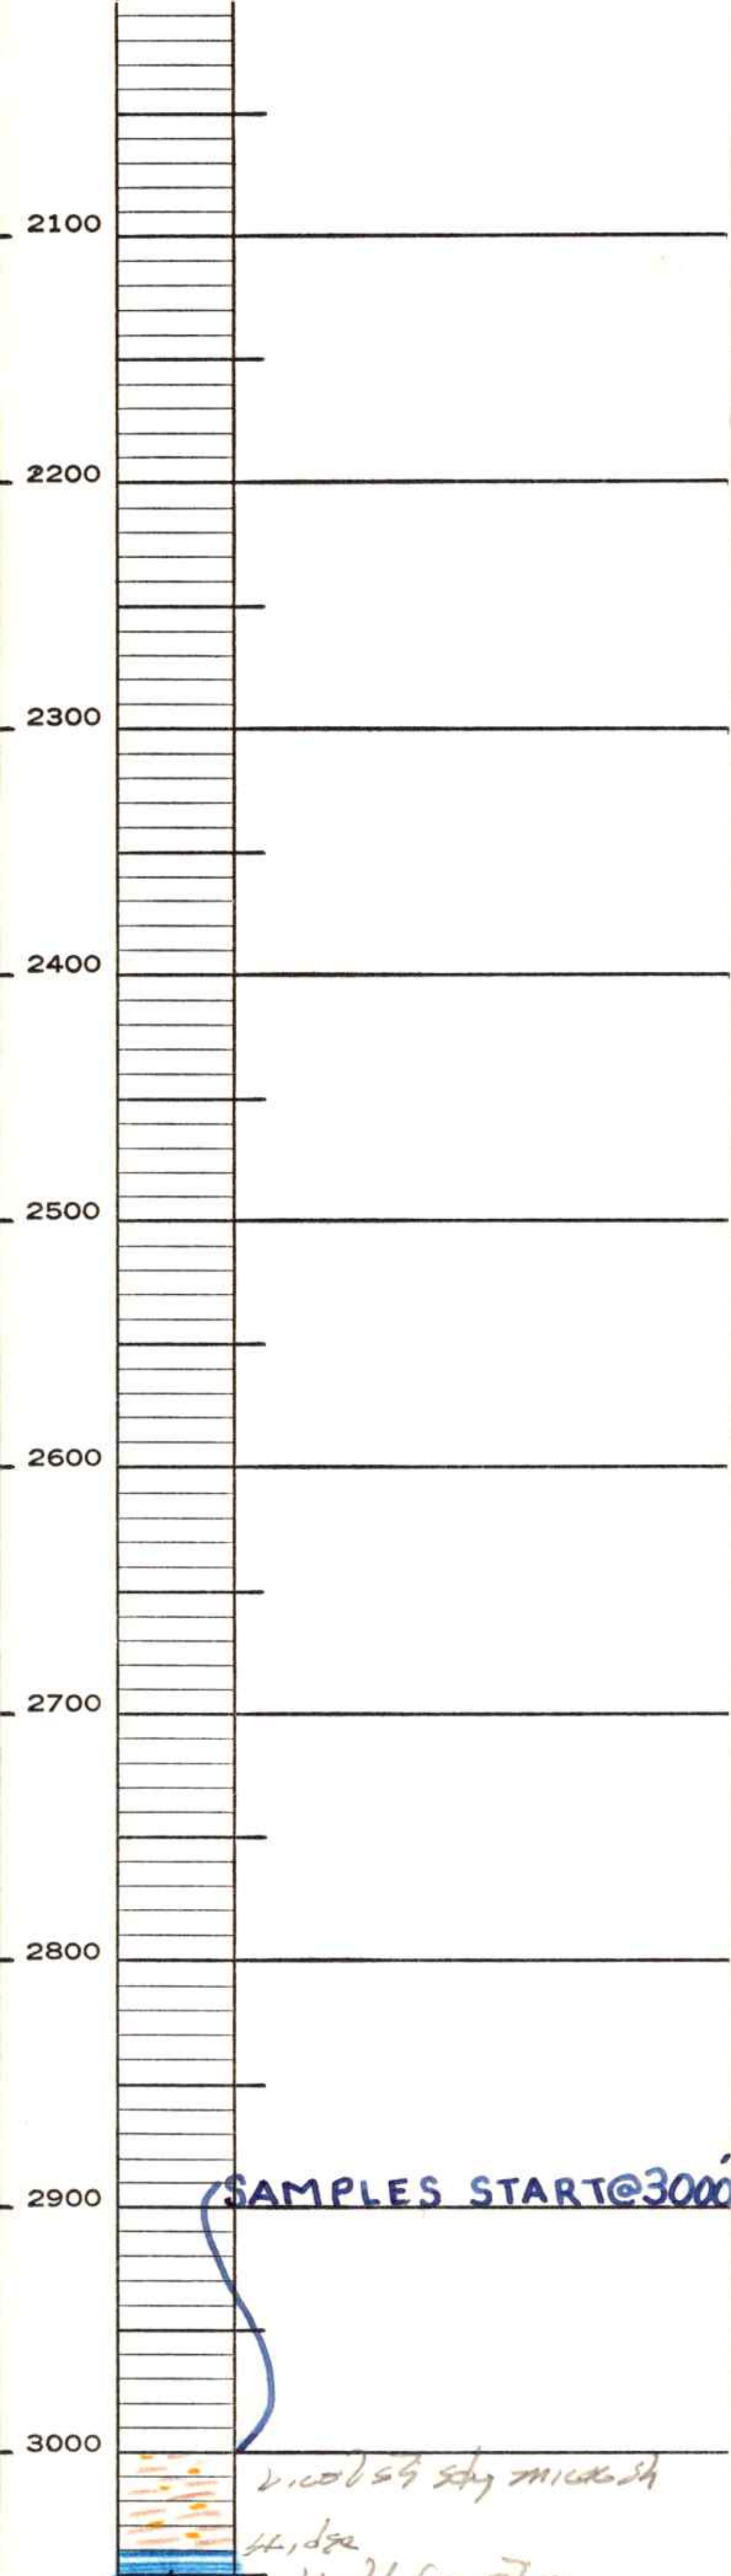

SAMPLES START@3000'

v. calc sdy slty micac sh

lt, dse



c-bf, dft, fos sl dy

dk g sh
g, dse

3100

c-bf dft

v. col sh silty limey
mxd sh

wh-g dft, sx to f.xln
p-dd fos dy dolot

3200

v. col sh
lt g to bf, dft fos, dy

dk g to blk sh.

3300

g dft
11 3311 sh
19 g bf to brn dft
30 v. col sh
wh to bf, dft fos
52
v. col sdy limey mxd sh

Hbnr Sh 3311

3400

Toronto 3330

Ls 3491

68
BL
91
LKC

68 g dft & brn dft, fos
82 v. col sdy limey sh.
91 bf dft

3500

c-g dft dy
wh to g dft ~~[illegible]~~ sl dy
dk g sh
g dft dse
lt g dft dy
dk g to blk sh
g dft

3600

lt g to bf, sx to f xln,
dy good st. zones fair
to good ooc poro
c, dft dy
lt g dse

3700

c-g, dft dy, sug. por & ooc [illegible]
[illegible] fair ol/stn

wh to g dft, dy

c-g, sx to f xln lm dy
ls to lst, ooc por
in part
blk sh
g dft

3800

c-g dft, dy

26
BKC

26 blk sh
g dft
wh dft dy. odd & ooc in part

c-bf, dft lm dy, scat ooc
poor stain top
g dft sh limey sh

3900

g dft, dft lm dy
v. col sh
g dse
c-bf, dft
v. col sh
c-bf dft fos dy
blk sh
c-dft, dft, dy

Miss 4013

4000

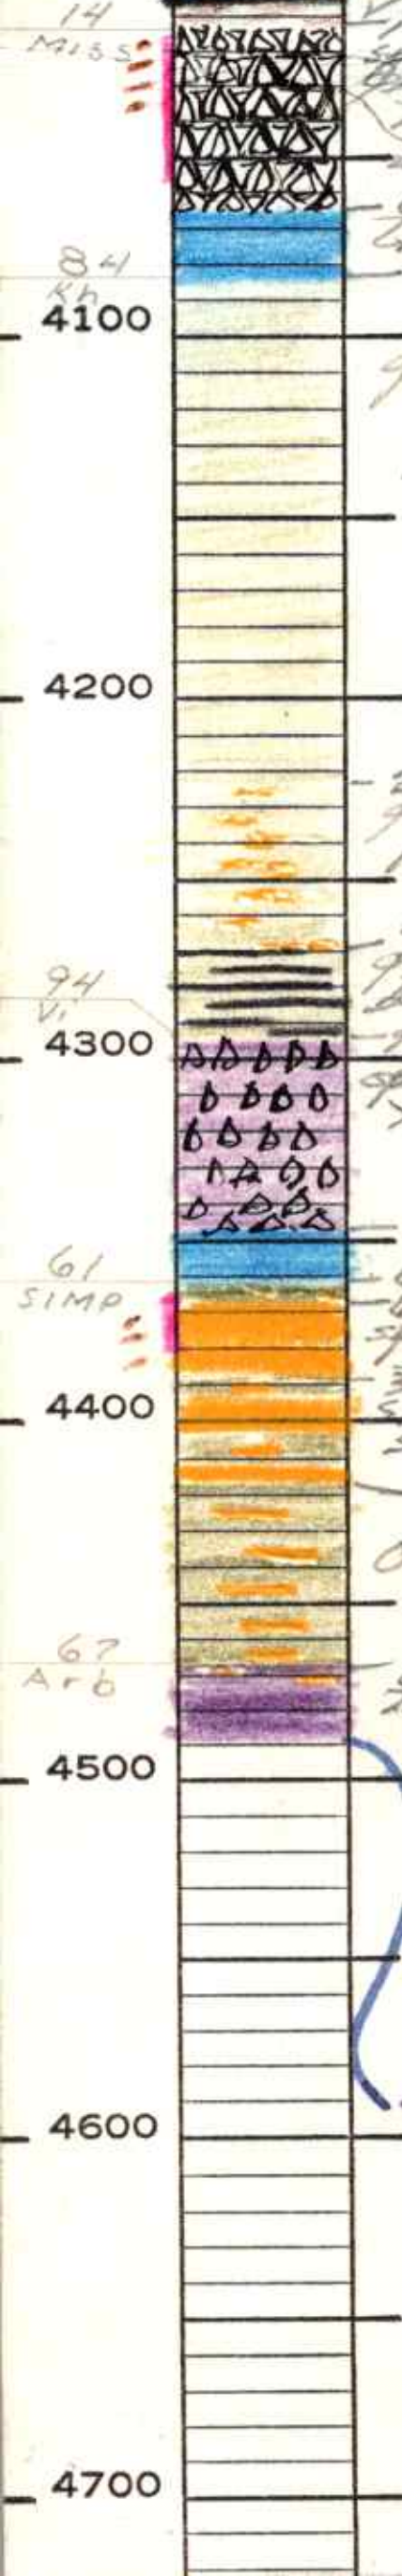

13 spotty dk ol stn in wh dolly [illegible] tripolitic residue [illegible] Rocky fos

30 [illegible]

65 [illegible] lst

84

Khk Sh 4084

green gray &
greenish-gray Sh

25 greenish gray silty platy micac Sh

Vide 4295

70 green greenish-gray & dk spore-bearing Sh

95 lt-gray & tan Sm [illegible] gr fr-med xln dolo

Sm 4361

48 wh to gray-mottled lst [illegible]

61 lt tan co. xln [illegible]

68 green sdy Sh

spotty dk ol stn [illegible] sub to subrd [illegible] friable

38 sd as above [illegible]

sd is white [illegible] most part

17 olive green sub waxy sdy Sh

Arb 4468

68 lt-gray to buff & vug to co. xln [illegible] dolo, sdy at top

TOTAL DEPTH 4489'