True Log 11-52

STATE	Kansas
COUNTY	Kingman
BLOCK	
SEC.	30
T. R.	27 9W
ALTITUDE	1664 KB
PRODUCTION	D&A
COMPANY	Coop Ref'g Assoc.
WELL NO.	1
FARM	Sheldon "C"
SURVEY	
TOTAL DEPTH	4486
	SE-SE-SW
COMMENCED	
COMPLETED	
REMARKS	

CASING RECORD

Dst 4283-89 1/2 hr
Rec 1440' gas, 50' H o&gcm, 40' wtr Bhp 1230#

Perf 4362-74
24/4283-87

SHOT	QUARTS	BETWEEN

FORM 186 - In stock and for sale by Ross-Martin Co., Tulsa

Perf 630/4287-92
36/4292-98
4281-81½
4282½-84
4284-85
4285-87
40/3980-90

100


200

RUTH BELL STEINBERG

300
400
500
600
700
800
900
1000
1100
1200
1300
1400
1500
1600

Samples start @ 2700'

2700
gry bf.f.d. foss. ls.
gry. f.d. foss. ls.
gry. bf. f.d. foss. ls.
2800
crm. lt. gry f.d. ls. foss & sh.
gry lt brn f.d. ls.
gry f.g. micac. sst. vg. sh.
2900
gry bf. f.d. foss. ls. TOPEKA 1915
crm bf. f.d. ls. foss
crm. f. gran. ool & oolic ls
crm lt. bf. f.d. ls. scat. p por.
3000
crm gry bf. f.d. ls. foss
crm. bf. f.d. foss ay ls.
gry bf. f.d. ls.
lt. gry lt. bf. f.d. foss. ls.
3100
lt. gry brn. f.d. ls.
lt. gry bf. f.d. to xln. ls.
lt. gry bf. f.d. ls.
lt. gry lt. bf. f. ls. p por in part.
3200
lt. gry bf. f.d. foss ls
wh. crm. lt. gry f.d. ls. foss.
lt. gry bf. f.d. ls.
blk. sh. HEEBNER 3245
gry bf. f.d. foss. ls.
lt. gry f.g. micac. sst.
with inter bedded red & gry sh.
bf. f. foss. ls.
3300
3400
brn. f.d. ls.
3437 gry bf. f.d. ool. ls. LANSING 3437
lt. gry bf. f.d. ls.
lt. gry bf. f.d. foss ls
wh. lt. bf. f.d. ls.
3500
lt. gry f.d. foss ls.
lt. gry bf. f.d. ls.
lt. gry bf. f.d. ay ls.
lt. bf. lt. gry f.d. foss ls.
bf. lt. gry f.d. foss ls. ay
3600
p por in part.
lt. gry bf. f.d. ls.
lt. gry bf. brn f.d. foss. ls.
lt. gry bf. f.d. ls. ool. & oolic in part
lt. gry lt. bf. f.d. ls. p por in part
lt. gry f.d. ool. ls.
3700
lt. gry lt. bf. f.d. ls. foss & ay
crm lt. gry f.d. ay ls
gry bf. f.d. ls.
3800
lt. gry bf. f.d. ls.
bf. f. xln. oolic ls
bf. f.d. ool. f. oolic ay ls.
lt. gry bf. f.d. ay ls.
lt. gry lt. bf. f.d. foss ls
gry bf. f.d. ls.
with red & gry sh.
3900
crm gry bf. f.d. ls.
3980 wh. gry opg., residual ⊿ por. in part w/ lt. stn. MISSISSIPPIAN 3980
4000
wh. & gry opg. to subopg. speckled ⊿ weath. in part.
lt. gry opg. to subopg. foss. ⊿
cht as above w/ gry semitransl. ⊿.
wh. lt. bf. f. xln. ay ls.
4078 gry-grn., grn-gry. sh. KINDERHOOK 4078
4100
4200
gry f.g. gran. silty dolo. with spore bearing sh.
4283 bf. xln. to c. xln. dol. por. w/ lt. stn. ay. VIOLA 4283
4300
lt. bf. f. xln. ay dolo. ls.
4350 wh. bf. c. xln. ls.
bf. f. xln. c. sdy. ls.
grn wary sdy. sh.
gr. f. to med. c. ang. to subrnd frosted sst. partly por. w/ lt. stn.
sst. is dolomitic in part. SIMPSON 4350
4400
4450 sst. as above & grn. sdy sh. ARBUCKLE 4450
gry bf. f. xln. d to xln. dolo.
gry bf. xln. to c. xln. sdy dolo.
gry bf. xln. to c. xln. dolo. w/ tr. vuggy por.
ool ⊿
4500
T.D. 4490 SPLES.
T.D. 4486

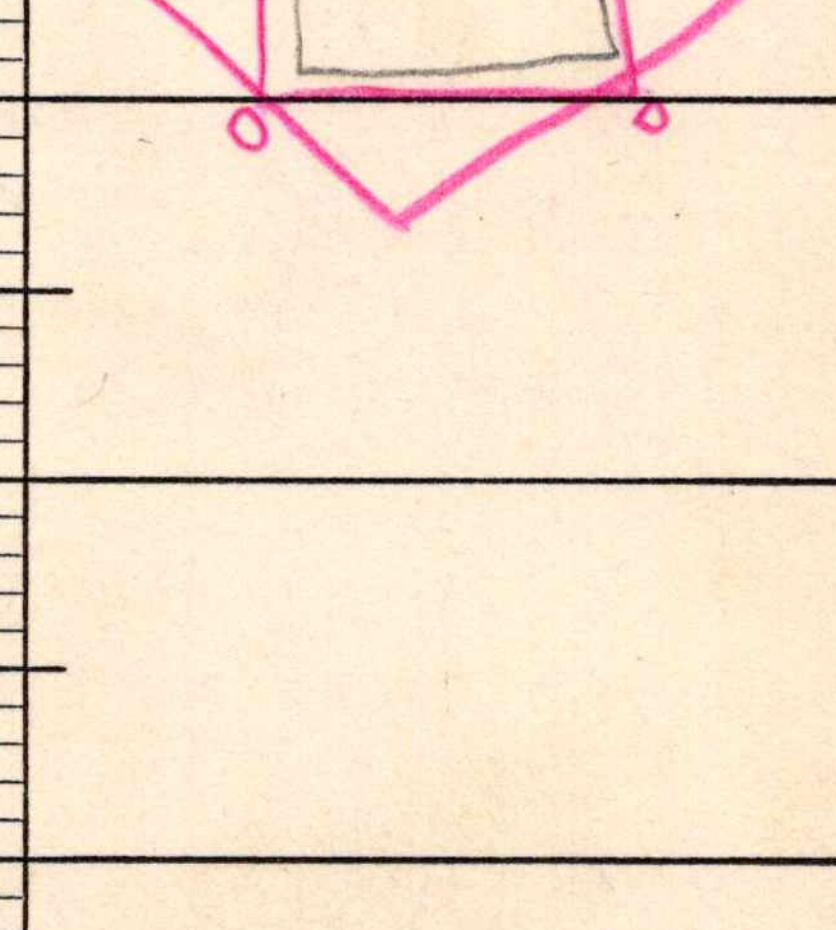

4600
3700
3800
3900