9-53

STATE: Kansas	COMPANY: Kewanee
COUNTY: Sedgewick	FARM: Roy — WELL NO. 1
BLOCK	SURVEY
SEC. 13	TOTAL DEPTH 3355'
T. 29 R. 1W	Sw-Sw-Ne
	COMMENCED
	COMPLETED
ALTITUDE 1282'	REMARKS
PRODUCTION D&A.	

CASING RECORD


DST 3315-36, 100' HO oil, 75' GCM, BHP 150#
OP: CO 3336: 10 GO & 20 GWPH: Acid 500
8 BO & 85 BWPD: SQZ
DP 3329: Bail wtr. & SSO: DD 3355:
Bail wtr.: PB 3325: Acid 1000: 5 BO & 100 BW/12hrs. SQZ: CO 3355.

SHOT — QUARTS — BETWEEN

FORM 186 - In stock and for sale by Ross-Martin Co., Tulsa

RB STEINBERG

Samples Start @ 2400'

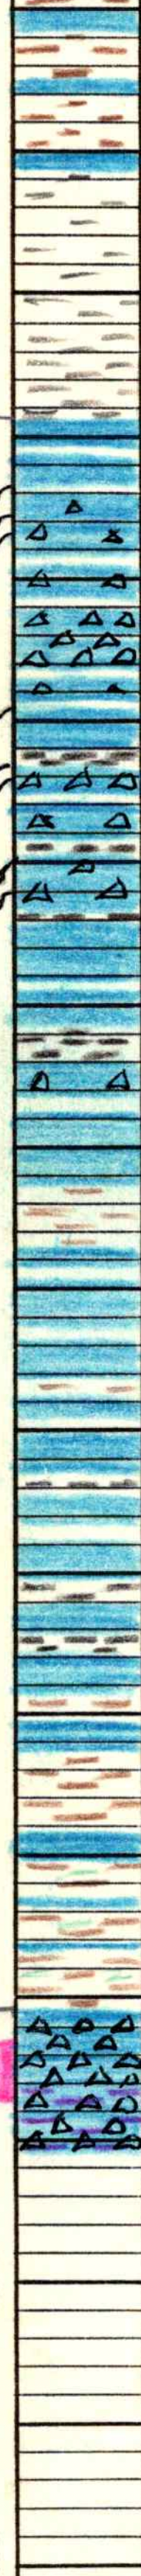

Ls 2402 — r+g sh; crm gry f foss sl sy; gry fg subc micac. por. sst interbedded r+g sh.

dk. gry bf fd

dk gry [illegible]; gry fd; gry fd foss; gry fd; med to dk gry sh

K.C. 2743

Kc 43' — gry bf fd foss; crm gry f foss sl por.; crm gry f. foss & ool. sl sy; crm f xln sl sy pp por in part

crm gry f. sy; crm f foss streaks pp por. sl sy; gry bf & brn f. foss & oolin; dk gry to blk sh; crm f bf oolic por. sl s.; dk gry to blk sh; crm gry fd sl sy; dk gry bf f xln sy oolic pp por. sl s.; dk gry to blk sh; dk gry to brn fd

gry bf f.d.; dk gry to blk sh; crm gry bf fd sl sy; crm gry fd foss

r+g sh; crm lt tan dse; gry bf fd foss; crm gry fd

crm gry bf fd; dk gry to blk sh; gry bf fd; gry bf brn fd; dk gry to blk sh; tan fd; dk gry to blk sh; bf to brn fd

crm gry fd; r+g sh; gry bf fd; v col sh w/thin beds gry dsels

Miss 3304

Miss 04 — crm gry f tomed xln sl sy ls.; crm gry f tomed. xln. foss. por.; bf & gray ls. dolo ls lt. oil stn sl sy

T.D. 3355

100 200 300 400 500 600 700 800 900 1000 1100 1200 1300 1400 1500 1600 1700 1800 1900 2000 2100 2200 2300 2400 2500 2600 2700 2800 2900 3000 3100 3200 3300 3400 3500 3600 3700 3800 3900