
STATE	Kansas
COUNTY	Kingman
BLOCK	
SEC.	6
T.	29
R.	5W
ALTITUDE	1408
PRODUCTION	D&A
COMPANY	Wakefield
FARM	Moorhouse
WELL NO.	#1
SURVEY	
TOTAL DEPTH	~~4439~~ 4439
COMMENCED	
COMPLETED	
REMARKS	SE-SE-SE

CASING RECORD

SHOT	QUARTS	BETWEEN

FORM 186 - In stock and for sale by Ross-Martin Co., Tulsa

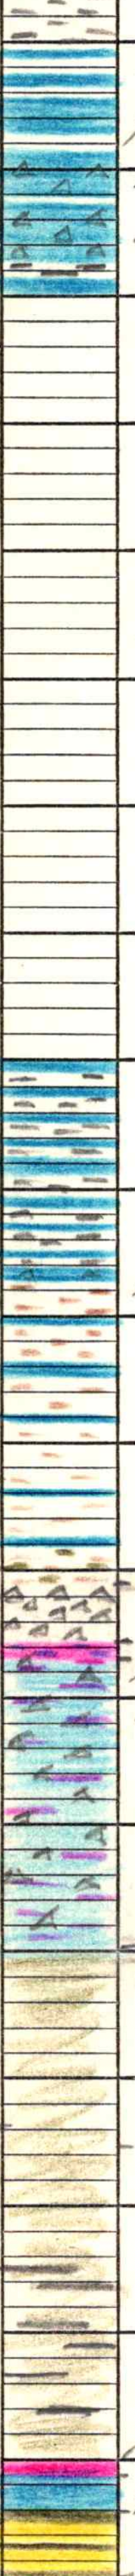

2800
g-bf. d.f.
g. bf. d.f.
cr-g. d.f. to f.
"
g-brn. sh. sltk. g. f.g. sub-vit mica sst.
g-bf-cr. d.f.

2900

3000
skip.

3100
Lansing 3140
g-brn. sndy sh.
g. bf-brn. d.f.
dk. g. sh. on g-brn. sh.
g-bf. d.f.
g-bf. tan. d.f. fos.
"

3200
g-bf. d.f. fos.
g-bf. f. fos.
dominantly g- drk. g. sh.

3300
g-bf. brn. d.f.
g-cr-bf. f. fos. sl. ool.
g-bf. f. fos. sl. por. sl. sy
g-cr-bf. f. fos. sy por.

3400

3700
g-bf. brn. d.f. ls. strks. interb. with g- drk g. sh.
g-bf. d.f. sl. sy.

3800
Mississippi 3905

3900
vg. sh.
wh-g. spongy por. to sl. Trip. chrt. resid. A.
g-bf. suc. f. xln. por. sy sl. limey dolo.
g-bf. gran. to f. xln. sl. dolo. sy.

4000
Khk. - 4050
g to greenish-g. sh.

4100
Khk-Schl 4135

4200
Viola 4250
Simpson 4270
g. co. xln to rhombic dolo.
g-cr-wh. co. xln. ls.
green. g. on g-wh. med. g. sub-rd. frost. por. sst.
wh-g. very f.g. frost. sl. dolo. sst. sat.
dominantly gr. sh. strks. dolo. sst.

4300
g. f.g. dolo. sst.
Arb. 4390

4400
g-bf. co. xln to rhombic sl. por. dolo.
T.D. 39

4500
Samples have been miss-labled all up & down the hole
Viola to T.D. appears O.K.