655

STATE Kansas	COMPANY Rupp-Ferguson
COUNTY Kingman	FARM Shephard — WELL NO. 1
BLOCK	SURVEY
SEC. 30	
T. 29 R. 8w	TOTAL DEPTH, 4666
	NE-NE-SE
	COMMENCED
	COMPLETED
ALTITUDE 1589	REMARKS
PRODUCTION D&A	

CASING RECORD

DST 4185-4200/1hr/125' Fl. (50% Mud & 50% Sw), BHP 1275#.


SHOT — QUARTS — BETWEEN

FORM 186 - In stock and for sale by Ross-Martin Co., Tulsa

Sdl. borrowed from Rupp-Ferguson

R.B.S.

Samples Start @ 3000'

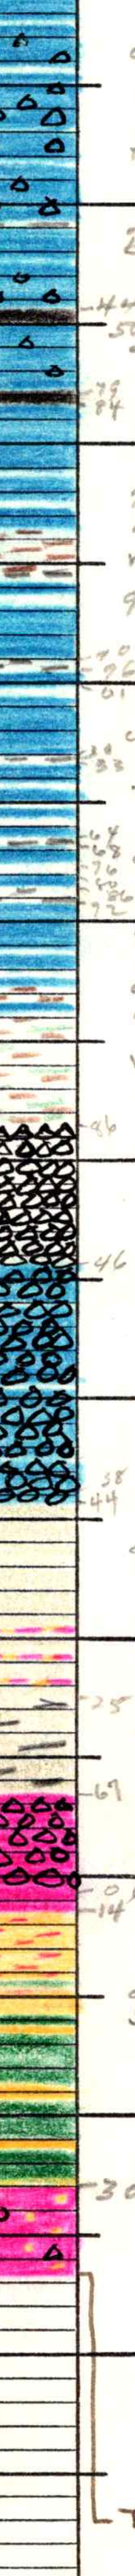

3000 — crm gry f xln foss lst - streaks oolic por.
ay in part.
gry fd foss slay
gry f foss
crm gry fd foss
crm lt gry f xln streaks n por.
HEEBNER SHALE ZONE 3204
04 dk gry to blk sh
24 gry bf fd
34 lt brn bf to brn dse lst
40 blk sh
52 lt gry to bf fd foss
58 wh to crm f xln foss to dse lst tr. Δ
91 red gy sh
96 gry fd sub. micac sst.
interbedded gry sh
red sh w/ streaks of sst. as above.
LS 3476
68 bf to brn fd foss
73 / 76 crm gry f foss
crm gry bf fd oolic in part
crm tan dse
crm lt gry fd foss
bf to lt brn fd foss
bf fd slay
bf fd lst. scat oolic por
crm bf f foss lst.
crm to bf fd foss slay
crm tan bf dse to f xln slay foss lst.
crm tan bf dse to f xln lst
crm tan fd slay
crm tan dse to f xln foss scat oolic por ay lst
crm tan gry f xln slay lst.
tan gry dse to f xln slay lst
bf to lt brn dse to f xln foss lst
tan gry to gry fd slay
crm tan & gry dse to f xln poor oolic por lst
blk sh - slay
44 / 50 bf ool & oolic por lst
crm tan bf dse to f xln lst
blk sh - gry & dk gry sh
tan bf fd
gry bf fd
red gry bf dse to f xln lst
gry sh.
96 crm gry dse
01 dk gry sh
crm gry fd foss
dk gry sh
33 thin bedded gry bf dse to f xln lst.
dk gry to blk sh.
gry dse
gry dse to blk sh
gry bf fd lst
crm gry fd
red sh
MISS 4186
96 spongy por & spotty dk stn in wh opq foss residuals
46 wh to lt bf f to med xln ay lst. shaley in streaks.
KHK. SH. 4344
38 / 44 gry bf f to co xln lst
grayish-green
greenish-gray gritty brn sh.
gri Hy & dolomitic in streaks
25 sh is dk gry to almost blk & spore bearing in streaks
67 gry bf f to med xln ay dolo
VIOLA 4467
06 / 14 dolo is as above is co xln.
wh f to co g. to subrnd frosted & dolomitic sst.
grn subwaxy sh
SIM 4514
wh f to co g. to subrnd frosted sst interbedded w/ grn subwaxy sh.
ARB 4630
30 gry bf f to co xln sl sdy dolo tr. ool
T.D. 4666'