2-56

STATE Kansas

COMPANY Wilcox Oil

COUNTY Kingman

FARM De Weese

WELL NO. 1

BLOCK

SURVEY

SEC. 36

T. 29

R. 7W

TOTAL DEPTH 4245

C-NE-NW

COMMENCED

COMPLETED

REMARKS

ALTITUDE 1483

PRODUCTION D&A

CASING RECORD

DST 4121-51/36", 10' mud BHP 55#

SHOT

QUARTS

BETWEEN

FORM 186 - In stock and for sale by Ross-Martin Co., Tulsa

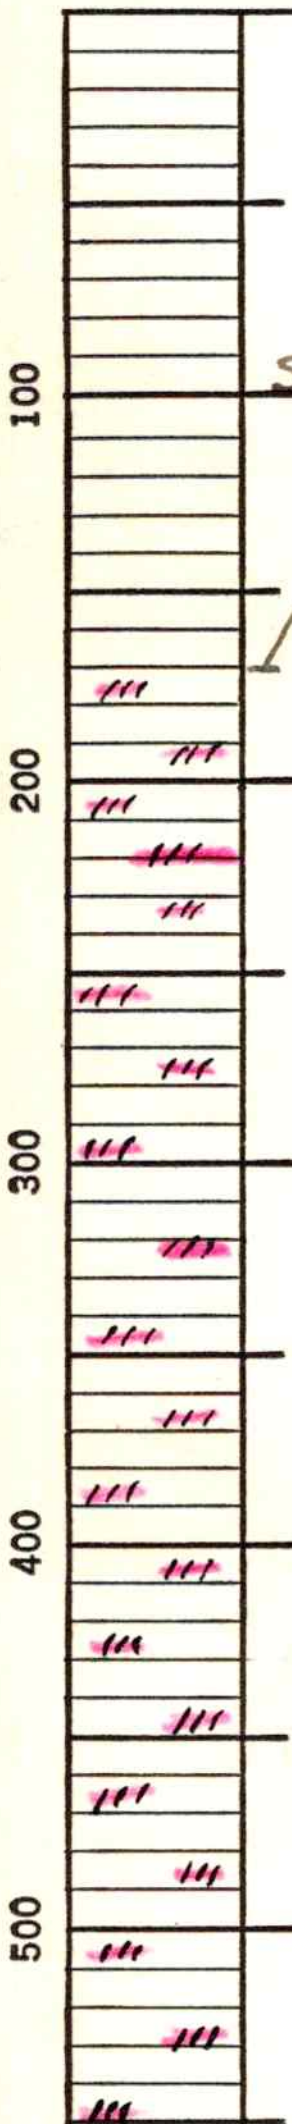

R.B.S.

Samples Start @170'

dominantly gray anhydritic shale

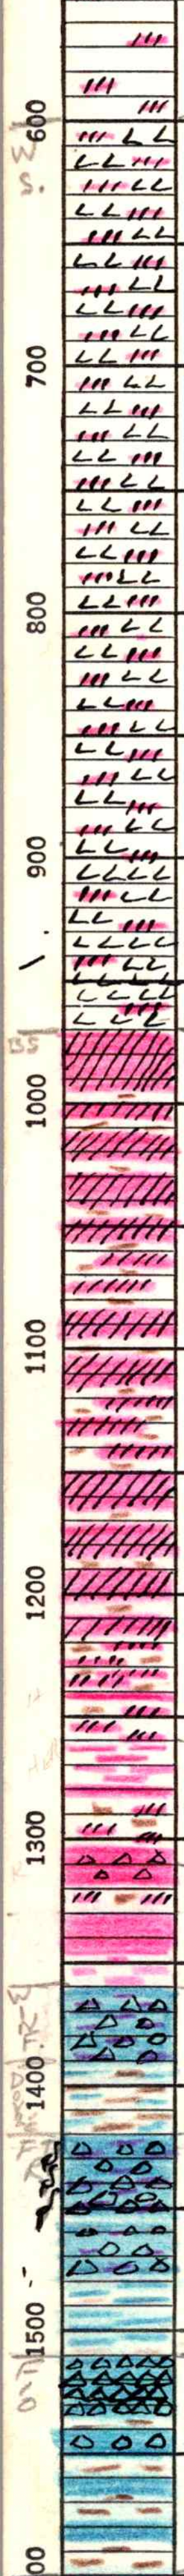

00 **Ws 600**

halite casts in dominantly gray anhydritic shale.

70 **BS 970**

wh & gray anhydrite interbedded w/red & gray shale

streak of bf selenitic dolo.

bf f suc shaley dolo.

to brn

bf f suc xln ∆y dolo.
wh sub opq ∆

gry bf suc dolo.

gry bf shaley dolo.

gry f gran foss ∆y dolomitic lst.

red & gray limey shale.

20 **FT. RILEY 1420**

oolic por in gry bf f gran ∆y dolomitic lst.

gry bf f gran to f xln ∆y sl. dolomitic lst.

bf f xln shaley lst.

10 **FLORENCE 1510**

gry dull opq fusulinidal ∆ in gry f xln foss lst.

gry f foss ∆y lst.

gry bf f foss

"

00 **WREFORD 1600**

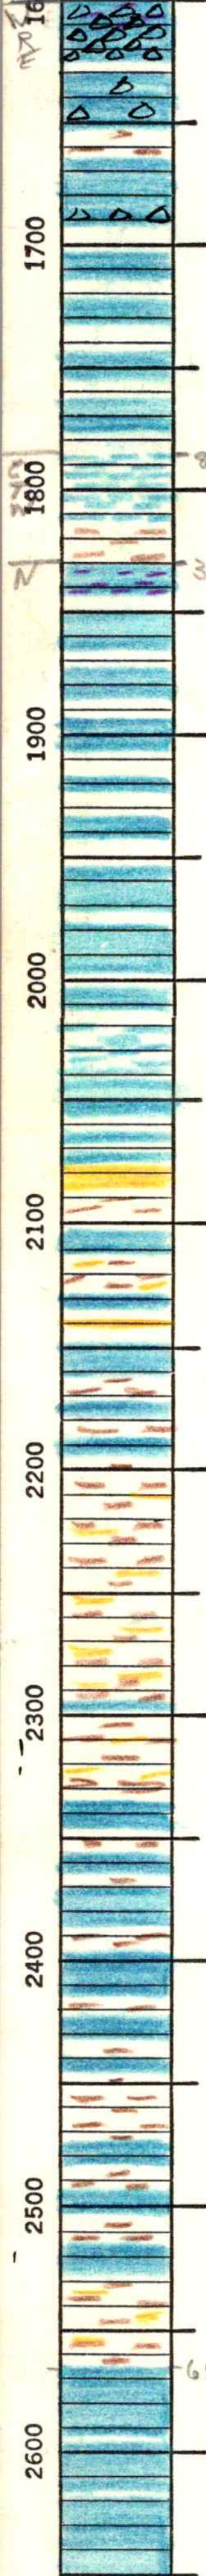

crm to bf f foss ay sl dolomitic lst-

gry f foss s lay

crm gry bf fd foss ay at base

crm dse

crm fd foss

gry bf fd foss

gry fd foss-

COTTONWOOD FUSOL. ZONE 1785

85 weathered fusulinids in

crm gry f foss shaley lst

r + g limey sh

NEVA 1830

30 crm gry dse to micro-sucrose dolomitic lst-

crm fd

crm gry fd

crm fd foss

gry fd

"

crm gry fd foss-

"

gry bf f foss

bf f foss shaley lst- fusulinids

gry bf fd foss

"

"

gry fg subc micac sst-

gry bf fd foss

r + g sl sdy sh

crm dse

gry fg subc micac sst

crm gry fd foss

"

"

r + g sdy sh-

gry f foss

r + g sdy sh-

gry bf f foss-

"

crm bf fd

gry bf f foss

crm bf f foss-

bf dse

gry bf fd

crm f foss-

"

r + g sl sdy sh-

65 crm gry fd

TOPEKA 2565

gry bf f foss

gry f foss

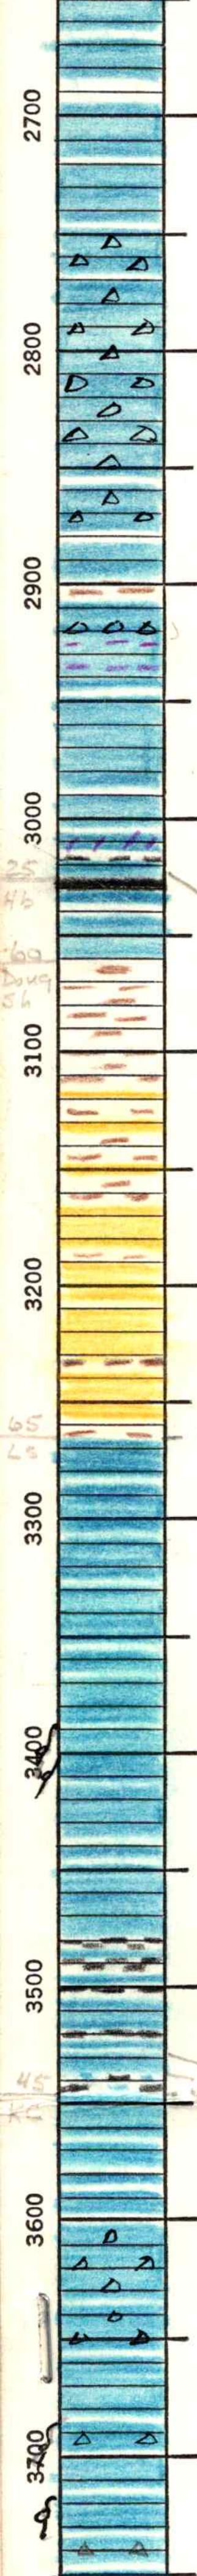

crmgry f foss.

crm f foss.

crmgry fd foss.

gry fd foss slay

crmgry fd foss slay

crm f foss. slay

crm lt bf fd foss

crm f foss. slay in part

streaks of tan fgran dolo. lst.

crmgry fd foss.

crm fd foss.

lt bf fgran sl por. dolo. lst.

dk gry m to blk sh

gry bf fd

HEEBNER 3025

25 blk sh - on gry bf fd foss lst

wh to bf fd foss lst.

r + g sl sdy sh -

interbedded gry fg subL

micac sst.

gry f to med g subL

micac sst.

shaley in part.

LANSING 3265

65 gry bf fd foss.

wh lt gry fd

crm soft por foss lst.

gry bf fd foss

gry fd

crm bf fd

crm bf fd foss scat oolic por

crmgry bf fd foss

crm dse

gry bf fd

dk gry sh interbedded w/

gry bf f xln lst.

gry bf fd

dk gry sh

bf to brn fd

gry bf fd foss

45 dk gry limey sh

gry bf to brn fd foss

gry bf f foss

crm dse

lt. gry soft por foss lst.

crm to bf fd slay

crm gry fd foss slay

crm bf dse

gry bf fd slay scat oolic por

lt gry fd

bf oolic por lst.

gry bf fd slay

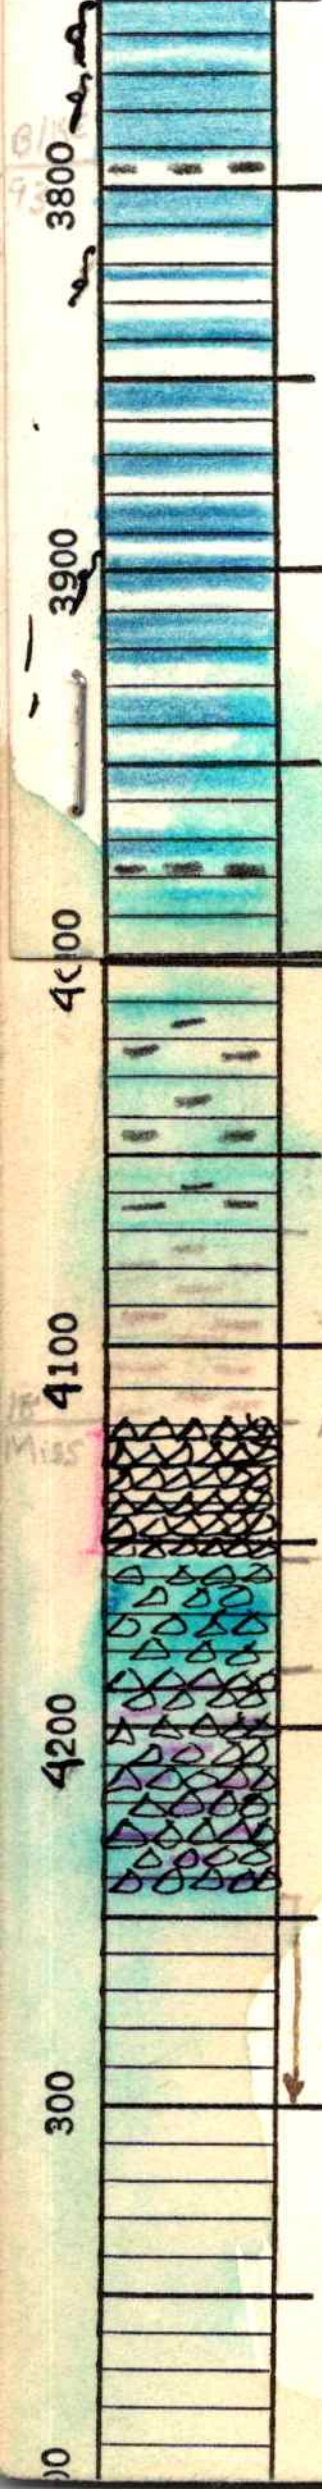

bf oolic por lst.

gry bf fd scat oolic por

dk gry to blk sh.

gry bf fd

gry bf fd ool lst.

gry bf dse

gry fd

crm gry fd

crm bf fd

gry bf fd ool in part.

crm fd foss.

crm bf fd.

gry bf fd

" dk gry to blk sh.

gry bf fd

gry bf fd interbedded w/ dk gry to blk shales.

vcol sh.

Miss 4118

18 wh to gry opq to subopq foss residual △.
spotty faint oil stn.

wh lt gry f to med xln ay lst.

wh to bf f gran to med xln ay dolomitic lst.

Total Depth 4245