5-55

STATE: Kansas	COMPANY: Champlin
COUNTY: Harper	FARM: McIntyre — WELL NO. 1
BLOCK	SURVEY
SEC. 1	
T. 31 — R. 8W	TOTAL DEPTH 4407'
	Nw-Nw-Nw
	COMMENCED
	COMPLETED electrolog
ALTITUDE 1653	REMARKS
PRODUCTION	

CASING RECORD

DST 3915-50/2hr. 540' H.GC & Sl.OCM, 720' SW

BHP 1425 #.

DST 4391-4407/2hr. 180' HO & GCM 300' SW BHP 1543#.

DST 4378-4407/2hr. 360' O & GCM, 180' SW, 90'

Drl. Mud BHP 1450 #


SHOT	QUARTS	BETWEEN

FORM 186 - In stock and for sale by Ross-Martin Co., Tulsa

100 200 300 400 500 600 700 800 900 1000 1100 1200 1300 1400 1500 1600 1700 1800 1900 2000 2100 2200 2300

Samples Start @ 3400'

3400 3500 3600 3700 3800 3900 4000 4100 4200 4300 4400 4500

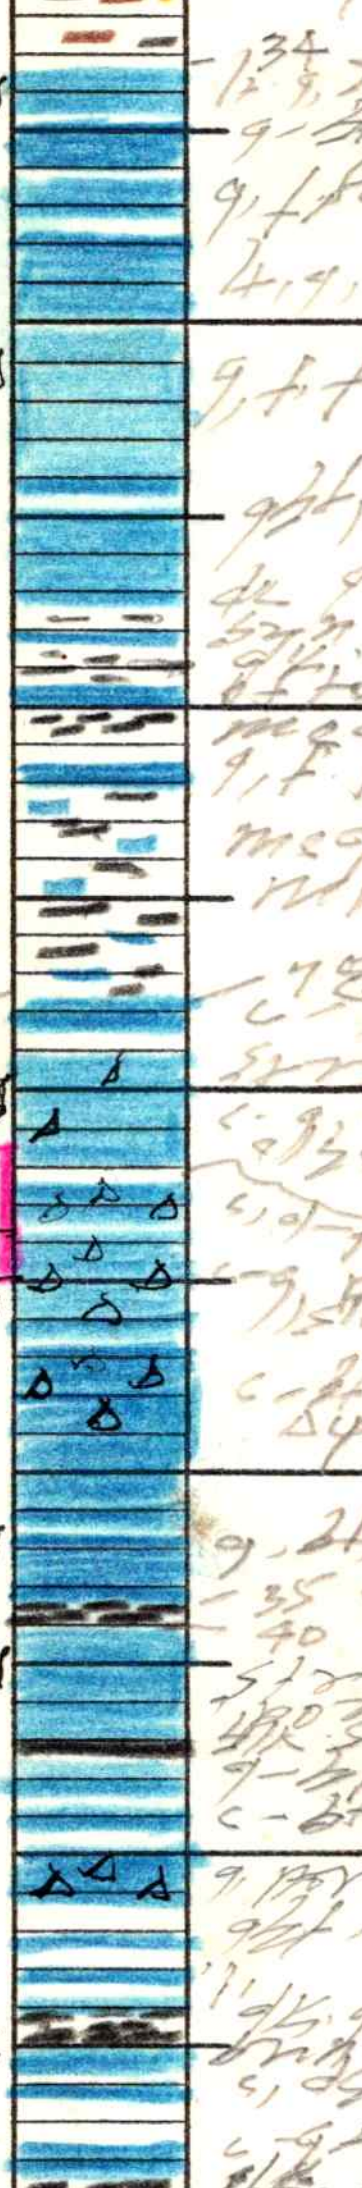

Hebner Sh 3400

... sli. sdy. sh
... micac sst
... micac sst

Ls 3634

Red, gray, & dk. g. ...
very slightly sdy sh
... soft ... fos. sh ... lst.
... fos
... soft por fos lst
... fos. sli. scat. ooc. por.
med. to dk. g. sh.
med. to dk. g. limey micac sh

KC 3878

streaks ... por ...
... fos ... lst.
... sli. ooc. ... spotty oil stn
... spotty oil stn
... fos. lst.
... in part.
... fos. ooc. por at top
... dk. g. to blksh
streaks ooc. ...
... fos
... fos ... lst.
dk. g. to blk sh
... sli. ooc. por.
dk. g. to blk sh.
wh. soft, por. fos. lst.
scat. ooc. por.
blk. sh.
med. g. dk. g. blk & greenish sh

Miss 4378

... op to sub op ...
wh. ... spotty dk. oil stn & good vesicular porosity in part

T.D. 4407'

3600 3700 3800 3900