KANSAS
GRANT

11-65

T. 30
R. 38w

25

HUGOTON PROD. COMPANY
CARTER NO. 2-25
COMMENCED C SE SE
COMPLETED
REMARKS TD 5950´

ELEVATION
3143 KB
PRODUCTION
8,194,000 cfgpd

E Log

Kraftbilt 187 ROSS-MARTIN CO.
TULSA 1, OKLAHOMA PRINTED IN U.S.A.

DST #1: 4822-47, op 1 hr, R 180'M, ISIP 87#/30"; FP'S 77-97# FSIP 123#/30".

Perf 20/2931-36, 36/2919-28, 24/2892-98, 40/2869-80, 20/2858-63, 30/2845-54, 8/2827-29, 12/2821-24, 20/2811-16, 8/2805-07, 20/2797-2802, 8000 A, Frac, & ld, 72/20 Ga 8,194,000 Cfgpd, SIP 338# CG 2797-2936.

100

200

300

400

500

600

700

800

900

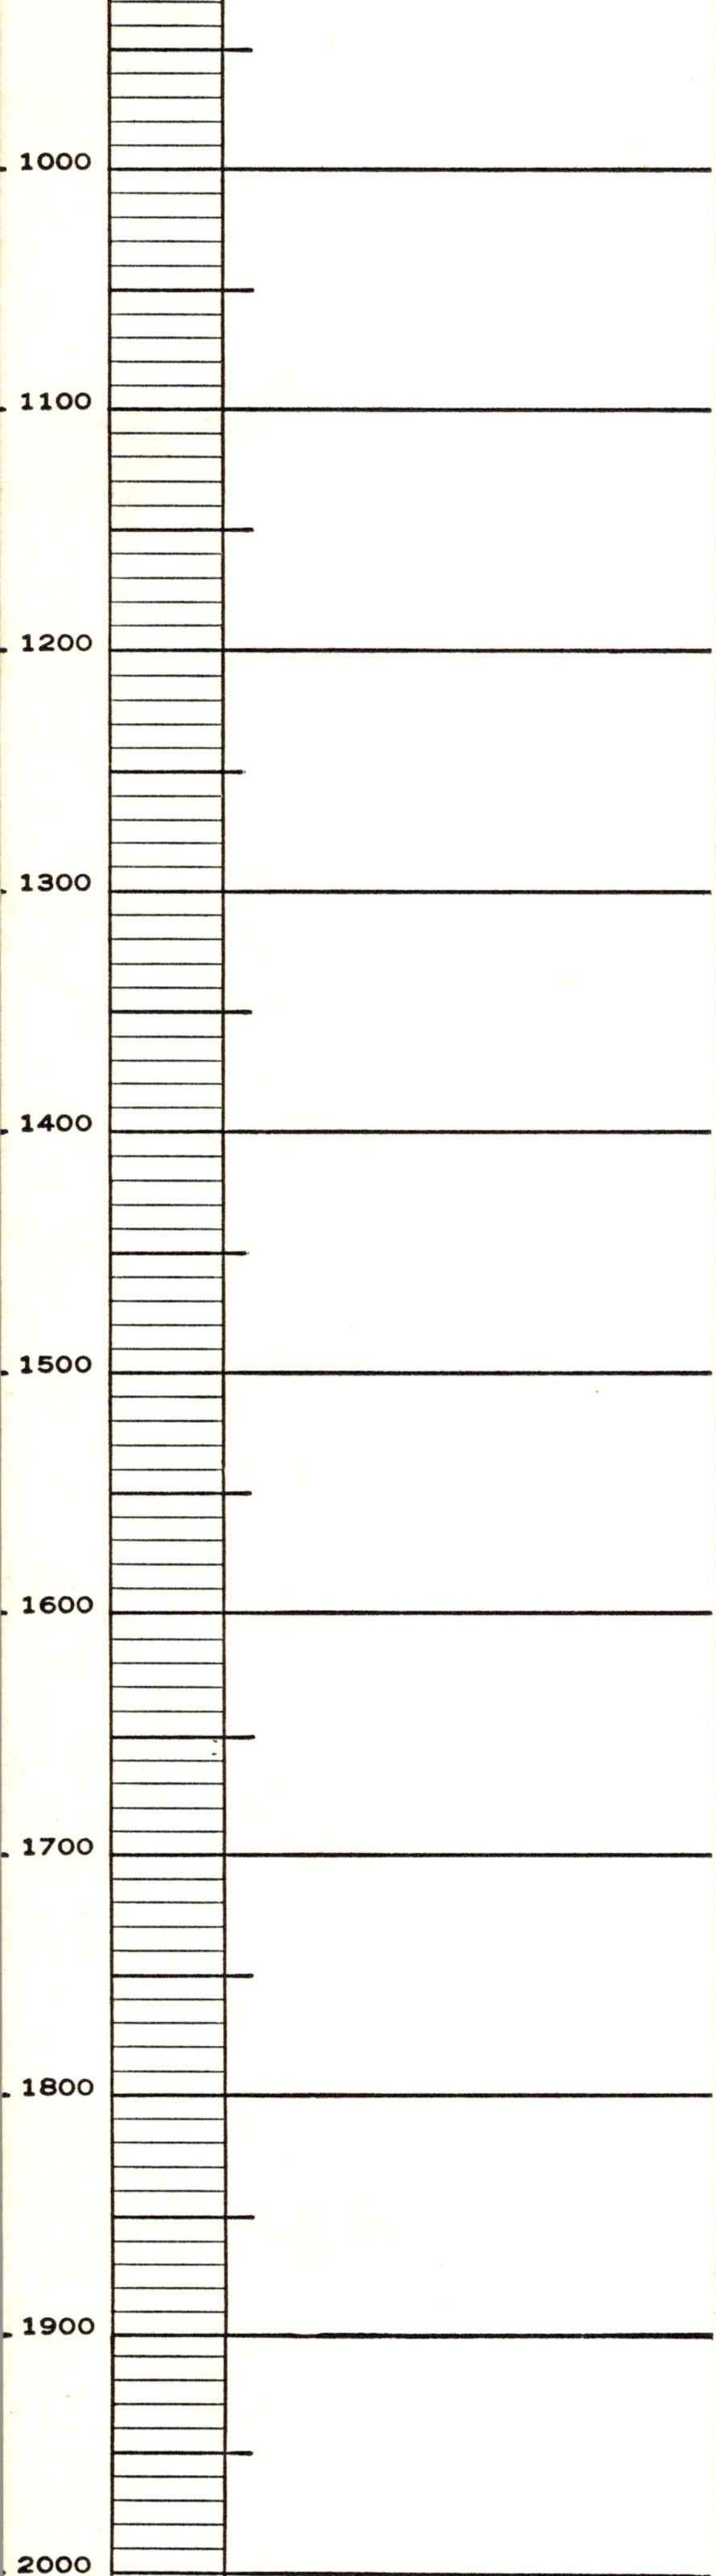

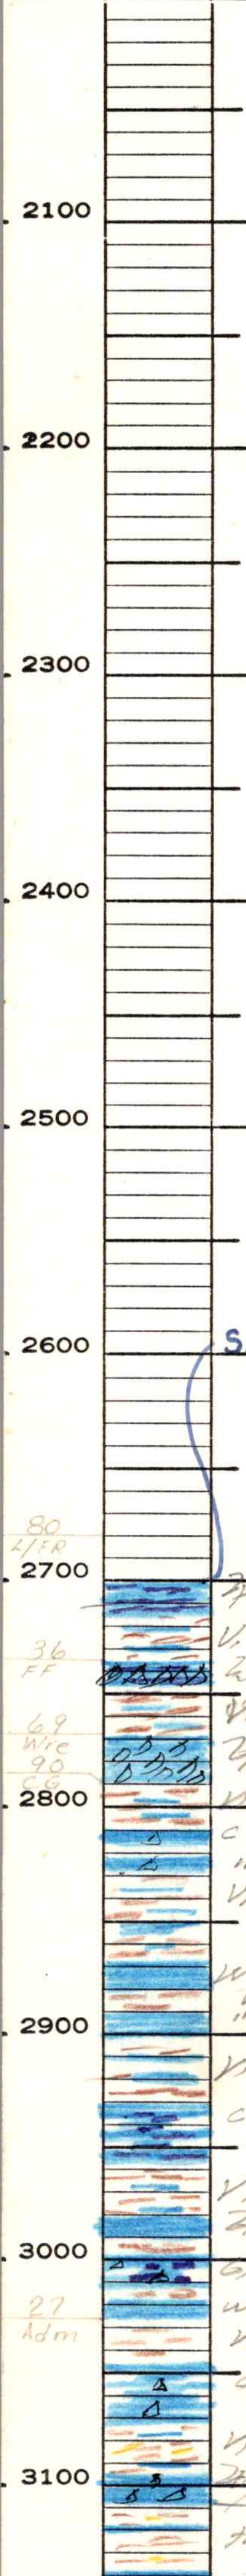

SAMPLES START@ 2700'

Florence 2736

Lt g ltlt fos [illegible]

V. col lmy Sh

Lst dk abdt ool brit Dy

V. col lmy Sh

Wreford 2769

Lt g to ltlt fos Dy

v col lmy Sh

c g, ff. Sl Dy

″

V col lmy Sh

wh to c g ltlt fos

V. col Sh

″

V. col lmy Sh

c g, suc to ltlt Sl Dy
Sh Dy foss Lst

V. col lmy Sh

Lt g Sh

Lt g ltlt fos Sh Dy Sl Dy [illegible]

wh to g Lst

V col Sh

c g, ltlt fos Sh Dy Sl Dy Lst

V. col Sl sdy lmy Sh

Lt g, ltlt Dy

[illegible] Lst,
[illegible] V. col Sl sdy Sh

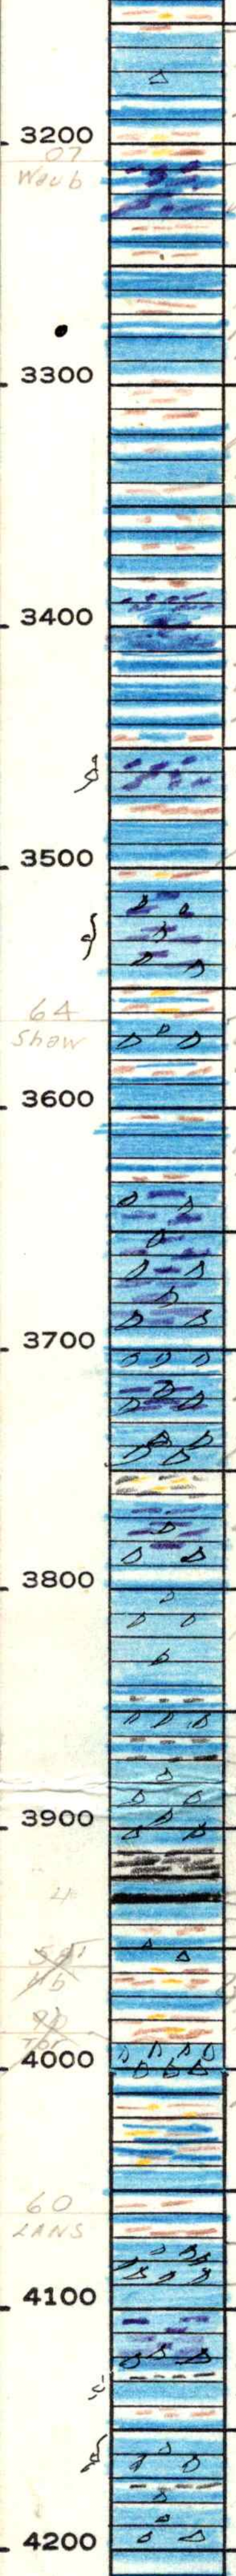

c-g, dt. fos sl. dy
g, dse
v. col sl. sdy sh

g-dt, suc to f. xln sl. [illegible]
v. [illegible]
c-g, dt. fos
"

Wabaunsee 3207

"
g, dse
wh to cr, dt, dt. fos

v. col sh
g-[illegible]
[illegible] g, dt. fos
c-g, dt
"
"
[illegible] g to dt suc to f. xln [illegible]
[illegible]

[illegible] g, dt
"
" v. col [illegible] sh
[illegible] suc to f. xln [illegible]
[illegible]
v. col [illegible]
g. dt. fos
v. col sl. sdy sh

c-g, dt, suc to f. xln dy fos
[illegible]
v. col sl. sdy [illegible] sh
64
c-g, dt. dy
v. col [illegible] sh

Top 3564

[illegible]
g, dt. fos dy
g, dse col sh

wh to dt, suc to f. xln
[illegible] fos dy
[illegible]

c-g, dt. dy

[illegible] g, suc [illegible] dy [illegible]
g, dt, dt. dy
med to dk g silty [illegible] sh
[illegible] g to dt [illegible] f. xln
[illegible] dy [illegible]

g, dt. dt. fos sl. dy

[illegible]
g, dt, dt. dy
[illegible] g sh & dt [illegible]
[illegible]

[illegible] 3928

Toronto 3947

[illegible]
28 [illegible] sh
32 g, dt [illegible]
[illegible] sh
47 [illegible] dt. fos sl. dy
v. col sl. sdy sh
[illegible]
"
c, dt, dy

g, dt mottled fos [illegible]
v. col sl. silty [illegible] sh
g, dt, dse to xln fos [illegible]
[illegible]
[illegible] dt. fos

Ls? 4072

72
wh, c, & g, dt. dy
c-g, dse

c-g suc to f. xln [illegible]
[illegible] dy [illegible]
g, dt [illegible]
v. [illegible]
c-g, f. xln dy [illegible]
g, dse sl. dy
g, dt. dy
g, dse

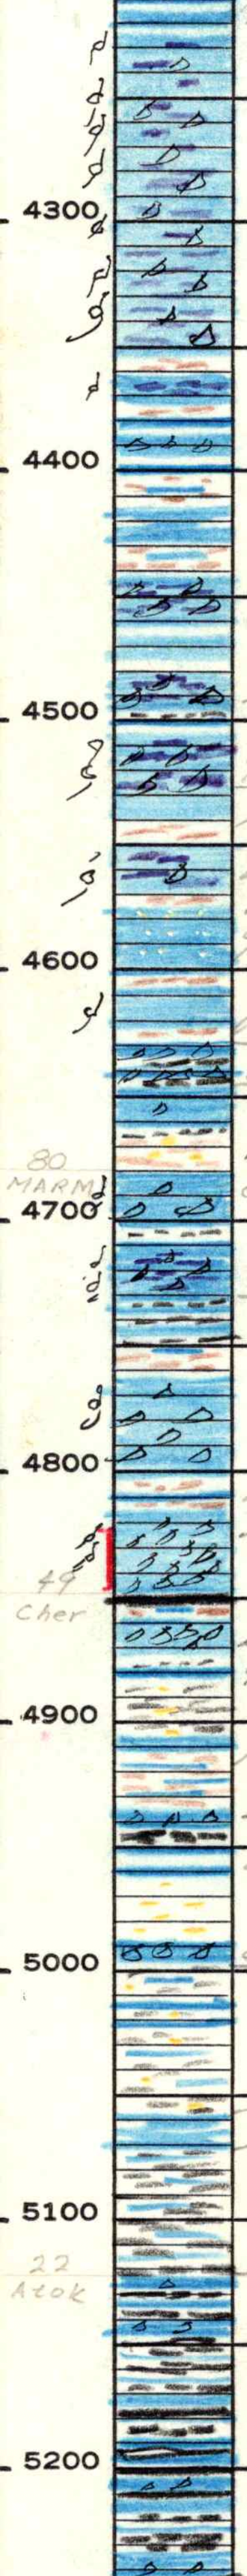

g, FT

zones fair to good ooc
& PP por in lt, g to
lt, suc to f xln fos
dy good St

V. col Sh
c-g, suc to f xln dy good St
[illegible] tight
[illegible] lt, dt, dy
[illegible]

V. col Lmy Sh
g, lt, shy Lst
V. col Lmy Sh
Lt g to lt, suc to f xln
por dy good St

g lt, dt

g, lt, suc por dy good St
[illegible] Sh

g, lt, suc to f xln dy good St
scat ooc por
g, lt [illegible]
V. col Sh

[illegible] suc to f xln dy [illegible]
V. col Sh
g, lt [illegible]
[illegible] nondescript Lst

V. col [illegible]
[illegible] Sh

BKC 4662

g, lt, dse dy Lst
lt, tob [illegible] dy Lst
dk g to [illegible]
V. col Sh silty mica Sh

Mrm 4680

c-g, lt dy, scat ooc por.
dk g Sh
Lt, g, suc por ooc dy [illegible] Lst
dk g [illegible] dse dy Lst
V, col Lmy Sh
c-lt, [illegible] dy, ooc near top

g, dse [illegible] Sh
[illegible] ooc & pp por in
c-lt, [illegible] dy Lst
[illegible] Lmy Sh
V. col
lt, [illegible] dy
[illegible] Sh
g [illegible]
med to dk g silty mica Sh

g-lt, dse
V. col Lmy Sh
lt, dse dy Lst
[illegible] Sh

g, silty mica Sh

c-lt, dt, dy

thin beds c, g [illegible]
Lst in [illegible] to dk g Sh
[illegible] silty
g, [illegible] Lst
-12
thin beds lt to brn dse
Lst in dk g Sh

Atoka? 5122

-22
g, lt [illegible], dse to
[illegible] dy Lst
[illegible] with
dk g to [illegible] Sh
Cherts are dk colored
[illegible] for most pt

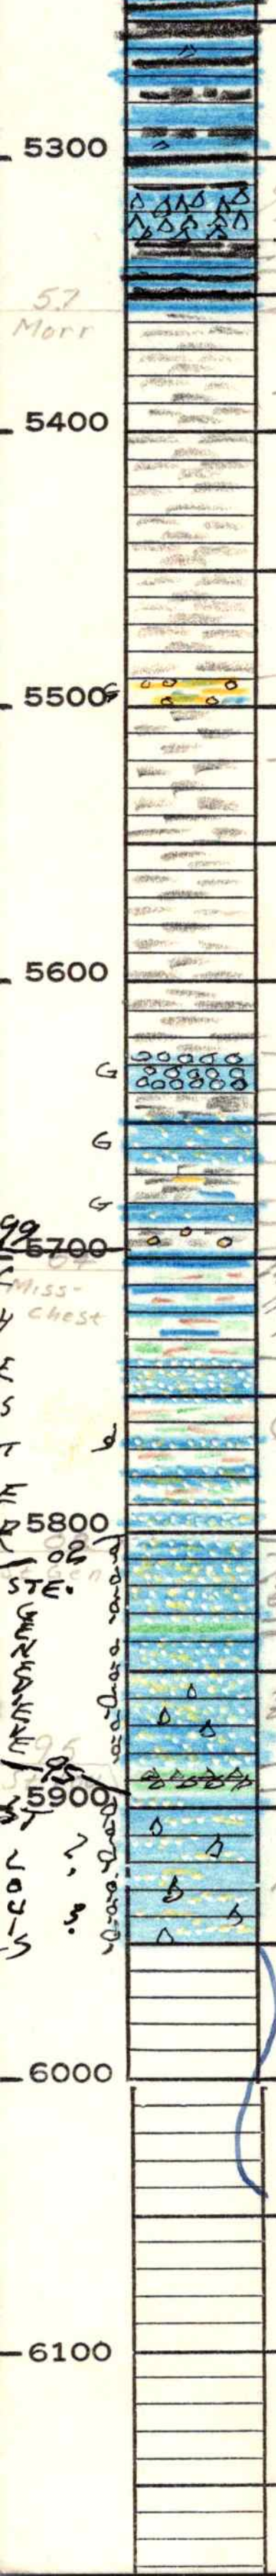

Morrow 5357

9 bt f gran-sdy speckled, [illegible] siliceous lst

5/50 dk g [illegible] sh lithographic lst

37 42 lt to med g lith graphic lst dk brn [illegible] lst with interbedded cannel coal

57

sh: dominantly dk g [illegible] sub micas, & slightly [illegible]

9 lt f to co g sub [illegible] sdy [illegible] lt [illegible] sdy [illegible] lst

sh as above

Miss (Chester) 5699

26 lt g to bff f to co. xln fos sdy glauconitic lst

sh as above

48 g lt, f to co. xln fos,

67 [illegible] glauc lst dk g sdy [illegible] sh

80 g co xln fos sdy glauc

88 co sub rnd [illegible] dk g sh

99

g - lt, [illegible] to lithographic lst interbedded with green gray & some brn. non-mkr sh.

37 [illegible] wh to bff, [illegible] lst interbedded with sh as above (some of lst is also micro-oolitic

02

lt g f. gran finely arenaceous micro-fos lst

32 38 green & brn. [illegible] sh

these zones are coarsely oolitic & with med sd. [illegible] [illegible] [illegible]

86 brn & lt. g subool [illegible]

95 green [illegible] sh

lt g to bf, [illegible] to f. gran, sometimes than normal f med & co, oo lst. [illegible] & off-white [illegible]

TOTAL DEPTH 5950'

2700

3250