1-57.

STATE	Kansas
COUNTY	Harper
COMPANY	Mull Drlg
FARM	Dusenberry
WELL NO.	1
SEC.	10
T.	34
R.	8W
TOTAL DEPTH	5090
	SE-SE-NW
ALTITUDE	1346
PRODUCTION	D&A
REMARKS	No Elec Log To Use When Exam Sples.

CASING RECORD

DST 4420-45/90", 260' sl gip, 30' slGCM

DST 4602-20/2hrGG/7", 84910CFG/10", 140 MCFG/2hr, 45'GCM, BHP 1860#


DST 4620-40/2hr, 930' gip, 80' slospk GSPM, BHP 1010

DST 4640-80/90", 80' vslo+GCM, BHP 60#

DST 5057-66/2hr, 485' sndy sw, BHP 1700#

SHOT | QUARTS | BETWEEN

FORM 186 - In stock and for sale by Ross-Martin Co., Tulsa

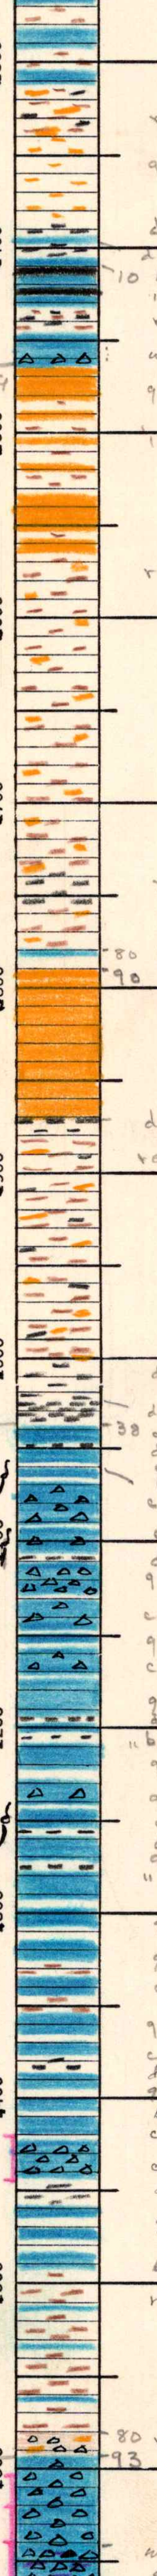

100 R.B.S.

900 Samples start @ 3000'

3000 gry sdy sh
crm bf fd
r+gsdy sh
r+g sl sdy sh-

3100 wh crm fd
gry fg subcmicac sst
interbedded gry sh-

crm fd
r+g sl sdy sh-

bf fd foss
crm bf fd
bf fd foss-

"
red gry & dk gry sl sdy sh-
gry sdy micac sh-

3400 dk gry sh on bf to bm fd foss
10 blk sh on bf fd lst.
dk gry to blk sh on bf to brn fd foss
"
red gry & dk gry sh-
wh to gm ffoss slay in part
gry f to med g subcmicac sst. HEEB. 3410
64 Doug

interbedded r+g sh-

r+g sl sdy sh-

med fo dk gry sh-
r+g sl sdy sh- STALNAKER 3790
80 bf to brn ffoss. on gry sh-
90 gry f to med g subcmicac por sst-

dk gry sh-
red gry & dk gry sl sdy sh-

4000 dk gry sh-
38 KC dk gry to blk sh. KC. 4038
gry fd foss-
dk gry to blk sh
gry lt bf fd foss
gry bf scat oolic por
crm lt gry fd foss ay lst
crm fd foss slay scat oolic por
dk gry sh-
gry bf fd ay
crm bf fd slay
gry bf mottled fd foss lst-
crm bf fd foss slay
gry bf fd
bf to brn to blk sh-
gry bf fd
gry fd slay
gry bf fd scat oolic por.
gry bf fd
"
gry bf fd foss-
gry bf fd
crm bf fd
gry bf fd foss
crm gry fd
dk gry sh
gry bf fd
bf to brn fd
crm bf dse
crm bf f foss ay sl por lst-
dk gry sh-
gry bf fd
"
bf to brn fd
4500 r+g sl sdy sh- w/thin beds gry bf dse lst-

PBC. 4580
MISS 4593
80 vg sl sdy sh & viola
93 Miss wh to bf f to cxln slay lst.
traces glauconite sl por. spots faint oil stn-

wh to bf f gran to cxln ay dolo. lst- spotty H oil stn. in part

4700 lt gry lt bf f gran to med xln dolo. lst- abundant dk gry speckled & mottled opg foss

lst a. a.- shaley in part-

90 green sh w/ thin beds gry dse lst KHK. 4890

CHATTANOOGA 4980
80 blk blocky spore-bearing sh.
MISENER 5003
VIOLA 5005
03 gry f to med g subrnd tight pyritic sst
05 bf to brn med xln ay dolo- gry to brn
lt gry to bf f gran to med xln ay dolo. lst.
50 lt gry cxln lst. SM 5050
gry brn f xln sdy dolo. on gry med to cg dolomitic sst w/ spotty blk oil stn.
wh gry f to cg gl to subrnd frosted sst.

(sples very poor 5066'-TD)

Total Depth 5090'