2-76

STATE Kansas	COMPANY Sutton	
COUNTY Ness	FARM Cofer	WELL NO. 1
BLOCK	SURVEY	
SEC. 27		4485 TOTAL DEPTH
T. 16S R. 23W	C-SW-SE	
	COMMENCED	
	COMPLETED	
ALTITUDE 2468 KB	REMARKS Elog!	
PRODUCTION D.&A.		

CASING RECORD

SHOT QUARTS BETWEEN

FORM 186 - In stock and for sale by Ross-Martin Co., Tulsa

100

200

300

400

500

600

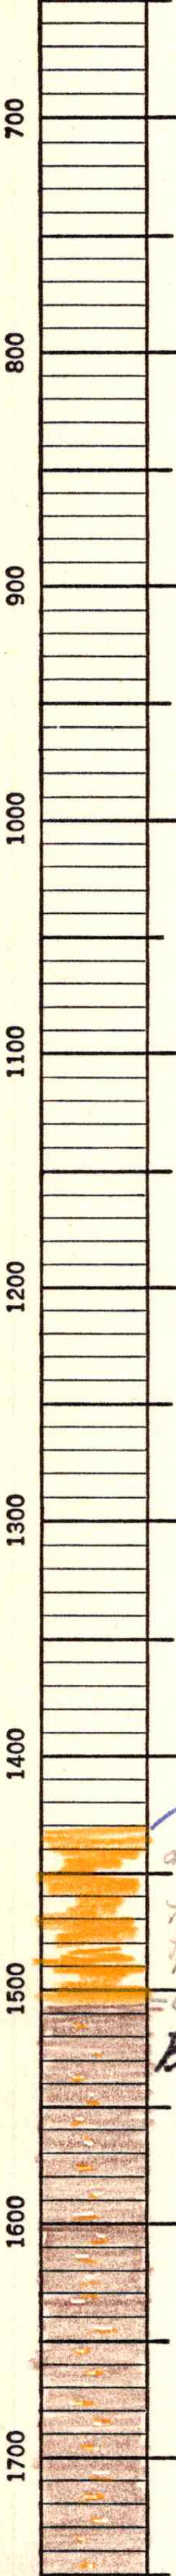

Samples Start @ 1430

amber and orange-pink, shly. f-med g, rounded, polished friable sst. Free-drilling in part.

03

Base Cedar Hills Sst 1503

bright red silty sh.

Cim. Anhyd 1797

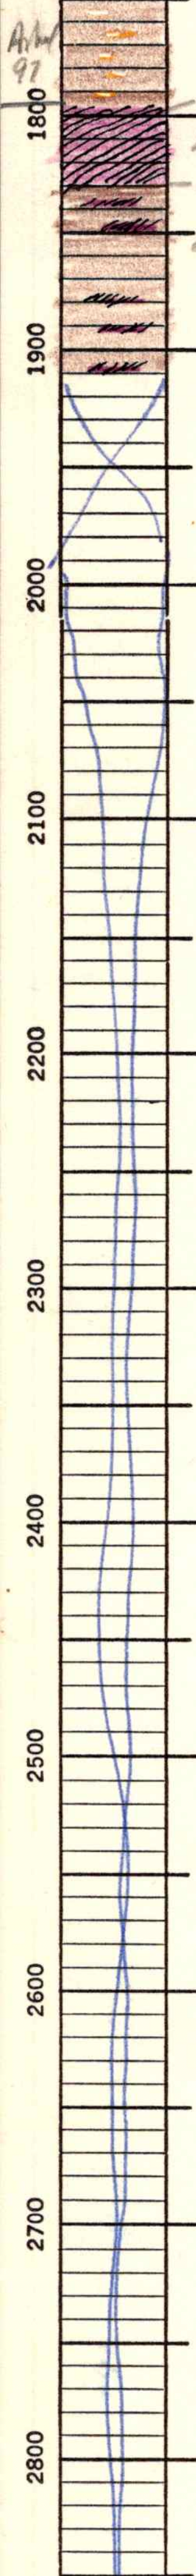

wh. & g, anhydrite

Streaks anhydrite
in rd sh.

Skip to 3400

480
885
1365



Scat occ & RP-fos in lt. g. suc to f. xln fos oy, sli dolo lst
dk. g sh on g-bf, dse lst

Wh & lt. g, dd. fos. oy lst

dk g to blk sh on bf, dd. xln. lst
v. col. vary. sh, sdy sh
Cream, dse. to lithographic lst.

lt. g, dd fos oy lst

Streak blk sh on bf, f. xln. lst.

wh, g & bf, suc. to f. xln, soft
Poor fos oy sh, dolo lst
fusulinids

Hbnr. Sh. 3848
Toronto 3865

48 blk sh
52 bf to cream dt. xln lst
56 bf

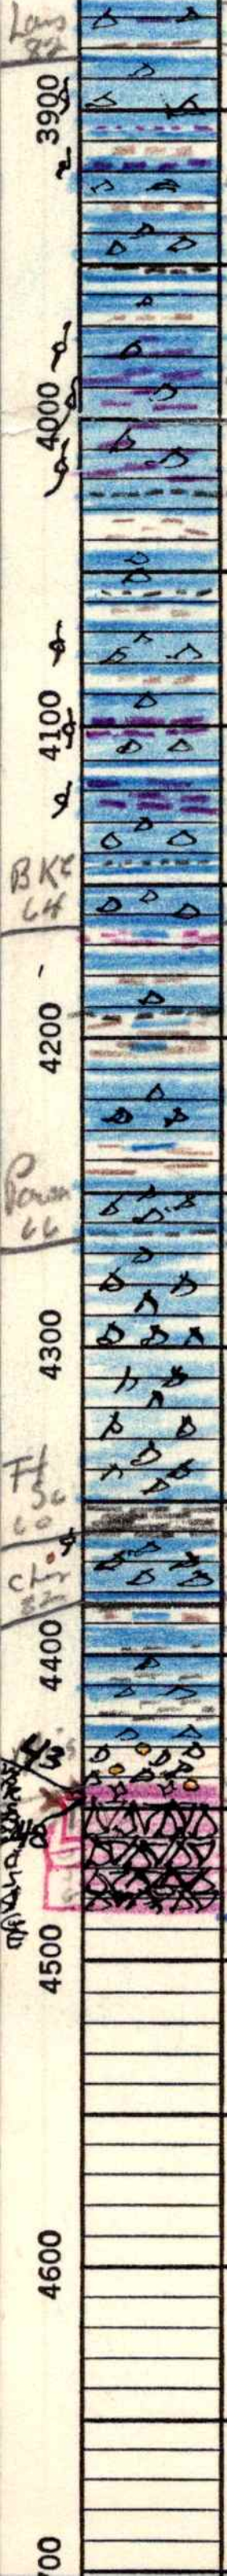

65 wh suc to f. Xln fos Δy sh dolo lst
78 v. cal. sh
82 wh to c, dd. Xln Δy lst. sh ooc
+ [illegible]

dk. g sh on bf, dse lst
v. cal sh

Ls 3882

c-lt. g, dd. Xln Δy lst. por ooc + dolomitic at top
v. cal sh
wh to c, dd. Xln Δy lst
dk. g sh on bf, dse lst
c-bf, dd. Xln sh Δy lst
v. cal sh
c-g, suc to f. Xln Δy sh, dolo lst
Zones fair to good ooc. por

dk. g sh on g-bf, dse lst
v. cal sh
wh to c, dd. Xln, Δy lst,
dk. g sh. on bf, dse lst
v. cal. sh
wh to g, dd. Xln, Δy lst - ool, in part
v. cal sh
wh to c, dd. Xln Δy lst. por. ooc, + dolomitic in part

lt. g, suc to f. Xln por ooc. dolo lst
c, dd. Xln Δy lst
dk. g sh. on bf, dse lst.
wh to c, dd. Xln. Δy lst
64 dk. g. lumpy sh
g-bf dse lst

BKC 4164

lt. g to bf, dse, sl. Δy lst
dk. g sh. on v. cal. lumpy sh
c-bf, dse lst
c, tan & bf, dd. Xln. Δy lst
v. cal sh. lumpy sh.
c, g, dd, Δy lst, sl. ~~[illegible]~~ p p por
66

Pawnee 4266

c, g + bf, d-f. gran, Δy, shdy. siliceous impure lst

Ft. Scott 4362

PBC 4429

51 dk. g. + blk sh
62 bf + brn dd. fos sl. sdy Δy lst. sl. oolitic, dk. oolites at top. Trace dk. oil stn
82 in 4370-80 sample
blk sh. on v. cal. lumpy sh.

c-g, dse to f. Xln partly Δy lst. with interbedded med. to dk g sh

29 v. cal. Δ in vg sdy clay + sh
43 trace oil stn in gd, suc, por fos dolo [illegible] 872
48

Miss 4443

dolo. wh. blocky, op to sub op fos Δ in lt. g to bf, f. Xln dolo, vuggy por. with spots fair + dead oil stn at top

T.D. 4485'