

Computer Inventoried

Well Name: Baker Farms #1
Company: Pentail Pet. LTD
Location: 19-33s-19w S/2 NW NW STATE CORPORATION COMMISSION
Comanche county Kansas
Date: 10-13-99

RECEIVED

MAR 14 2000

CONSERVATION DIVISION
Wichita, Kansas

TRILOBITE TESTING L.L.C.

OPERATOR : Pentail Pet, LTD.

DATE 10/04/199

WELL NAME: Baker farms #1

KB 1958.00 ft TICKET NO: 12314 DST #1

LOCATION : 19-33s-19w Comanche co KS

GR 1953.00 ft FORMATION: (upper)Miss.

INTERVAL : 5170.00 To 5260.00 ft

TD 5260.00 ft TEST TYPE: CONVENTIONAL

RECORDER DATA

Mins	Field	1	2	3	4	TIME DATA-----
PF 45 Rec.	10332	10332	3246			PF Fr. 0335 to 0420 hr
SI 45 Range(Psi)	4025.0	4025.0	4995.0	0.0	0.0	IS Fr. 0420 to 0505 hr
SF 90 Clock(hrs)	12	12	12			SF Fr. 0505 to 0635 hr
FS 90 Depth(ft)	5257.0	5257.0	5176.0	0.0	0.0	FS Fr. 0635 to 0805 hr

	Field	1	2	3	4	
A. Init Hydro	0.0	0.0	2583.0	0.0	0.0	T STARTED 0133 hr
B. First Flow	0.0	0.0	44.0	0.0	0.0	T ON BOTM 0332 hr
Bl. Final Flow	0.0	0.0	42.0	0.0	0.0	T OPEN 0335 hr
C. In Shut-in	0.0	0.0	1178.0	0.0	0.0	T PULLED 0805 hr
D. Init Flow	0.0	0.0	43.0	0.0	0.0	T OUT 0930 hr
E. Final Flow	0.0	0.0	54.0	0.0	0.0	
F. Fl Shut-in	0.0	0.0	1524.0	0.0	0.0	TOOL DATA-----
G. Final Hydro	0.0	0.0	2510.0	0.0	0.0	Tool Wt. 2100.00 lbs
Inside/Outside	O	O	I			Wt Set On Packer 20000.00 lbs
						Wt Pulled Loose 85000.00 lbs
						Initial Str Wt 78000.00 lbs
						Unseated Str Wt 78000.00 lbs
						Bot Choke 0.75 in
						Hole Size 7.88 in
						D Col. ID 2.25 in
						D. Pipe ID 3.80 in
						D.C. Length 294.00 ft
						D.P. Length 5392.00 ft

RECOVERY

Tot Fluid 125.00 ft of 125.00 ft in DC and 0.00 ft in DP
 5444.00 ft of Gas in pipe
 124.00 ft of Very slight gas cut mud 4% gas 96% mud
 0.00 ft of
 0.00 ft of
 0.00 ft of
 0.00 ft of
 0.00 ft of
 0.00 ft of

SALINITY 0.00 P.P.M. A.P.I. Gravity 0.00

BLOW DESCRIPTION

Initial Flow:

Fair blow built to bottom of bucket
 in 1 min. 40 secs.

Initial Shut-in:

Bled down for 3 mins. Very slight -
 blow back surface blow.

Final Flow:

Strong blow b.o.b in 30 sec.
 gas to surface in 4 min.

Final Shut-in:

Bled down for 10 mins. no blow back

MUD DATA-----

Mud Type	Chemical
Weight	9.10 lb/cf
Vis.	49.00 S/L
W.L.	10.40 in3
F.C.	0.32 in
Mud Drop N	

Amt. of fill	0.00 ft
Btm. H. Temp.	0.00 F
Hole Condition	Good
% Porosity	0.00
Packer Size	6.75 in
No. of Packers	2
Cushion Amt.	0.00 n
Cushion Type	no
Reversed Out N	
Tool Chased N	
Tester	Darren L. Amerine
Co. Rep.	Beth
Contr.	Pickerrll
Rig #	1
Unit #	no
Pump T.	none

AMPLES:
 ENT TO:

Test Successful: Y

*** TOOL DIAGRAM *** CONVENTIONAL

WELL NAME: Baker farms #1

LOCATION : 19-33s-19w Comanche co KS

TICKET No. 12314 D.S.T. No. 1 DATE 10/04/199

TOTAL TOOL TO BOTTOM OF TOP PACKERS

INTERVAL TOOL

BOTTOM PACKERS AND ANCHOR

TOTAL TOOL

DRILL COLLAR ANCHOR IN INTERVAL

D.C. ANCHOR STND.Stands Single Total H

D.P. ANCHOR STND.Stands Single Total H

TOTAL ASSEMBLY

D.C. ABOVE TOOLS.Stands Single Total H DEPTH 5170

D.P. ABOVE TOOLS.Stands Single Total H ANCHOR 22' of 5193

TOTAL DRILL COLLARS DRILL PIPE & TOOLS .. ||


TOTAL DEPTH

TOTAL DRILL PIPE ABOVE K.B.

REMARKS:

P.O. SUB Top of tool @	5143
C.O. SUB	5144
S.I. TOOL	5149
HMV	5154
JARS	5159
SAFETY JOINT	5161
PACKER	5165
PACKER	5170
STUBB 1'to	5171
Alpine rec.@ 5176	
	5193
	5193
62'of drillpipe to	5255
T.C. DEPTH	
	5255
Ak-1 rec @ 5257	
BULLNOSE 5' bullnose to T.D.	5260

CHART PAGE

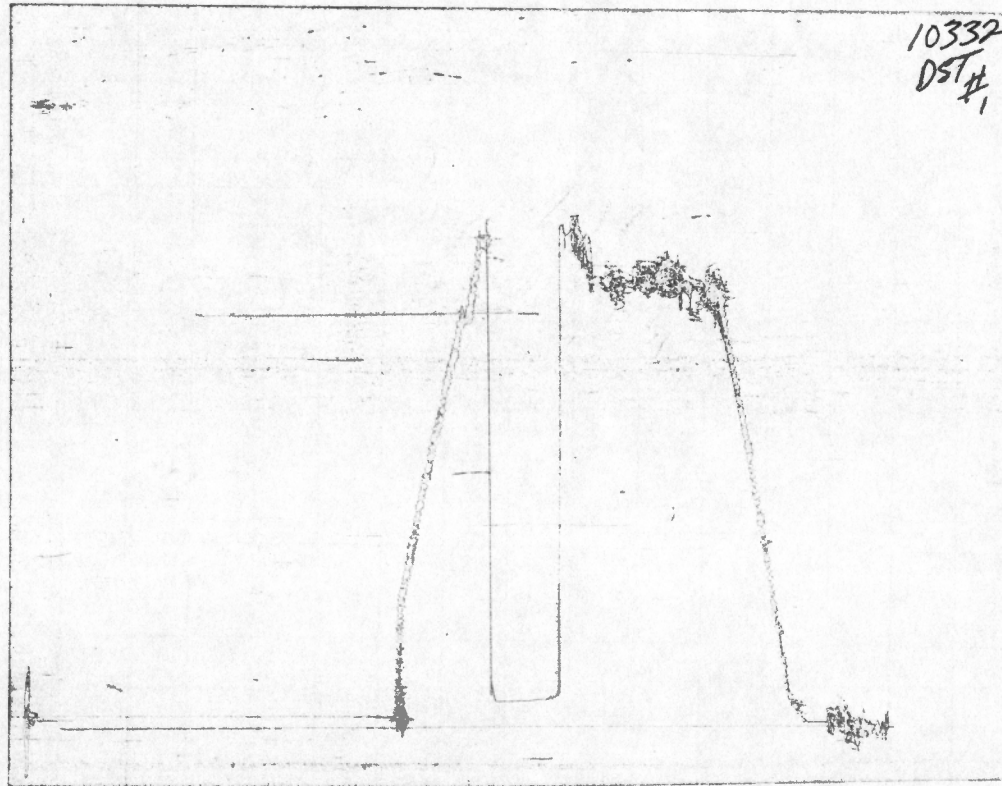

This is a photocopy of the actual AK-1 recorder chart

TRILOBITE TESTING L.L.C.

P.O. Box 362 • Hays, Kansas 67601

N^o 12314

Test Ticket

Well Name & No. <u>Baker Farms #1</u>	Test No. <u>#1</u>	Date <u>10/4/1999</u>
Company <u>Lintail Pet, Ltd.</u>	Zone Tested <u>(Upper) Miss</u>	
Address <u>225 N. Market, Ste. 300 Wichita, Ks 67202</u>	Elevation <u>1958</u>	KB <u>1958</u> GL
Co. Rep / Geo. <u>Beth Olsen</u>	Cont. <u>Pickell #1</u>	Est. Ft. of Pay <u> </u> Por. <u> </u> %
Location: Sec. <u>19</u>	Twp. <u>33S</u>	Rge. <u>19W</u>
Co. <u>Comanche</u>		State <u>Ks</u>
No. of Copies <u>5</u>	Distribution Sheet (Y, N) <u> </u>	Turnkey (Y, N) <u> </u>
Evaluation (Y, N) <u> </u>		

Interval Tested <u>5170' - 5260'</u>	Initial Str Wt./Lbs. <u>78000</u>	Unseated Str Wt./Lbs. <u>78000</u>
Anchor Length <u>90'</u>	Wt. Set Lbs. <u>20000</u>	Wt. Pulled Loose/Lbs. <u>85000</u>
Top Packer Depth <u>5165'</u>	Tool Weight <u>2100</u>	
Bottom Packer Depth <u>5170'</u>	Hole Size — 7 7/8" ☒	Rubber Size — 6 3/4" ☒
Total Depth <u>5260'</u>	Wt. Pipe Run <u>N/A</u>	Drill Collar Run <u>234'</u>
Mud Wt. <u>9.1</u> LCM <u>1#</u> Vis. <u>49</u> WL <u>10.4</u>	Drill Pipe Size <u>4 1/2 x H</u>	Ft. Run <u>5322'</u>

Blow Description TF: Fair blow built to b.o.b in 1 min 40 sec.
ISI: Bled down for 3 mins Very slight blow back. Surface blow
FF: Strong blow b.o.b in 30 sec. 675 in 4 min
FSL: Bled down for 10 min

Recovery — Total Feet <u>125'</u>	GIP <u>5444'</u>	Ft. in DC <u>125'</u>	Ft. in DP <u> </u>
Rec. <u>125'</u>	Feet Of <u>VS6CM</u>	4 %gas	%oil %water 96 %mud
Rec. <u>5444'</u>	Feet Of <u>6TP</u>	%gas	%oil %water %mud
Rec. <u> </u>	Feet Of <u> </u>	%gas	%oil %water %mud
Rec. <u> </u>	Feet Of <u> </u>	%gas	%oil %water %mud
Rec. <u> </u>	Feet Of <u> </u>	%gas	%oil %water %mud
BHT <u>126°</u>	°F Gravity <u> </u>	°API D@ <u> </u>	°F Corrected Gravity <u> </u> °API
RW <u> </u> @ <u> </u>	°F Chlorides <u> </u>	ppm Recovery <u> </u>	Chlorides <u>5000</u> ppm System

(A) Initial Hydrostatic Mud	AK-1 <u>Clock</u>	Alpine <u>2583</u>	PSI Recorder No. <u>3246</u>	T-On Location <u>0045</u>
(B) First Initial Flow Pressure	<u>5</u>	<u>44</u>	PSI (depth) <u>5176'</u>	T-Started <u>0133</u>
(C) First Final Flow Pressure	<u>+</u>	<u>42</u>	PSI Recorder No. <u>10332</u>	T-Open <u>0335</u>
(D) Initial Shut-In Pressure	<u>0</u>	<u>1178</u>	PSI (depth) <u>5257'</u>	T-Pulled <u>0805</u>
(E) Second Initial Flow Pressure	<u>P</u>	<u>43</u>	PSI Recorder No. <u> </u>	T-Out <u>0940</u>
(F) Second Final Flow Pressure	<u>P</u>	<u>54</u>	PSI (depth) <u> </u>	T-Off Location <u>1040</u>
(G) Final Shut-in Pressure	<u>e</u>	<u>1524</u>	PSI Initial Opening <u>45</u>	Test <u>✓</u>
(Q) Final Hydrostatic Mud	<u>d</u>	<u>2510</u>	PSI Initial Shut-in <u>45</u>	Jars <u>✓</u>
			Final Flow <u>90</u>	Safety Joint <u>✓</u>
			Final Shut-in <u>90</u>	Straddle <u> </u>
				Circ. Sub <u> </u>
				Sampler <u> </u>
				Extra Packer <u> </u>
				Elec. Rec. <u> </u>
				Mileage <u> </u>
				Other <u> </u>
				TOTAL PRICE \$ <u> </u>

TRILOBITE TESTING L.L.C. SHALL NOT BE LIABLE FOR DAMAGE OF ANY KIND OF THE PROPERTY OR PERSONNEL OF THE ONE FOR WHOM A TEST IS MADE, OR FOR ANY LOSS SUFFERED OR SUSTAINED, DIRECTLY OR INDIRECTLY, THROUGH THE USE OF ITS EQUIPMENT, OR ITS STATEMENTS OR OPINION CONCERNING THE RESULTS OF ANY TEST. TOOLS LOST OR DAMAGED IN THE HOLE SHALL BE PAID FOR AT COST BY THE PARTY FOR WHOM THE TEST IS MADE.

Approved By Beth A. Olsen
 Our Representative Darren J. Amerino

TRILOBITE TESTING L.L.C.

OPERATOR : Pintail Pet. LTD

DATE 10-5-99

WELL NAME: Baker Farms #1

KB 1958.00 ft

TICKET NO: 12315 DST #2

LOCATION : 19-33s-19w Comanche co KS

GR 1953.00 ft

FORMATION: Lower Mississippi

INTERVAL : 5264.00 To 5361.00 ft

TD 5361.00 ft

TEST TYPE: CONV

RECORDER DATA

Mins	Field	1	2	3	4	TIME DATA-----
PF 45 Rec.	10332	10332	10991			PF Fr. 0242 to 0327 hr
SI 45 Range (Psi)	4025.0	4025.0	4200.0	0.0	0.0	IS Fr. 0327 to 0412 hr
SF 90 Clock (hrs)	12	12	12			SF Fr. 0412 to 0542 hr
FS 90 Depth (ft)	5358.0	5358.0	5294.0	0.0	0.0	FS Fr. 0542 to 0712 hr

	Field	1	2	3	4	
A. Init Hydro	2640.0	2639.0	0.0	0.0	0.0	T STARTED 0030 hr
B. First Flow	71.0	71.0	0.0	0.0	0.0	T ON BOTM 0240 hr
B1. Final Flow	71.0	69.0	0.0	0.0	0.0	T OPEN 0242 hr
C. In Shut-in	720.0	724.0	0.0	0.0	0.0	T PULLED 0712 hr
D. Init Flow	81.0	79.0	0.0	0.0	0.0	T OUT 0900 hr
E. Final Flow	81.0	74.0	0.0	0.0	0.0	
F. Fl Shut-in	1266.0	1267.0	0.0	0.0	0.0	TOOL DATA-----
G. Final Hydro	2650.0	2639.0	0.0	0.0	0.0	Tool Wt. 2100.00 lbs
Inside/Outside	O	O	I			Wt Set On Packer 20000.00 lbs
						Wt Pulled Loose 85000.00 lbs
						Initial Str Wt 80000.00 lbs
						Unseated Str Wt 80000.00 lbs
						Bot Choke 0.75 in
						Hole Size 7.88 in
						D Col. ID 2.25 in
						D. Pipe ID 3.80 in
						D.C. Length 234.00 ft
						D.P. Length 5085.00 ft

RECOVERY

Tot Fluid 130.00 ft of 130.00 ft in DC and 0.00 ft in DP
 3908.00 ft of Gas in pipe
 130.00 ft of Very slight oil and gas cut mud
 0.00 ft of 10% gas 2% oil 88% mud
 0.00 ft of
 0.00 ft of
 0.00 ft of
 0.00 ft of
 0.00 ft of
 0.00 ft of

SALINITY 0.00 P.P.M. A.P.I. Gravity 0.00

BLOW DESCRIPTION

Initial Flow:
 Fair blow built to bottom of bucket
 in 9 mins.
 Initial Shut-in:
 Bled down for 3 mins. no blow back
 Final Flow:
 Strong blow built to bottom of
 bucket in 30 secs.
 Final Shut-in:
 Bled down for 10 mins. no blow back

SAMPLES:

SENT TO:

MUD DATA-----

Mud Type	Chemical
Weight	9.00 lb/c
Vis.	49.00 S/L
W.L.	8.80 in3
F.C.	0.00 in
Mud Drop	
Amt. of fill	0.00 ft
Btm. H. Temp.	126.00 F
Hole Condition	
% Porosity	0.00
Packer Size	6.75 in
No. of Packers	2
Cushion Amt.	0.00
Cushion Type	
Reversed Out	
Tool Chased	
Tester	Darren Amerine
Co. Rep.	Beth Isern
Contr.	Pickrell
Rig #	1
Unit #	
Pump T.	

Test Successful: Y

TRILOBITE TESTING L.L.C.

P.O. Box 362 • Hays, Kansas 67601

Nº 12315

Test Ticket

Well Name & No.	<u>Baker Farms #1</u>	Test No.	<u>#2</u>	Date	<u>10/5/1999</u>
Company	<u>Pintail Pet, LTD.</u>	Zone Tested	<u>(Lower) Miss.</u>		
Address	<u>225 N. Market St., 300 Wichita, Ks. 67202</u>		Elevation	<u>1958</u>	KB <u>1953</u> GL
Co. Rep / Geo.	<u>Beth Tserm</u>	Cont.	<u>Picknell #1</u>	Est. Ft. of Pay	Por. %
Location: Sec.	<u>19</u>	Twp.	<u>33S</u>	Rge.	<u>19W</u>
			Co.	<u>Comanche</u>	State <u>KS</u>
No. of Copies	<u>5</u>	Distribution Sheet (Y, N)	<u>—</u>	Turnkey (Y, N)	<u>—</u>
			Evaluation (Y, N)	<u>—</u>	

Interval Tested	<u>5264' - 5361'</u>	Initial Str Wt./Lbs.	<u>80,000</u>	Unseated Str Wt./Lbs.	<u>80,000</u>
Anchor Length	<u>97'</u>	Wt. Set Lbs.	<u>20,000</u>	Wt. Pulled Loose/Lbs.	<u>85,000</u>
Top Packer Depth	<u>5259</u>	Tool Weight	<u>2100</u>		
Bottom Packer Depth	<u>5264</u>	Hole Size — 7 7/8"	<u>✓</u>	Rubber Size — 6 3/4"	<u>✓</u>
Total Depth	<u>5361'</u>	Wt. Pipe Run	<u>N/A</u>	Drill Collar Run	<u>234'</u>
Mud Wt.	<u>9.0</u>	Drill Pipe Size	<u>4 1/2 XH</u>	Ft. Run	<u>5085'</u>
LCM	<u>2#</u>				
Vis.	<u>49</u>				
WL	<u>8.8</u>				

Blow Description IF: Fair blow built to b.o.b in 9 mins.
IST: Bled down for 3 mins. no blow back
FF: Strong blow built to b.o.b in 30 sec.
FST: Bled down for 10 mins. No blow back.

Recovery — Total Feet	<u>130'</u>	GIP	<u>3908'</u>	Ft. in DC	<u>130'</u>	Ft. in DP	
Rec.	<u>130'</u>	Feet Of	<u>VSOE6CM</u>	10 %gas	2 %oil	%water	<u>88%</u> mud
Rec.	<u>3908'</u>	Feet Of	<u>GTP</u>	%gas	%oil	%water	%mud
Rec.		Feet Of		%gas	%oil	%water	%mud
Rec.		Feet Of		%gas	%oil	%water	%mud
Rec.		Feet Of		%gas	%oil	%water	%mud
BHT	<u>126°</u>	°F Gravity		°API D@		°F Corrected Gravity	
RW		@		°F Chlorides		ppm Recovery	Chlorides <u>7,000</u> ppm System

(A) Initial Hydrostatic Mud	<u>2640</u>	AK-1	Alpine	PSI Recorder No.	<u>10991</u>	T-On Location	<u>2245'</u>
(B) First Initial Flow Pressure	<u>71</u>			PSI (depth)	<u>5294'</u>	T-Started	<u>0030</u>
(C) First Final Flow Pressure	<u>71</u>			PSI Recorder No.	<u>10332 *</u>	T-Open	<u>0242</u>
(D) Initial Shut-In Pressure	<u>720</u>			PSI (depth)	<u>5358'</u>	T-Pulled	<u>0712</u>
(E) Second Initial Flow Pressure	<u>81</u>			PSI Recorder No.		T-Out	<u>0900</u>
(F) Second Final Flow Pressure	<u>81</u>			PSI (depth)		T-Off Location	<u>1000</u>
(G) Final Shut-in Pressure	<u>1266</u>			PSI Initial Opening	<u>45</u>	Test	<u>✓</u>
(Q) Final Hydrostatic Mud	<u>2650</u>			PSI Initial Shut-in	<u>45</u>	Jars	<u>✓</u>
				Final Flow	<u>90</u>	Safety Joint	<u>✓</u>
				Final Shut-in	<u>90</u>	Straddle	

TRILOBITE TESTING L.L.C. SHALL NOT BE LIABLE FOR DAMAGE OF ANY KIND OF THE PROPERTY OR PERSONNEL OF THE ONE FOR WHOM A TEST IS MADE, OR FOR ANY LOSS SUFFERED OR SUSTAINED, DIRECTLY OR INDIRECTLY, THROUGH THE USE OF ITS EQUIPMENT, OR ITS STATEMENTS OR OPINION CONCERNING THE RESULTS OF ANY TEST. TOOLS LOST OR DAMAGED IN THE HOLE SHALL BE PAID FOR AT COST BY THE PARTY FOR WHOM THE TEST IS MADE.

Approved By Beth A. Tserm

Our Representative Dawn J. Corneio

Mileage

Other

TOTAL PRICE \$

TRILOBITE TESTING L.L.C.

OPERATOR : Pintail Pet. LTD DATE 10-8-99
 WELL NAME: Baker Farms #1 KB 1958.00 ft TICKET NO: 12316 DST #3
 LOCATION : 19-33s-19w Comanche co KS GR 1953.00 ft FORMATION: Viola
 INTERVAL : 6026.00 To 6116.00 ft TD 6116.00 ft TEST TYPE: CONV

RECORDER DATA

Mins	Field	1	2	3	4	TIME DATA-----
PF 30 Rec.	10991	10991	10332			PF Fr. 1203 to 1233 hr
SI 30 Range(Psi)	4200.0	4200.0	4025.0	0.0	0.0	IS Fr. 1233 to 1303 hr
SF 60 Clock(hrs)	12	12	12			SF Fr. 1303 to 1403 hr
FS 60 Depth(ft)	6049.0	6049.0	6113.0	0.0	0.0	FS Fr. 1403 to 1503 hr

	Field	1	2	3	4	
1. Init Hydro	3046.0	3030.0	0.0	0.0	0.0	T STARTED 0930 hr
2. First Flow	53.0	55.0	0.0	0.0	0.0	T ON BOTM 1200 hr
3. Final Flow	53.0	55.0	0.0	0.0	0.0	T OPEN 1203 hr
4. In Shut-in	202.0	207.0	0.0	0.0	0.0	T PULLED 1503 hr
5. Init Flow	53.0	55.0	0.0	0.0	0.0	T OUT hr
6. Final Flow	53.0	55.0	0.0	0.0	0.0	
7. Fl Shut-in	586.0	605.0	0.0	0.0	0.0	TOOL DATA-----
8. Final Hydro	3057.0	3010.0	0.0	0.0	0.0	Tool Wt. 2100.00 lbs
Inside/Outside	0	0	I			Wt Set On Packer 20000.00 lbs
						Wt Pulled Loose 0.00 lbs
						Initial Str Wt 85000.00 lbs
						Unseated Str Wt 0.00 lbs
						Bot Choke 0.75 in
						Hole Size 7.88 in
						D Col. ID 2.25 in
						D. Pipe ID 3.80 in
						D.C. Length 234.00 ft
						D.P. Length 5832.00 ft

RECOVERY

Pot Fluid 65.00 ft of 65.00 ft in DC and 0.00 ft in DP
 1800.00 ft of Gas in pipe
 55.00 ft of Slight gas cut mud 4% gas 96% mud
 0.00 ft of
 0.00 ft of
 0.00 ft of
 0.00 ft of
 0.00 ft of
 0.00 ft of

SALINITY 0.00 P.P.M. A.P.I. Gravity 0.00

MUD DATA-----

Mud Type	Chemical
Weight	0.00 lb/cf
Vis.	0.00 S/L
W.L.	0.00 in3
F.C.	0.00 in
Mud Drop	

BLOW DESCRIPTION

Initial flow:
 Weak blow built to 3 1/2" in water
 bucket

Initial Shut-in:
 Bled down for 2 mins.

Final Flow:
 Strong blow built to 7" in water
 bled down built back to bottom of
 bucket in 45 mins.

Final Shut-in:
 Bled down for 2 mins. no blow back

Amt. of fill	0.00 ft
Btm. H. Temp.	124.00 F
Hole Condition	
% Porosity	0.00
Packer Size	6.75 in
No. of Packers	2
Cushion Amt.	0.00
Cushion Type	
Reversed Out	
Tool Chased	

SAMPLES:

SENT TO:

Tester Darren Amerine
 Co. Rep. Beth Isern
 Contr. Pickrell
 Rig # 1
 Unit #
 Pump T.

Test Successful: Y

TRILOBITE TESTING L.L.C.

P.O. Box 362 • Hays, Kansas 67601

Nº 12316

Test Ticket

Well Name & No. <u>Baker Farms #1</u>	Test No. <u>#3</u>	Date <u>10/08/1999</u>
Company <u>Pintail Pet, LTD</u>	Zone Tested <u>Viola</u>	
Address <u>225 N. Market St. 300 Wichita Kc. 67202</u>	Elevation <u>1958</u>	KB <u>1953</u> GL
Co. Rep / Geo. <u>Beth Isern</u>	Cont. <u>Pickrell #1</u>	Est. Ft. of Pay <u> </u> Por. <u> </u> %
Location: Sec. <u>19</u>	Twp. <u>33S</u>	Rge. <u>19W</u> Co. <u>Comanche</u> State <u>Ks</u>
No. of Copies <u>5</u>	Distribution Sheet (Y, N) <u> </u>	Turnkey (Y, N) <u> </u> Evaluation (Y, N) <u> </u>

Interval Tested 6026' - 6116' Initial Str Wt./Lbs. 85,000 Unseated Str Wt./Lbs.
Anchor Length 90' Wt. Set Lbs. 20,000 Wt. Pulled Loose/Lbs.
Top Packer Depth 6021' Tool Weight 2100
Bottom Packer Depth 6026' Hole Size — 7 7/8" ✓ Rubber Size — 6 3/4" ✓
Total Depth 6116' Wt. Pipe Run N/A Drill Collar Run 234'
Mud Wt. LCM Vis. WL Drill Pipe Size 4 1/2 x H Ft. Run 5832'
Blow Description TF: Weak blow built to 3 1/2" in H2O bucket
IST: Bled down for 2 mins.
FF: Strong blow built to 7" in H2O Bled down built back to 6.6 in 45"
FSI: Bled down for 2 mins no blow back.

Recovery — Total Feet 65' GIP 1800' Ft. in DC 65' Ft. in DP
Rec. 65' Feet Of 156CM 4 %gas %oil %water 96 %mud
Rec. 1800' Feet Of 6TP %gas %oil %water %mud
Rec. Feet Of %gas %oil %water %mud
Rec. Feet Of %gas %oil %water %mud
Rec. Feet Of %gas %oil %water %mud
BHT 124° °F Gravity °API D@ °F Corrected Gravity °API
RW @ °F Chlorides ppm Recovery Chlorides ppm System

	AK-1	Alpine
(A) Initial Hydrostatic Mud	<u>3046</u>	
(B) First Initial Flow Pressure	<u>53</u>	
(C) First Final Flow Pressure	<u>53</u>	
(D) Initial Shut-In Pressure	<u>202</u>	
(E) Second Initial Flow Pressure	<u>53</u>	
(F) Second Final Flow Pressure	<u>53</u>	
(G) Final Shut-in Pressure	<u>586</u>	
(Q) Final Hydrostatic Mud	<u>3057</u>	

PSI Recorder No.	<u>10991</u>	T-On Location	<u>0715</u>
PSI (depth)	<u>6049'</u>	T-Started	<u>0930</u>
PSI Recorder No.	<u>10332</u>	T-Open	<u>1203</u>
PSI (depth)	<u>6113'</u>	T-Pulled	<u>1503</u>
PSI Recorder No.	<u> </u>	T-Out	<u> </u>
PSI (depth)	<u> </u>	T-Off Location	<u> </u>
PSI Initial Opening	<u>30</u>	Test	<u>✓</u>
PSI Initial Shut-in	<u>30</u>	Jars	<u>✓</u>
Final Flow	<u>60</u>	Safety Joint	<u>✓</u>
Final Shut-in	<u>60</u>	Straddle	<u> </u>
		Circ. Sub	<u> </u>
		Sampler	<u> </u>
		Extra Packer	<u> </u>
		Elec. Rec.	<u> </u>
		Mileage	<u> </u>
		Other	<u> </u>
		TOTAL PRICE \$	<u> </u>

TRILOBITE TESTING L.L.C. SHALL NOT BE LIABLE FOR DAMAGE OF ANY KIND OF THE PROPERTY OR PERSONNEL OF THE ONE FOR WHOM A TEST IS MADE, OR FOR ANY LOSS SUFFERED OR SUSTAINED, DIRECTLY OR INDIRECTLY, THROUGH THE USE OF ITS EQUIPMENT, OR ITS STATEMENTS OR OPINION CONCERNING THE RESULTS OF ANY TEST. TOOLS LOST OR DAMAGED IN THE HOLE SHALL BE PAID FOR AT COST BY THE PARTY FOR WHOM THE TEST IS MADE.

Approved By

Our Representative

Beth A. Isern
Dawn L. Isern