


25-11-8E

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company- CITIES SERVICE OIL COMPANY
Farm- Yaeger No. 12

SEC. 25 T. 11 R. 8E
SE SE SE

Total Depth. 1690'
Date 2-1-60 Comp. 2-6-60
Shot or Treated.
Contractor White & Ellis Drilling Co.
Log No. 94-17-60

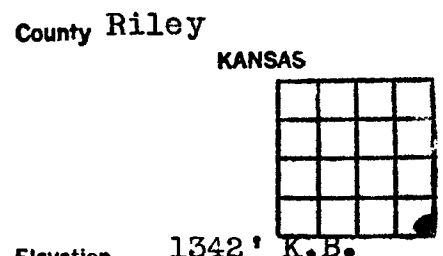

Elevation. 1342' K.B.

CASING:
8 5/8" @ 234' w/200 sks. cem.
5 1/2" @ 1670' w/120 sks. cem.

Production. 121 BOPD &
34 BWPD

Figures indicate Bottom of Formations.

lime	16	Fort Scott		
shale	25	Limestone	1558	1559
lime	50	Base Fort Scott		
shale	60	Limestone	1608	
conglomerate	70	Pennsylvania Shale		
lime, hole full of water	100	Conglomerate	1620	1620
shale	110	Base Pennsylvania		
lime	115	Shale		
shale	120	Conglomerate	1668	
lime	130	Hunton Limestone	1668	1668
shale,	135			
lime	195			
shale	205			
lime	234	Drill Stem Test		
shale & lime strks.	330	#1	1670-1685	
shale & shells	365		(15' anchor)	
lime & shale strks,	560			
shale & shells	641			
shale	850	Ran Schlumberger Laterolog		
lime & shale	940	and Microlaterolog.		
shale	978			
lime	1010			
shale	1175			
lime & shale	1257			
lime	1260			
gypsum shale & shells	1281			
lime	1517			
lime & shale	1625			
shale & lime strks.	1668			
lime, odor	1685			
lime	1690	RTD		
Total Depth				

TOPS:		SCOUT TOPS
Topeka Limestone	709	709
Base Topeka Limestone	742	
Deer Creek Limestone	785	
Base Deer Creek Limestone	828	
Lecompton Limestone	848	
Base Lecompton Limestone	892	
Oread Limestone	978	
Heenber Shale	1010-1019	1010
Base Oread	1022	
Douglas Sand	1030	
Base Douglas Sand	1177	
Lansing Limestone	1177	1177
Base Lansing Limestone	1258	
Kansas City Limestone	1281	1281
Base Kansas City Limestone	1517	1517
Pawnee Limestone	1542	
Base Pawnee Limestone	1551	