

KANSAS DRILLERS LOG

15-197-2007a  
19-12-11E


API No. 15 — 197 — 20072  
County Number

S. 18 T. 12S R. 11E E W

Loc. SE SW SE

County Wabaunsee

640 Acres  
N



Locate well correctly

Elev.: Gr. 1266

DF 1268 KB 1270

Operator

Hoover & Bracken, Inc.

Address

3232 Liberty Tower Oklahoma City, Oklahoma

Well No.

1

Lease Name

Steuwe

Footage Location

330 feet from (N) (S) line 1650 feet from (E) (W) line

Principal Contractor

Brandt Drilling Co., Inc.

Geologist

Ivan L. Stuber

Spud Date

2-1-78

Total Depth

3175

P.B.T.D.

Date Completed

2-11-78

Oil Purchaser

CASING RECORD

Report of all strings set—surface, intermediate, production, etc.

Purpose of string	Size hole drilled	Size casing set (in O.D.)	Weight lbs/ft.	Setting depth	Type cement	Sacks	Type and percent additives
Surface	11"	8 5/8"	28	208	common	100	3% chloride
Production	7 7/8"	5 1/2"		3173	common	75	

LINER RECORD

PERFORATION RECORD

Top, ft.	Bottom, ft.	Sacks cement	Shots per ft.	Size & type	Depth interval

Size	Setting depth	Packer set at

ACID, FRACTURE, SHOT, CEMENT SQUEEZE RECORD

Amount and kind of material used	Depth interval treated

INITIAL PRODUCTION

Date of first production		Producing method (flowing, pumping, gas lift, etc.)			
RATE OF PRODUCTION PER 24 HOURS	Oil	Gas	Water	Gas-oil ratio	
	bbls.	MCF	bbls.	CFPB	
Disposition of gas (vented, used on lease or sold)			Producing interval (s)		

INSTRUCTIONS: As provided in KCC Rule 82-2-125, within 90 days after completion of a well, one completed copy of this Drillers Log shall be transmitted to the State Geological Survey of Kansas, 4150 Monroe Street, Wichita, Kansas 67209. Copies of this form are available from the Conservation Division, State Corporation Commission, 3830 So. Meridian (P.O. Box 17027), Wichita, Kansas 66217. Phone AC 316-522-2206. If confidential custody is desired, please note Rule 82-2-125. Drill Logs will be on open file in the Oil and Gas Division, State Geological Survey of Kansas, Lawrence, Kansas 66044.

operator

18-12 S-11E

DESIGNATE TYPE OF COMP.: OIL, GAS, DRY HOLE, SWDW, ETC.:

Hoover & Bracken, Inc.

oil

Well No. 1	Lease Name Steuwe
S <u>18</u> T <u>12</u> S R <u>11</u> E W Wabaunsee County, Kansas	


WELL LOG

Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries.

SHOW GEOLOGICAL MARKERS, LOGS RUN, OR OTHER DESCRIPTIVE INFORMATION.

FORMATION DESCRIPTION, CONTENTS, ETC.	TOP	BOTTOM	NAME	DEPTH
Lime, cherty	0	76		
Sand and chert	76	106		
Lime	106	286		
Shale w/ lime stks.	286	450		
Lime & shale	450	771		
Shale w/ lime stks.	771	1050		
Shale w/ lime stks.	1050	1160		
Lime, chalky	1160	1180		
Shale	1180	1190		
Sand & sandy shale	1190	1335		
Lime, xln & chalky	1335	1765	Lansing	
Shale & sandy shale	1765	1849		
Lime, cherty	1849	1984		
Shale	1984	1989		
Sand, mica. & silty	1989	2070		
Shale, sand & lime	2070	2410		
Lime, cherty lime	2410	2681	Miss.	
Shale, gray green	2681	2835	Kh.	
Dolomite, porous	2835	3069	Hunton	
Shale, limey	3069	3173	Maq.	
Dolomite, xln porous	3173	3175	Viola	
RTD	3175			

USE ADDITIONAL SHEETS, IF NECESSARY, TO COMPLETE WELL RECORD.

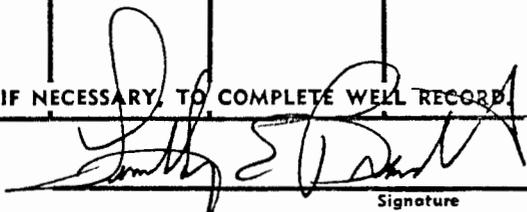Date Received	 Signature General Mgr. Title 2-28-78 Date