

SEEDING
SODDING
LANDSCAPING

WAYNE POSTOAK
OWNER



Postoak Co.

28-12-21E

BOX 194
LAWRENCE, KS

913/842-9611

AMERICAN
INDIAN

Computer Inventoried

July 30, 1981

T.G. Wright
Consulting Engineer
530 Fourth Financial Center
Wichita, KS 67202

Mr. Wright:

Please find enclosed the information we discussed Thursday morning on the telephone. If you have any further information concerning this project, please contact me.

Also, since you have previously worked on this project, if you are interested in working with us as our Consulting Geologist, please send me your estimates. Thank you for your cooperation.

Sincerely,

Allen Fender

Allen Fender
913/842-9611

af/gp

af/gp
Enclosure

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
500 INSURANCE BUILDING
212 NORTH MARKET
WICHITA 2, KANSAS

Form CP-1

WELL PLUGGING APPLICATION FORM
File One Copy

Lease Owner Tom Holden
(Applicant)
Address Wakeeney, Kansas

Lease (Farm Name) Neis Well No. 1

Well Location N/2 E/2 Sec. 28 Twp. 12 Rge. 21 E (E) (W)

County Douglas Field Name (If any) _____

Total Depth 1028 Oil Well _____ Gas Well _____ Input Well _____ SWD Well _____ D & A dry

Has well log filed with application? no If not, explain: _____

to be filed with plugging report.

Date and hour plugging is desired to begin Oct. 29, 1965 5:PM.

Plugging of the well will be done in accordance with the Rules and Regulations of the State Corporation Commission.

Name of the person on the lease in charge of well owner _____

Eugene Smith Address Caney, Kansas

Plugging Contractor Smith Drilling Company License No. 387

Address Caney, Kansas

Invoice covering assessment for plugging this well should be sent to _____

Tom Holden Address Wakeeney, Kansas

and payment will be guaranteed by applicant.

Signed: Tom Holden
Applicant or Acting Agent

Date: Oct. 29, 1965

*Submitted to Smith
8-26-66*

67

State of Kansas



WM. H. AVERY Governor
 WILLIAM L. MITCHELL Chairman
 JAMES O. GREENLEAF Commissioner
 HARRY G. WILES Commissioner
 RAYMOND B. HARVEY Secretary
 E. EDWARD JOHNSON Gen. Counsel

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)
 500 Insurance Bldg. 212 N. Market
 WICHITA, KANSAS 67202

November 2, 1965.

WELL PLUGGING AUTHORITY


	Well No.	1
	Lease	Neis
	Description	N/2 E/2 28-12-21E
Tom Holden	County	Douglas
Wakeeney,	Total Depth	1028'
Kansas	Plugging Contractor	Smith Drlg., Company Caney, Kansas

Gentlemen:

This is your authority to plug the above subject well in accordance with the Rules and Regulations of the State Corporation Commission.

This authority is void after 90 days from the above date.

Very truly yours,


 J. P. Roberts, Administrator

Mr. O. D. Garrett - R. R. #1 - Wellsville, Kansas
 is hereby assigned to supervise the plugging of the above
 named well.

State of Kansas



WM. H. AVERY Governor
WILLIAM L. MITCHELL Chairman
JOHN C. WOELK Commissioner
HARRY G. WILES Commissioner
RAYMOND B. HARVEY Secretary
EDWARD JOHNSON Gen. Counsel

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)
500 Insurance Bldg. 212 N. Market
WICHITA, KANSAS 67202

VERBAL PERMIT FORM
(To Be Filed By Plugging Agent)

J. P. Roberts
Administrator
500 Insurance Building
Wichita 2, Kansas

Dear Sir:

Mr. Holden of Smith Drlg. Co. has this

date requested permission to plug the following described well:

Mr. Holden guarantees payment of the plugging fee.

Operator's full Name: Tom Holden

Complete Address: Wakeeney, Kansas

Lease Name: Neis Well No. 1

Location: N/2 E/2 Sec. 28 Twp. 12 Rge. 21E (E)(W)

County Douglas Total Depth 1028 Oil Well

Gas Well Input Well SWD Well D & A Lost Hole

Mr. Holden was instructed to plug the well as follows:

Fill back to 750' with 40 viscosity mud and run 10 sacks
cement, mud to 246' and bridge and run 15 sacks cement,
mud to 65' and bridge and run 6 sacks cement, mud to 10'
and bridge and run 2 sacks cement, cut surface off below
plow and fill to surface.

Very truly yours,

O. D. Garrett
Conservation Division Agent

T. G. WRIGHT
CONSULTING GEOLOGIST
805 WICHITA PLAZA
WICHITA, KANSAS 67202

28-12-21E P

November 4, 1965

Re: GEOLOGICAL WELL REPORT
Tom Holden #1 Nies, ✓
C N/2 NE SE Section 28-T12S-R21E,
Wildcat, Douglas County, Kansas
Contractor: Eugene Smith Drilling C
Abandoned 10/29/65
Total Depth: 1028'

Mr. Tom Holden
305 N. 13th Street
Wakeeney, Kansas

Dear Sir:

Following is the top of the Mississippian Limestone and a description of a position of the Cherokee section, the drilling of which was witnessed by me after you moved in rotary tools at 750 feet.

Enclosed herewith is a copy of the plotted drilling time log from 780 to 1028 feet total depth with a description of the lithology. I arrived at the well at a depth of 875 feet and witnessed the operation to 1028 feet total depth.

Geological Tops

ELEVATION: 800 (Estimated from topographic sheet)

CHEROKEE SANDS

780 - 905 More or less solid sand body. Sandstone white, medium grained porous, no show of oil or gas.

930 - 940 Medium fine, white, porous sandstone. No show of oil or gas.

MISSISSIPPIAN LIMESTONE 990 (-190)

990 - 992 Chert white to yellowish and pink, vitreous.

992 -1000 Dolomite tan to light gray, finely crystalline, non-porous.

Mr. Tom Holden

#1 Nies

Page Two


1000-1014 Limestone, tan to buff, coarsely crystalline,
fossiliferous, non-porous.

1014-1028 Dolomite, tan to buff, sucrosic to coarsely crystal-
line, cavernous. Good porosity, no show of oil or
gas.

TOTAL DEPTH 1028


On the top of the Mississippian Limestone the subject well
appears structurally normal to perhaps somewhat lower than normal.
No shows exist through the section observed and it was recommended
that the hole be abandoned as dry.

Yours very truly,

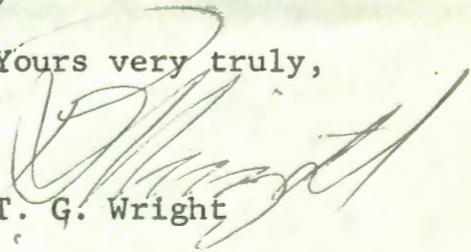

T. G. Wright

107

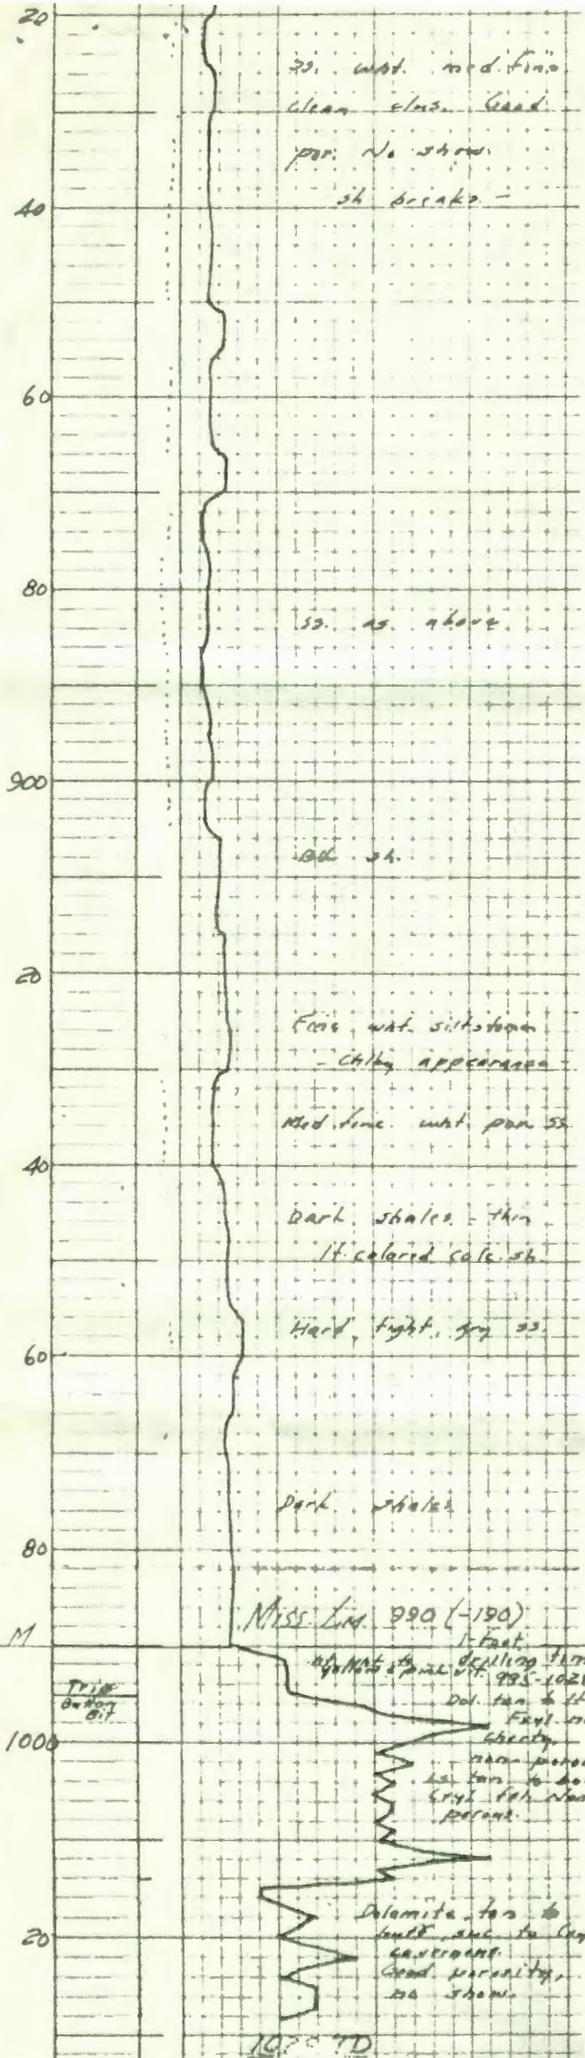

STATE
KANSAS

COUNTY
DOUGLAS

BLOCK
28

REC.
28

T. 12S. R. 21E.

COMPANY
TOM HOLDEN

FARM
ROBERT NIES

WELL NO.
1

SURVEY
CN 2 N 6 SE

TOTAL DEPTH
1028

CONTRACTOR
Eugene Smith Drilling Co

COMMENCED

COMPLETED
10-29-65

REMARKS
**Cable Tool hole drilled
deeper by rotary 750-1028
GEOLOGIST: T.G. Wright**


ALTITUDE
800 Est.

PRODUCTION
D & A.

CASING RECORD

10'		
8 1/4'		
20'		
15 1/4'		
12 1/4'		
SHOT	QUARTS	BETWEEN

TIME RATE SCALE: 1/10" = MINUTES

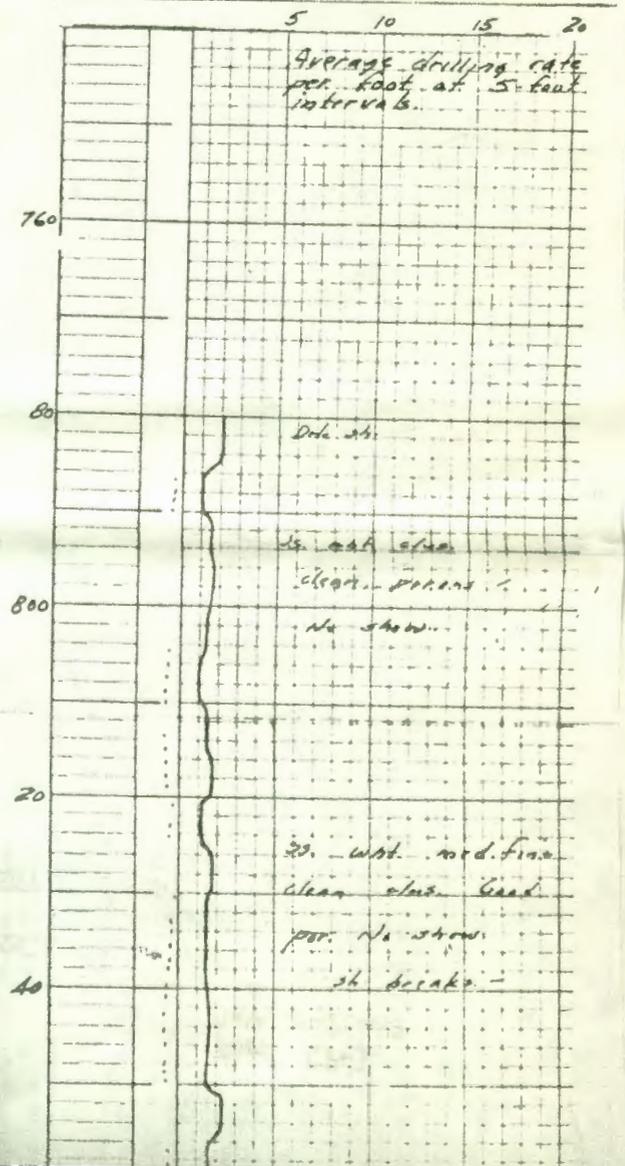


6P

WELL PLUGGING RECORD

ation Completely
Affidavit
er Report to:
vation Division
Corporation Commission
No. Market
Wichita, Kansas

NORTH

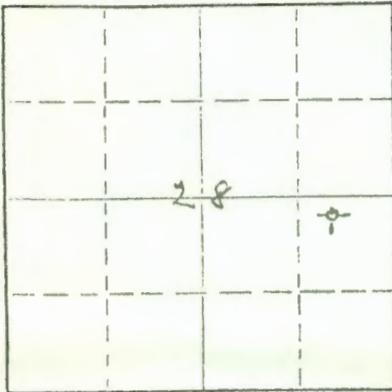

Locate well correctly on above
Section Plat

Douglas County, Sec. 28 Twp. 12^s Rge. 21 (E) (W)

Location as "NE/CNW/SW" or footage from lines _____

Lease Owner Tom Holden

Lease Name Robert Niles Well No. 1

Office Address 305 N - 13th

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 10-29 1965

Application for plugging filed 10-29 1965

Application for plugging approved 10-29 1965

Plugging commenced 10-29 1965

Plugging completed 10-30 1965

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well O. D. Garrett

Producing formation Squad + Bates + Mass. Depth to top _____ Bottom 1028 Total Depth of Well 1028 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
<u>Sand</u>		<u>surface</u>	<u>50</u>	<u>8</u>		<u>lift in</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 750 feet to surface feet for each plug set.

Hole was full of Rotary mud
10 sack cement @ 250'
13 " " " 246'
6 " " " 63'
2 " " " 10'

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Eugene Smith
 Address P.O. Box 343 Conroy Kansas

STATE OF KANSAS COUNTY OF TREGO, ss.
TOM HOLDEN (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Tom Holden

SUBSCRIBED AND SWORN TO before me this 10th day of November 1966

My commission expires official
David L. Rhodes (Address)
Probate Judge Notary Public.