

Recommended Shot, Qts./Ft.


Permeability, Millidarcys

Percent Water Sat.

Percent Porosity

Oil Content, Bbls./A.Ft.

0 2 4 340 320 300 280 260 240 220 200 180 160 140 120 100 80 60 40 20 0 Fm. Log Depth Feet Percent Oil Sat. 80 60 40 20 0 10 20 30 0 200 400 600 800 1000 1200

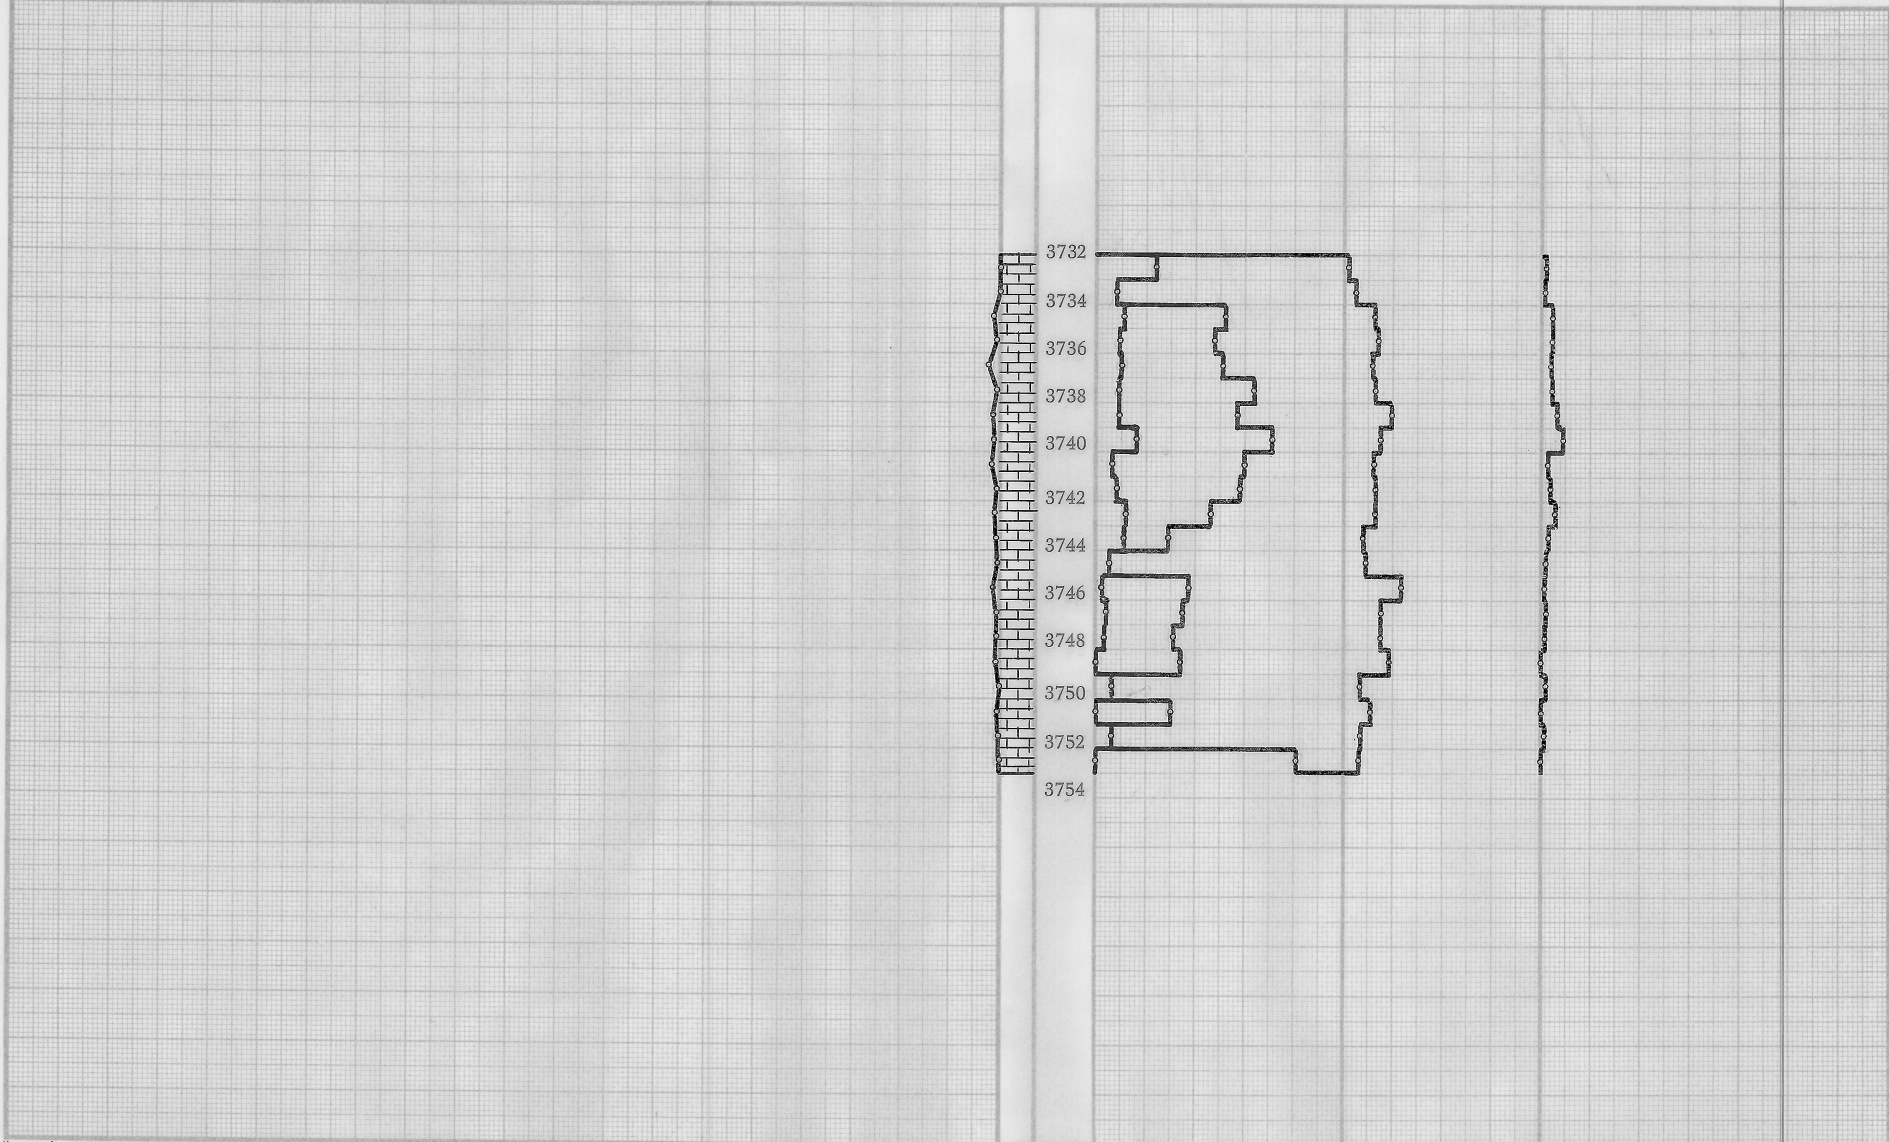

Sec.	Sand	Depth, Feet		Net Ft. of Sand	Avg. Por.	Average Core Sat.		Core Oil Content		Permeability		Flood Pot Residuals			
		From	To			Oil	Water	Avg. B./A.Ft.	Total Bbl./Ac.	Avg. Mds.	Capacity Ft. x Md.	Saturation		Oil Content	
												Oil	Water	B./A.Ft.	Bbl./Ac.
1	LANSING-KANSAS CITY LIMESTONE	3734	3743	9	6.9	10	44	54	490	1.8	16.	11	83	59	530
2	Oil-Water	3743	3749	6	7.5	4	71	23	140	0.8	4.8	--	--	--	--

COMPANY C. W. OLIPHANT  
 LEASE Enderud WELL NO. 1  
 LOCATION SW SW  
 SEC. 16 T. 35S R. 3W COUNTY Sumner  
 STATE Kansas DATE 6-27-66  
 EARLOUGHER ENGINEERING TULSA, OKLAHOMA

*Enderud*