


28-4s-30w



TRILOBITE
TESTING, INC.

DRILL STEM TEST REPORT

Prepared For: **Rons Oil Operations Inc**

1889 200th Ave.
Penokee KS 67659

ATTN: Richard Bell

28-4-30 Decatur KS

Watson #~~28~~-1 - 28-1

Start Date: 2005.11.14 @ 03:05:29

End Date: 2005.11.14 @ 10:10:08

Job Ticket #: 22594 DST #: 1

15-039-20951-00-00

RECEIVED
JUN 29 2006
KCC WICHITA

Trilobite Testing, Inc

PO Box 362 Hays, KS 67601

ph: 785-625-4778 fax: 785-625-5620

Rons Oil Operations Inc


Watson #28-1

28-4-30 Decatur KS

DST # 1

B-C-D

2005.11.14



TRILOBITE TESTING, INC.

DRILL STEM TEST REPORT

Rons Oil Operations Inc
 1889 200th Ave.
 Penokee KS 67659
 ATTN: Richard Bell

Watson #28-1

28-4-30 Decatur KS

Job Ticket: 22594

DST#: 1

Test Start: 2005.11.14 @ 03:05:29

GENERAL INFORMATION:

Formation: **B-C-D**
 Deviated: No Whipstock: ft (KB)
 Time Tool Opened: 05:01:24
 Time Test Ended: 10:10:08

Test Type: Conventional Bottom Hole
 Tester: Shane McBride
 Unit No: 25

Interval: **3982.00 ft (KB) To 4024.00 ft (KB) (TVD)**
 Total Depth: 4024.00 ft (KB) (TVD)
 Hole Diameter: 7.88 inches Hole Condition: Fair

Reference Elevations: 2876.00 ft (KB)
 2871.00 ft (CF)
 KB to GR/CF: 5.00 ft

Serial #: 6798

Inside

Press@RunDepth: 698.94 psig @ 3983.00 ft (KB)

Start Date: 2005.11.14

End Date: 2005.11.14

Start Time: 03:05:29

End Time: 10:04:08


Capacity: 7000.00 psig

Last Calib.: 2005.11.14

Time On Btm: 2005.11.14 @ 05:00:54

Time Off Btm: 2005.11.14 @ 07:50:39

TEST COMMENT: B.O.B in 2 1/2 min.
 No return
 B.O.B. in 3 min.
 No return

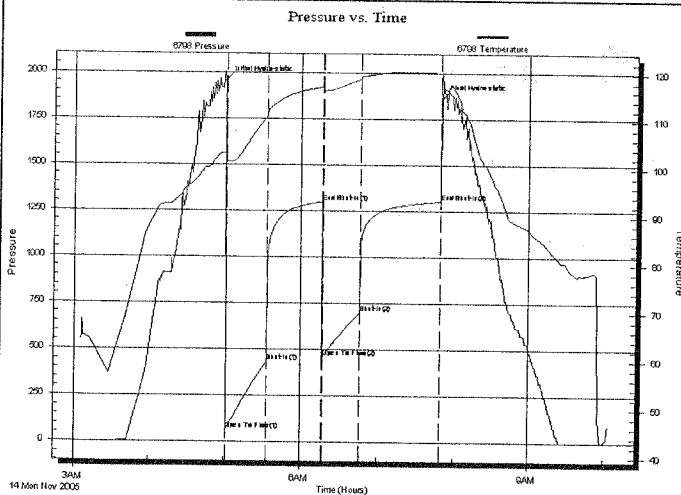

PRESSURE SUMMARY


Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	1956.19	103.40	Initial Hydro-static
1	64.65	101.66	Open To Flow (1)
33	431.70	111.01	Shut-In(1)
76	1296.63	117.05	End Shut-In(1)
77	455.72	116.45	Open To Flow (2)
106	698.94	118.81	Shut-In(2)
169	1300.52	120.14	End Shut-In(2)
170	1862.25	119.85	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)
300.00	m c w 20m 80w	4.21
1250.00	w ater 100w	17.53

Gas Rates

	Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)



**TRILOBITE
TESTING, INC.**

DRILL STEM TEST REPORT

TOOL DIAGRAM

Rons Oil Operations Inc

Watson #28-1

1889 200th Ave.
Penokee KS 67659

28-4-30 Decatur KS

Job Ticket: 22594

DST#: 1

ATTN: Richard Bell

Test Start: 2005.11.14 @ 03:05:29


Tool Information

Drill Pipe:	Length: 3974.00 ft	Diameter: 3.80 inches	Volume: 55.74 bbl	Tool Weight: 1500.00 lb
Heavy Wt. Pipe:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight set on Packer: 25000.00 lb
Drill Collar:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight to Pull Loose: 65000.00 lb
			<u>Total Volume: 55.74 bbl</u>	Tool Chased 0.00 ft
Drill Pipe Above KB:	12.00 ft			String Weight: Initial 40000.00 lb
Depth to Top Packer:	3982.00 ft			Final 48000.00 lb
Depth to Bottom Packer:	ft			
Interval between Packers:	42.00 ft			
Tool Length:	62.00 ft			
Number of Packers:	2	Diameter: 6.75 inches		

Tool Comments:

Tool Description	Length (ft)	Serial No.	Position	Depth (ft)	Accum. Lengths
Change Over Sub	1.00			3963.00	
Shut In Tool	5.00			3968.00	
Hydraulic tool	5.00			3973.00	
Packer	5.00			3978.00	20.00 Bottom Of Top Packer
Packer	4.00			3982.00	
Stubb	1.00			3983.00	
Recorder	0.00	6798	Inside	3983.00	
Perforations	3.00			3986.00	
Change Over Sub	1.00			3987.00	
Drill Pipe	31.00			4018.00	
Change Over Sub	1.00			4019.00	
Recorder	0.00	11058	Outside	4019.00	
Bullnose	5.00			4024.00	42.00 Bottom Packers & Anchor

Total Tool Length: 62.00



TRILOBITE
TESTING, INC

DRILL STEM TEST REPORT

FLUID SUMMARY

Rons Oil Operations Inc

Watson #28-1

1889 200th Ave.
Penokee KS 67659

28-4-30 Decatur KS

ATTN: Richard Bell

Job Ticket: 22594

DST#: 1

Test Start: 2005.11.14 @ 03:05:29

Mud and Cushion Information

Mud Type: Gel Chem

Cushion Type:

Oil API:

0 deg API

Mud Weight: 9.00 lb/gal

Cushion Length:

ft

Water Salinity:

60000 ppm

Viscosity: 52.00 sec/qt

Cushion Volume:

bbbl

Water Loss: 11.00 in²

Gas Cushion Type:

Resistivity: 0.00 ohm.m

Gas Cushion Pressure:

psig

Salinity: 1000.00 ppm

Filter Cake: 1.00 inches

Recovery Information

Recovery Table

Length ft	Description	Volume bbl
300.00	m c w 20m 80w	4.208
1250.00	w ater 100w	17.534

Total Length: 1550.00 ft

Total Volume: 21.742 bbl

Num Fluid Samples: 0

Num Gas Bombs: 0

Serial #:

Laboratory Name:

Laboratory Location:

Recovery Comments:

Serial #: 6798


Inside

Rons Oil Operations Inc

28-4-30 Decatur KS

DST Test Number: 1

Pressure vs. Time

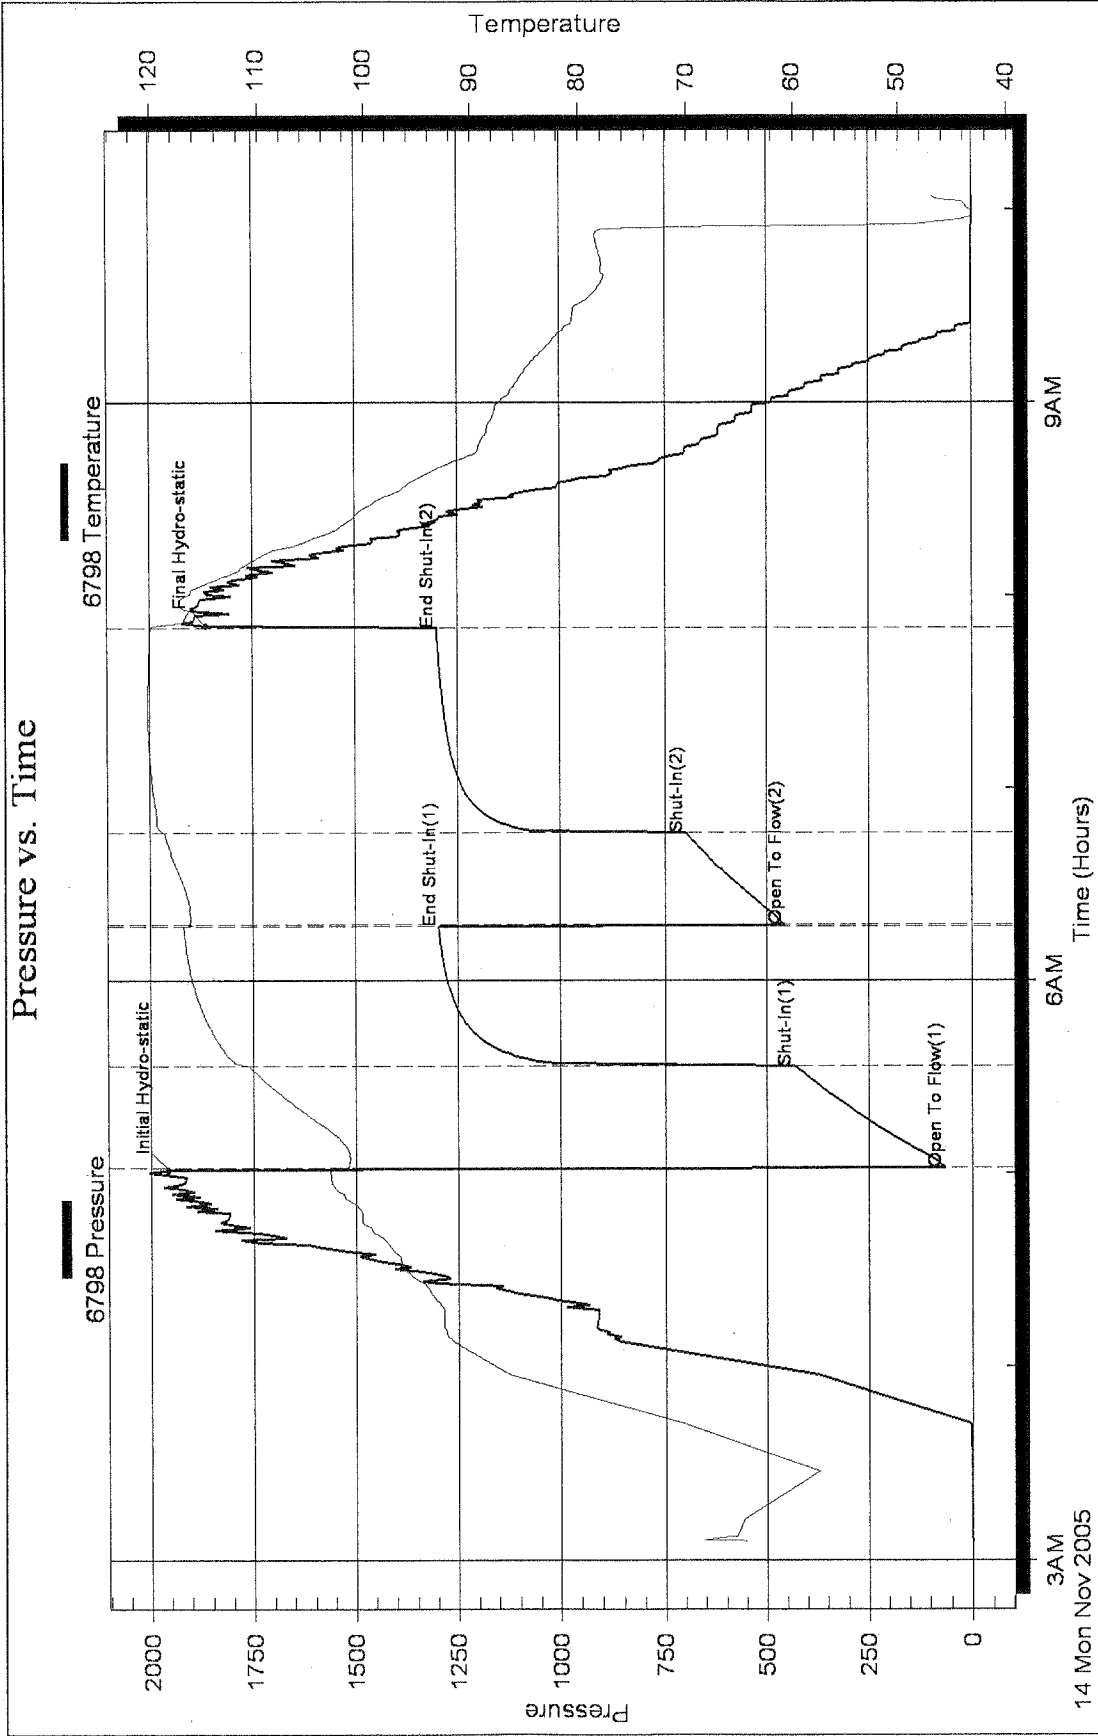


14 Mon Nov 2005 3AM

6AM

9AM

Time (Hours)



**TRILOBITE
TESTING, INC.**

DRILL STEM TEST REPORT

Prepared For: **Rons Oil Operations Inc**

1889 200th Ave.
Penokee KS 67659

ATTN: Richard Bell

28-4-30 Decatur KS

Watson #28-1

Start Date: 2005.11.15 @ 01:50:35

End Date: 2005.11.15 @ 09:25:59

Job Ticket #: 22595 DST #: 2

Trilobite Testing, Inc

PO Box 362 Hays, KS 67601

ph: 785-625-4778 fax: 785-625-5620

Rons Oil Operations Inc


Watson #28-1

28-4-30 Decatur KS

DST # 2

J

2005.11.15



TRILOBITE TESTING, INC.

DRILL STEM TEST REPORT

Rons Oil Operations Inc
 1889 200th Ave.
 Penokee KS 67659
 ATTN: Richard Bell

Watson #28-1

28-4-30 Decatur KS

Job Ticket: 22595

DST#: 2

Test Start: 2005.11.15 @ 01:50:35

GENERAL INFORMATION:

Formation: **J**
 Deviated: **No** Whipstock: **ft (KB)**
 Time Tool Opened: 03:39:00
 Time Test Ended: 09:25:59

Test Type: **Conventional Bottom Hole**
 Tester: **Shane McBride**
 Unit No: **25**

Interval: **4092.00 ft (KB) To 4130.00 ft (KB) (TVD)**
 Total Depth: **4130.00 ft (KB) (TVD)**
 Hole Diameter: **7.88 inches** Hole Condition: **Fair**

Reference Elevations: **2876.00 ft (KB)**
2871.00 ft (CF)
 KB to GR/CF: **5.00 ft**

Serial #: 6798

Inside

Press@RunDepth: **26.88 psig @ 4093.00 ft (KB)**

Capacity: **7000.00 psig**

Start Date: **2005.11.15**

End Date: **2005.11.15**

Last Calib.: **2005.11.15**


Start Time: **01:50:35**

End Time: **09:25:59**

Time On Btm: **2005.11.15 @ 03:38:00**

Time Off Btm: **2005.11.15 @ 07:13:00**

TEST COMMENT: **1/4" in. blow ,died back to a surface blow**
No return
Surface blow
No return

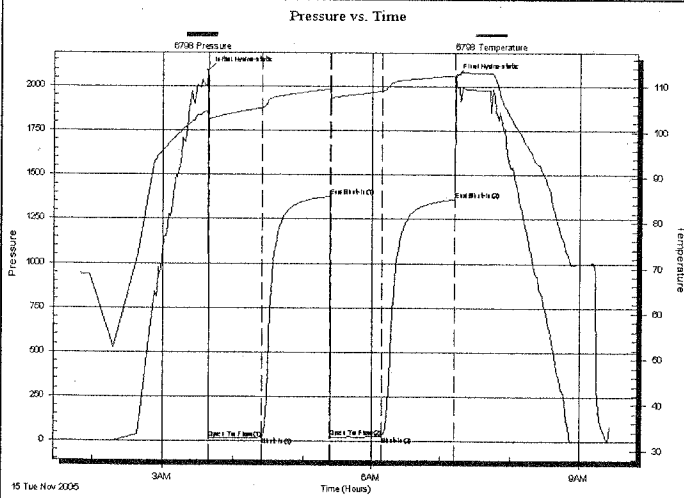

PRESSURE SUMMARY


Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	2088.52	104.69	Initial Hydro-static
1	13.44	102.91	Open To Flow (1)
46	18.92	105.30	Shut-In(1)
105	1377.61	109.52	End Shut-In(1)
106	23.75	107.71	Open To Flow (2)
151	26.88	109.03	Shut-In(2)
215	1361.91	112.50	End Shut-In(2)
215	2052.93	112.66	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)
15.00	w c m40w 60m	0.21

Gas Rates

Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)



**TRILOBITE
TESTING, INC.**

DRILL STEM TEST REPORT

TOOL DIAGRAM

Rons Oil Operations Inc

Watson #28-1

1889 200th Ave.
Penokee KS 67659

28-4-30 Decatur KS

Job Ticket: 22595

DST#: 2

ATTN: Richard Bell


Test Start: 2005.11.15 @ 01:50:35

Tool Information

Drill Pipe:	Length: 4103.00 ft	Diameter: 3.80 inches	Volume: 57.55 bbl	Tool Weight: 1500.00 lb
Heavy Wt. Pipe:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight set on Packer: 25000.00 lb
Drill Collar:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight to Pull Loose: 65000.00 lb
			<u>Total Volume: 57.55 bbl</u>	Tool Chased 0.00 ft
Drill Pipe Above KB:	31.00 ft			String Weight: Initial 42000.00 lb
Depth to Top Packer:	4092.00 ft			Final 42000.00 lb
Depth to Bottom Packer:	ft			
Interval between Packers:	38.00 ft			
Tool Length:	58.00 ft			
Number of Packers:	2	Diameter: 6.75 inches		

Tool Comments:

Tool Description	Length (ft)	Serial No.	Position	Depth (ft)	Accum. Lengths
Change Over Sub	1.00			4073.00	
Shut In Tool	5.00			4078.00	
Hydraulic tool	5.00			4083.00	
Packer	5.00			4088.00	20.00 Bottom Of Top Packer
Packer	4.00			4092.00	
Stubb	1.00			4093.00	
Recorder	0.00	6798	Inside	4093.00	
Perforations	32.00			4125.00	
Recorder	0.00	11058	Outside	4125.00	
Bullnose	5.00			4130.00	38.00 Bottom Packers & Anchor
Total Tool Length:	58.00				



TRILOBITE
TESTING, INC.

DRILL STEM TEST REPORT

FLUID SUMMARY

Rons Oil Operations Inc

Watson #28-1

1889 200th Ave.
Penokee KS 67659

28-4-30 Decatur KS

Job Ticket: 22595

DST#: 2

ATTN: Richard Bell

Test Start: 2005.11.15 @ 01:50:35

Mud and Cushion Information

Mud Type: Gel Chem

Cushion Type:

Oil API:

0 deg API

Mud Weight: 9.00 lb/gal

Cushion Length:

ft

Water Salinity:

47000 ppm

Viscosity: 59.00 sec/qt

Cushion Volume:

bbbl

Water Loss: 9.60 in³

Gas Cushion Type:

Resistivity: 0.00 ohm.m

Gas Cushion Pressure:

psig

Salinity: 1000.00 ppm

Filter Cake: 1.00 inches

Recovery Information

Recovery Table

Length ft	Description	Volume bbbl
15.00	w c m40w 60m	0.210

Total Length: 15.00 ft

Total Volume: 0.210 bbl

Num Fluid Samples: 0

Num Gas Bombs: 0

Serial #:

Laboratory Name:

Laboratory Location:

Recovery Comments:

Serial #: 6798


Inside


Rons Oil Operations Inc

28-4-30 Decatur KS

DST Test Number: 2

Pressure vs. Time

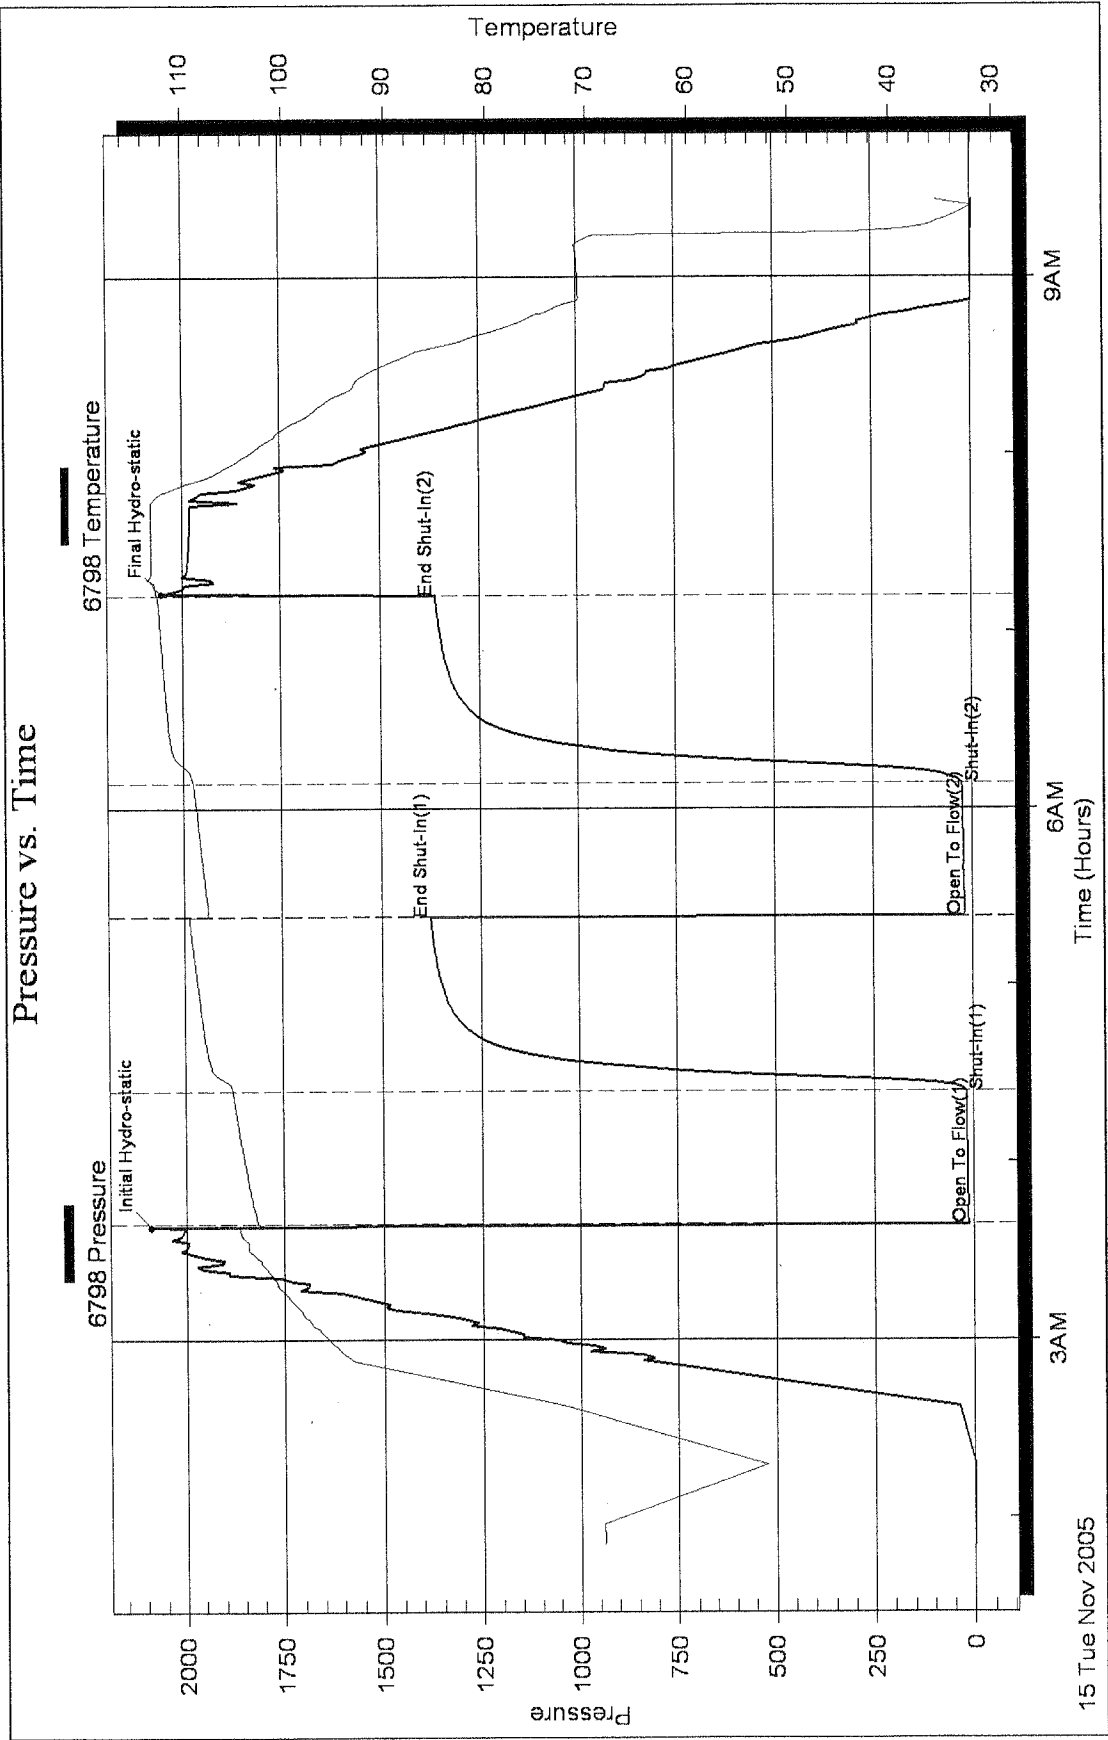

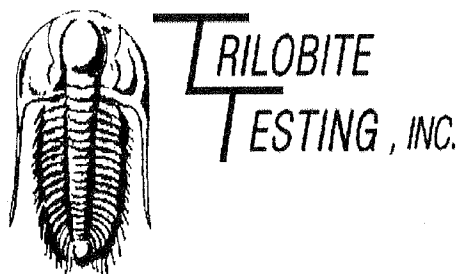

DRILL STEM TEST REPORT

Prepared For: **Rons Oil Operations Inc**

1889 200th Ave.
Penokee KS 67659

ATTN: Richard Bell

28-4-30 Decatur KS

Watson #28-1

Start Date: 2005.11.15 @ 17:35:52

End Date: 2005.11.16 @ 00:50:16

Job Ticket #: 22596 DST #: 3

Trilobite Testing, Inc

PO Box 362 Hays, KS 67601

ph: 785-625-4778 fax: 785-625-5620

Rons Oil Operations Inc


Watson #28-1

28-4-30 Decatur KS

DST # 3

K

2005.11.15



TRILOBITE TESTING, INC.

DRILL STEM TEST REPORT

Rons Oil Operations Inc
 1889 200th Ave.
 Penokee KS 67659
 ATTN: Richard Bell

Watson #28-1

28-4-30 Decatur KS

Job Ticket: 22596

DST#: 3

Test Start: 2005.11.15 @ 17:35:52

GENERAL INFORMATION:

Formation: K
 Deviated: No Whipstock: ft (KB)
 Time Tool Opened: 19:12:17
 Time Test Ended: 00:50:16

Test Type: Conventional Bottom Hole
 Tester: Shane McBride
 Unit No: 25

Interval: 4129.00 ft (KB) To 4158.00 ft (KB) (TVD)
 Total Depth: 4158.00 ft (KB) (TVD)
 Hole Diameter: 7.88 inches Hole Condition: Fair

Reference Elevations: 2876.00 ft (KB)
 2871.00 ft (CF)
 KB to GR/CF: 5.00 ft


Serial #: 6798

Inside

Press@RunDepth: 32.93 psig @ 4130.00 ft (KB)
 Start Date: 2005.11.15 End Date: 2005.11.16
 Start Time: 17:35:52 End Time: 00:41:16

Capacity: 7000.00 psig
 Last Calib.: 2005.11.16
 Time On Btm: 2005.11.15 @ 19:12:02
 Time Off Btm: 2005.11.15 @ 22:42:47

TEST COMMENT: 1/2" in @ open built to 3 1/2" in
 No return
 3/4" in @ open built to 3 1/2" in
 No return

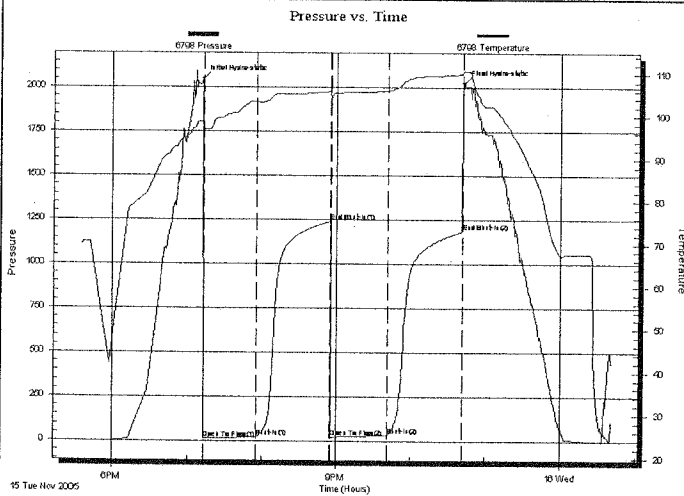

PRESSURE SUMMARY


Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	2047.19	98.97	Initial Hydro-static
1	13.26	97.15	Open To Flow (1)
44	21.33	103.38	Shut-In(1)
103	1241.07	105.84	End Shut-In(1)
104	22.53	103.96	Open To Flow (2)
150	32.93	105.97	Shut-In(2)
210	1183.66	109.90	End Shut-In(2)
211	2024.16	110.66	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)
20.00	free oil 100o	0.28
35.00	h o c m 55o 45m	0.49

Gas Rates

	Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)



**TRILOBITE
TESTING, INC.**

DRILL STEM TEST REPORT

TOOL DIAGRAM

Rons Oil Operations Inc

Watson #28-1

1889 200th Ave.
Penokee KS 67659

28-4-30 Decatur KS

Job Ticket: 22596

DST#:3

ATTN: Richard Bell


Test Start: 2005.11.15 @ 17:35:52

Tool Information

Drill Pipe:	Length: 4129.00 ft	Diameter: 3.80 inches	Volume: 57.92 bbl	Tool Weight:	1500.00 lb
Heavy Wt. Pipe:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight set on Packer:	25000.00 lb
Drill Collar:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight to Pull Loose:	65000.00 lb
			<u>Total Volume: 57.92 bbl</u>	Tool Chased	0.00 ft
Drill Pipe Above KB:	20.00 ft			String Weight: Initial	42000.00 lb
Depth to Top Packer:	4129.00 ft			Final	43000.00 lb
Depth to Bottom Packer:	ft				
Interval between Packers:	29.00 ft				
Tool Length:	49.00 ft				
Number of Packers:	2	Diameter: 6.75 inches			
Tool Comments:					

Tool Description

Tool Description	Length (ft)	Serial No.	Position	Depth (ft)	Accum. Lengths
Change Over Sub	1.00			4110.00	
Shut In Tool	5.00			4115.00	
Hydraulic tool	5.00			4120.00	
Packer	5.00			4125.00	20.00 Bottom Of Top Packer
Packer	4.00			4129.00	
Stubb	1.00			4130.00	
Recorder	0.00	6798	Inside	4130.00	
Perforations	23.00			4153.00	
Recorder	0.00	11058	Outside	4153.00	
Bullnose	5.00			4158.00	29.00 Bottom Packers & Anchor
Total Tool Length:	49.00				



**TRILOBITE
TESTING, INC.**

DRILL STEM TEST REPORT

FLUID SUMMARY

Rons Oil Operations Inc

Watson #28-1

1889 200th Ave.
Penokee KS 67659

28-4-30 Decatur KS

Job Ticket: 22596

DST#: 3

ATTN: Richard Bell

Test Start: 2005.11.15 @ 17:35:52

Mud and Cushion Information

Mud Type: Gel Chem

Cushion Type:

Oil API:

28 deg API

Mud Weight: 10.00 lb/gal

Cushion Length:

ft

Water Salinity:

1000 ppm

Viscosity: 55.00 sec/qt

Cushion Volume:

bbbl

Water Loss: 8.80 in³

Gas Cushion Type:

Resistivity: 0.00 ohm.m

Gas Cushion Pressure:

psig

Salinity: 1000.00 ppm

Filter Cake: 1.00 inches

Recovery Information

Recovery Table

Length ft	Description	Volume bbbl
20.00	free oil 100o	0.281
35.00	h o c m 55o 45m	0.491

Total Length: 55.00 ft

Total Volume: 0.772 bbl

Num Fluid Samples: 0

Num Gas Bombs: 0

Serial #:

Laboratory Name:

Laboratory Location:

Recovery Comments:

Serial #: 6798


Inside


Rons Oil Operations Inc

28-4-30 Decatur KS

DST Test Number: 3

Pressure vs. Time

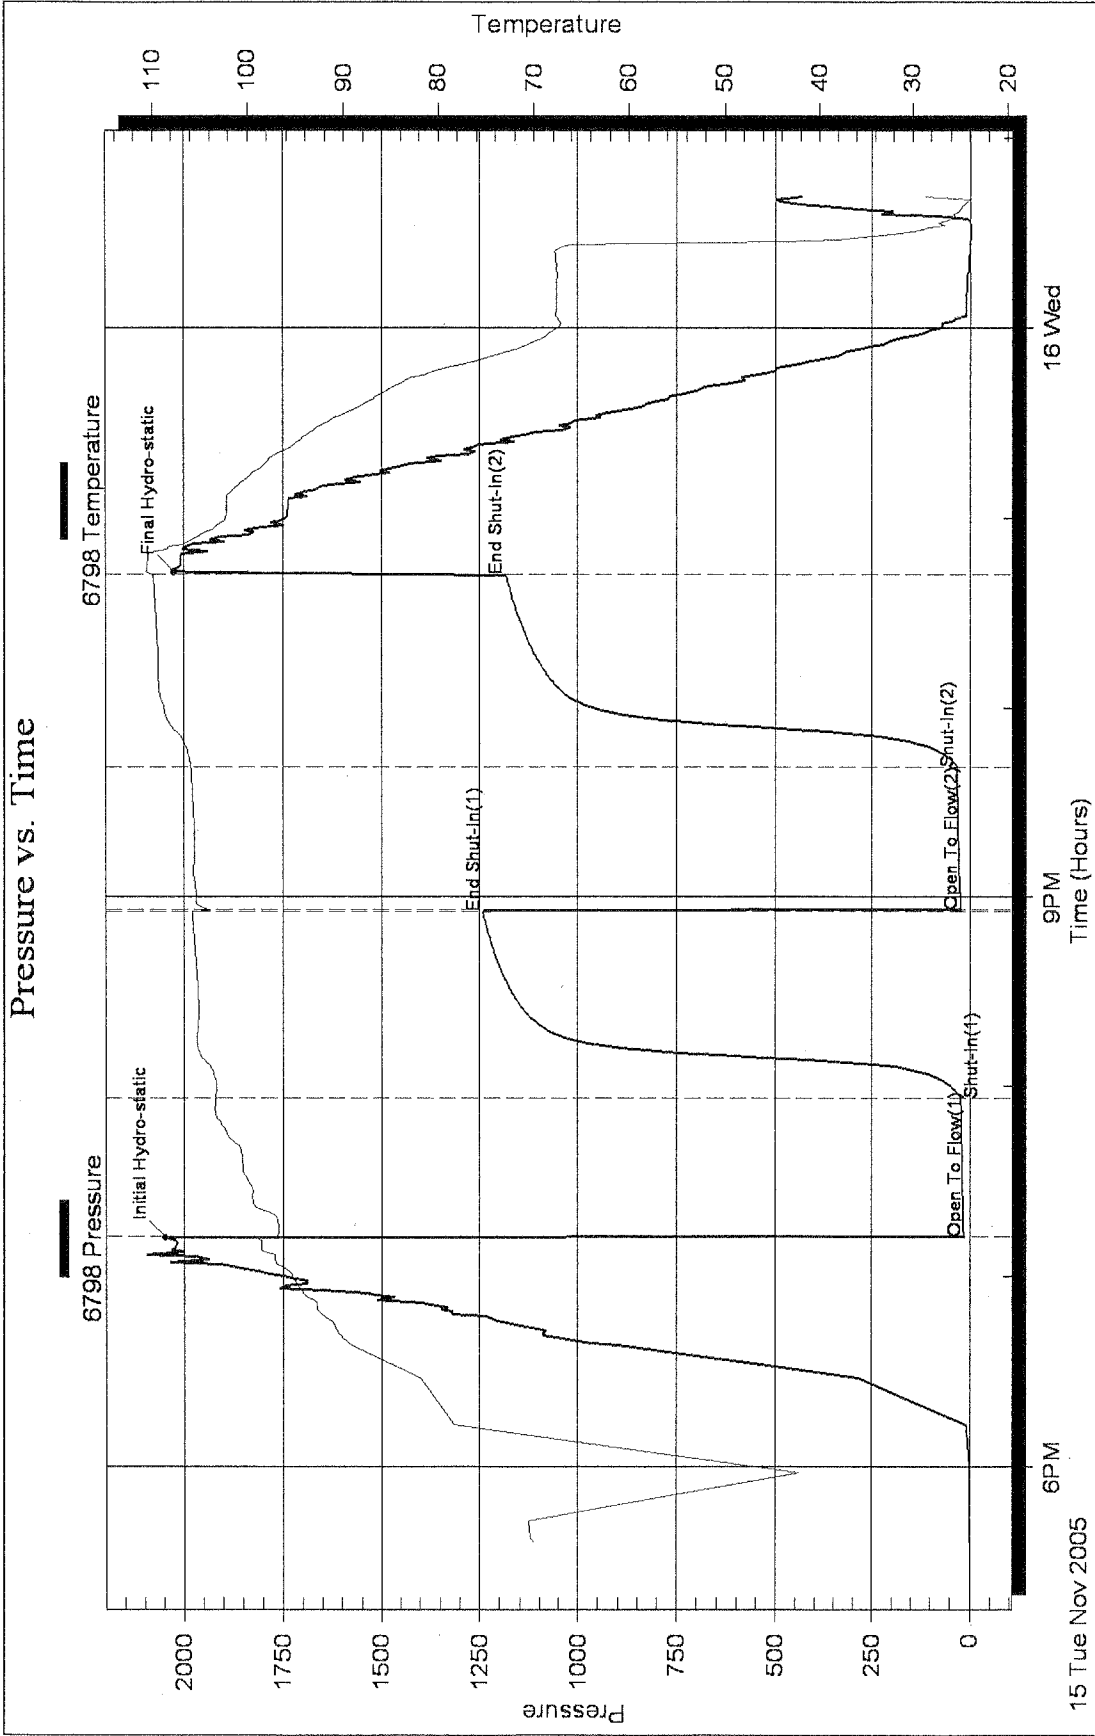



**TRILOBITE
TESTING, INC.**

DRILL STEM TEST REPORT

Prepared For: **Rons Oil Operations Inc**

1889 200th Ave.
Penokee KS 67659

ATTN: Richard Bell

28-4-30 Decatur KS

Watson #28-1

Start Date: 2005.11.16 @ 16:12:21

End Date: 2005.11.16 @ 21:45:15

Job Ticket #: 22597 DST #: 4

Trilobite Testing, Inc

PO Box 362 Hays, KS 67601

ph: 785-625-4778 fax: 785-625-5620

Rons Oil Operations Inc


Watson #28-1

28-4-30 Decatur KS

DST # 4

E-F

2005.11.16



**TRILOBITE
TESTING, INC.**

DRILL STEM TEST REPORT

Rons Oil Operations Inc

Watson #28-1

1889 200th Ave.
Penokee KS 67659

28-4-30 Decatur KS

Job Ticket: 22597

DST#: 4

ATTN: Richard Bell

Test Start: 2005.11.16 @ 16:12:21

GENERAL INFORMATION:

Formation: E-F
 Deviated: No Whipstock: ft (KB)
 Time Tool Opened: 18:16:16
 Time Test Ended: 21:45:15

Test Type: Conventional Bottom Hole
 Tester: Shane McBride
 Unit No: 25

Interval: **4019.00 ft (KB) To 4048.00 ft (KB) (TVD)**
 Total Depth: 4218.00 ft (KB) (TVD)
 Hole Diameter: 7.88 inches Hole Condition: Fair

Reference Elevations: 2876.00 ft (KB)
 2871.00 ft (CF)
 KB to GR/CF: 5.00 ft


Serial #: 6798

Inside

Press@RunDepth: 15.34 psig @ 4020.00 ft (KB)
 Start Date: 2005.11.16 End Date: 2005.11.16
 Start Time: 16:12:21 End Time: 21:38:15

Capacity: 7000.00 psig
 Last Calib.: 2005.11.16
 Time On Btm: 2005.11.16 @ 18:15:16
 Time Off Btm: 2005.11.16 @ 19:47:01

TEST COMMENT: Weak blow died in 23 min.
 No return

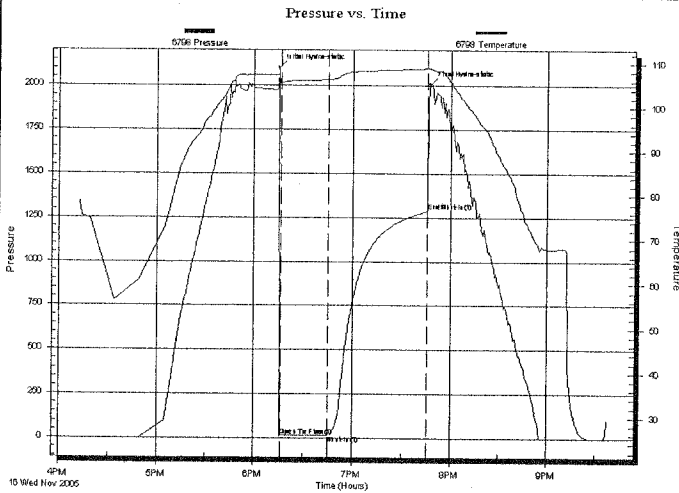

PRESSURE SUMMARY


Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	2101.04	107.55	Initial Hydro-static
1	13.13	105.62	Open To Flow (1)
30	15.34	106.26	Shut-In(1)
91	1286.09	108.85	End Shut-In(1)
92	2008.23	108.83	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)
3.00	mud 100%m	0.04

Gas Rates

	Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)



**TRILOBITE
TESTING, INC.**

DRILL STEM TEST REPORT

TOOL DIAGRAM

Rons Oil Operations Inc

Watson #28-1

1889 200th Ave.
Penokee KS 67659

28-4-30 Decatur KS

Job Ticket: 22597

DST#: 4

ATTN: Richard Bell


Test Start: 2005.11.16 @ 16:12:21

Tool Information

Drill Pipe:	Length: 4005.00 ft	Diameter: 3.80 inches	Volume: 56.18 bbl	Tool Weight: 1500.00 lb
Heavy Wt. Pipe:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight set on Packer: 25000.00 lb
Drill Collar:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight to Pull Loose: 65000.00 lb
			<u>Total Volume: 56.18 bbl</u>	Tool Chased 0.00 ft
Drill Pipe Above KB:	5.00 ft			String Weight: Initial 43000.00 lb
Depth to Top Packer:	4019.00 ft			Final 43000.00 lb
Depth to Bottom Packer:	ft			
Interval between Packers:	200.00 ft			
Tool Length:	219.00 ft			
Number of Packers:	2	Diameter: 6.75 inches		

Tool Comments:

Tool Description	Length (ft)	Serial No.	Position	Depth (ft)	Accum. Lengths
Shut In Tool	5.00			4005.00	
Hydraulic tool	5.00			4010.00	
Packer	5.00			4015.00	19.00 Bottom Of Top Packer
Packer	4.00			4019.00	
Stubb	1.00			4020.00	
Recorder	0.00	6798	Inside	4020.00	
Perforations	24.00			4044.00	
Recorder	0.00	11058		4044.00	
Blank Off Sub	1.00			4045.00	200.00 Tool Interval
Packer	4.00			4049.00	
Stubb	1.00			4050.00	
Anchor	7.00			4057.00	
Change Over Sub	1.00			4058.00	
Drill Pipe	155.00			4213.00	
Change Over Sub	1.00			4214.00	
Recorder	0.00	11057		4214.00	
Bullnose	5.00			4219.00	1000218.00 Bottom Packers & Anchor
Total Tool Length:	219.00				



TRILOBITE
TESTING, INC.

DRILL STEM TEST REPORT

FLUID SUMMARY

Rons Oil Operations Inc

Watson #28-1

1889 200th Ave.
Penokee KS 67659

28-4-30 Decatur KS

Job Ticket: 22597

DST#: 4

ATTN: Richard Bell

Test Start: 2005.11.16 @ 16:12:21

Mud and Cushion Information

Mud Type: Gel Chem

Cushion Type:

Oil API:

0 deg API

Mud Weight: 10.00 lb/gal

Cushion Length:

ft

Water Salinity:

1000 ppm

Viscosity: 55.00 sec/qt

Cushion Volume:

bbl

Water Loss: 8.80 in³

Gas Cushion Type:

Resistivity: 0.00 ohm.m

Gas Cushion Pressure:

psig

Salinity: 1000.00 ppm

Filter Cake: 1.00 inches

Recovery Information

Recovery Table

Length ft	Description	Volume bbl
3.00	mud 100%m	0.042

Total Length: 3.00 ft Total Volume: 0.042 bbl

Num Fluid Samples: 0

Num Gas Bombs: 0

Serial #:

Laboratory Name:

Laboratory Location:

Recovery Comments:


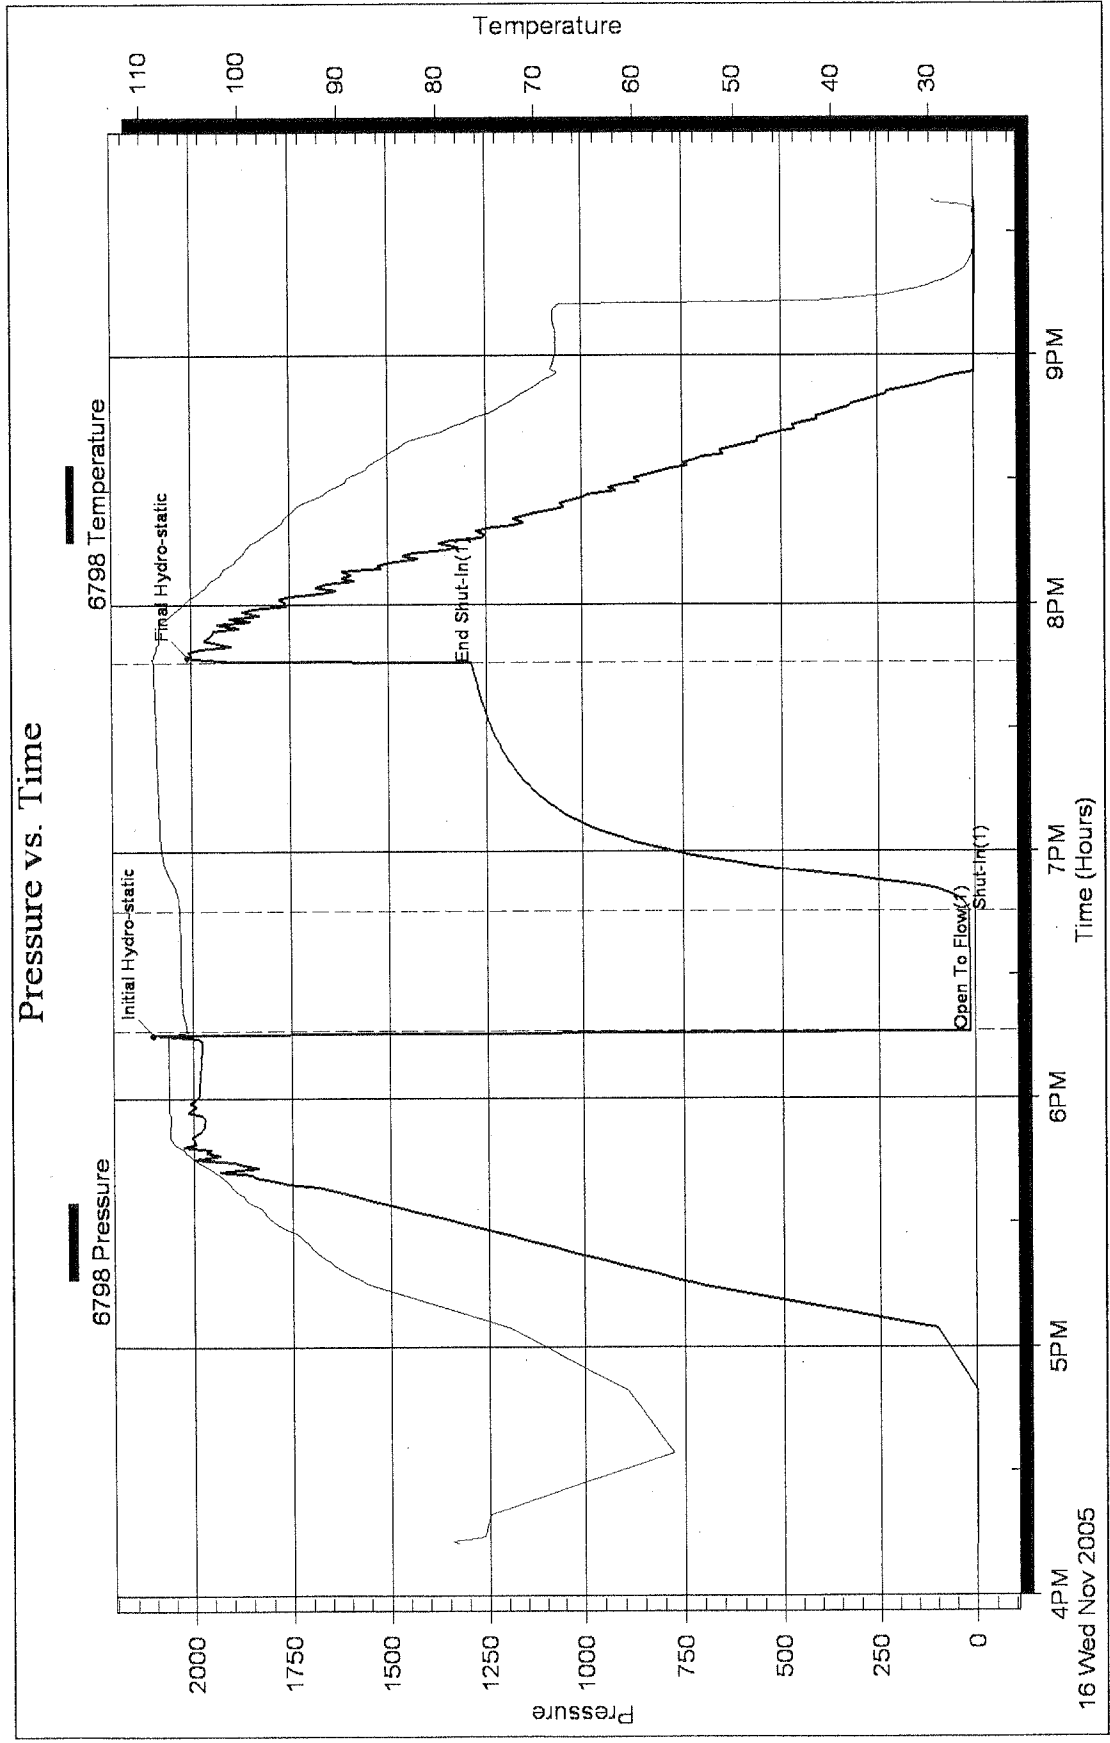


CHART PAGE

This is a photocopy of the actual AK-1 recorder chart.

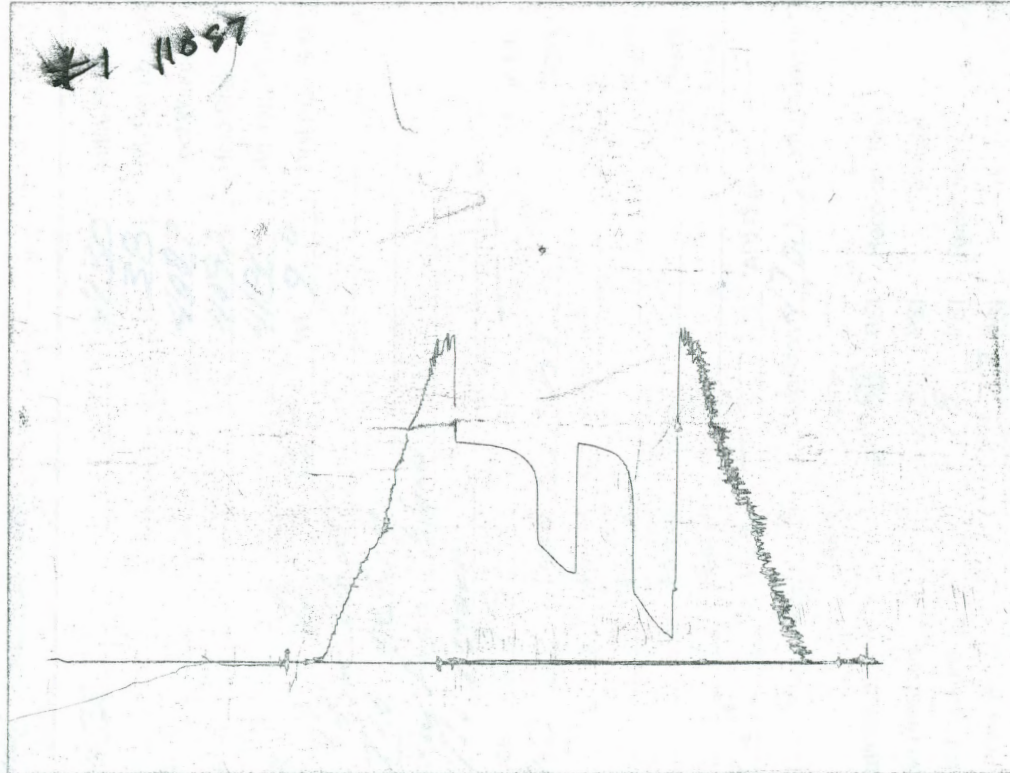

Test Ticket

Sub Total \$1100.00
Total \$1100.00

10/1/50 10:30 AM
10/1/50 10:35 AM
10/1/50 10:40 AM
10/1/50 10:45 AM
10/1/50 10:50 AM
10/1/50 10:55 AM
10/1/50 11:00 AM

CHART PAGE

This is a photocopy of the actual AK-1 recorder chart.

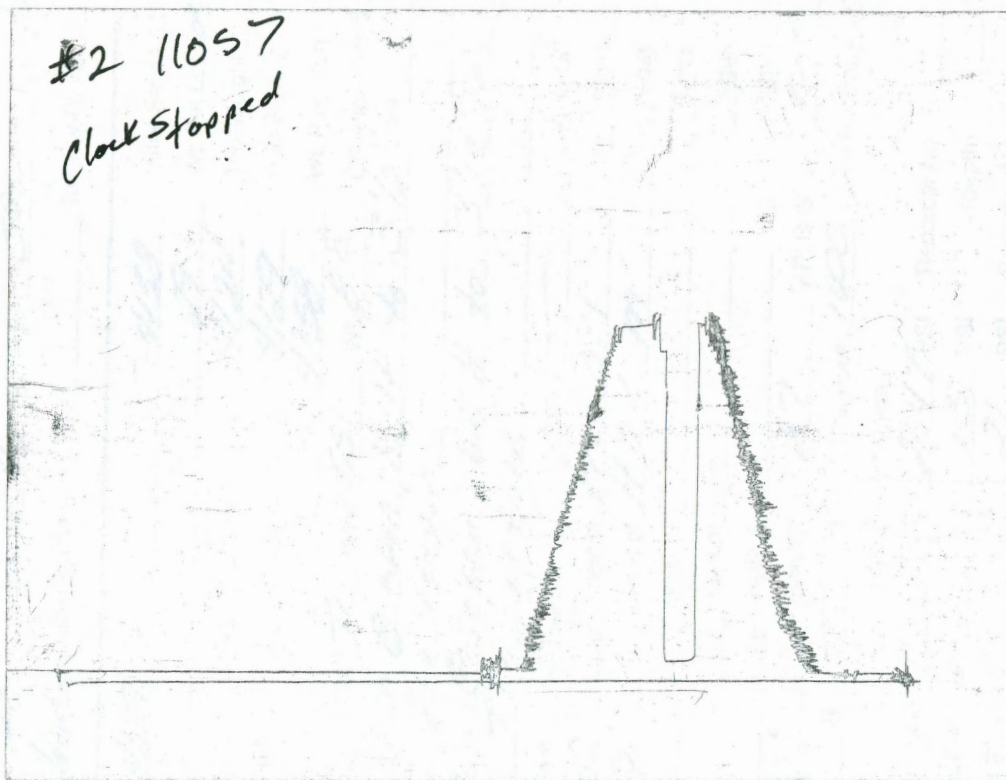


CHART PAGE

This is a photocopy of the actual AK-1 recorder chart.

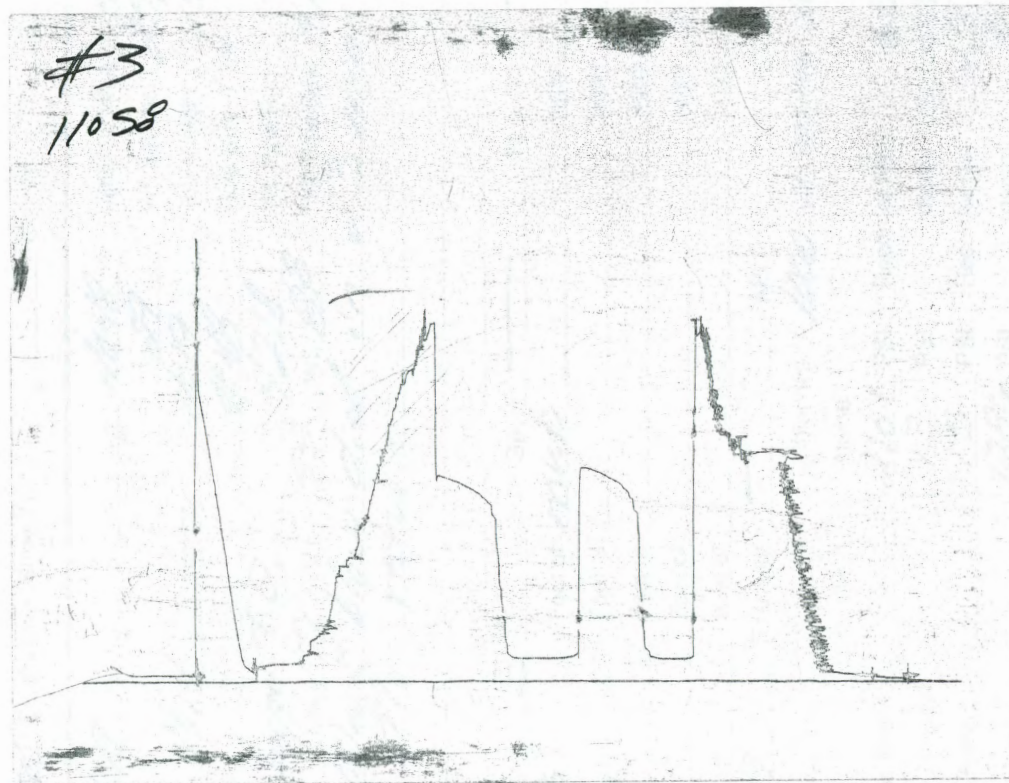


CHART PAGE

This is a photocopy of the actual AK-1 recorder chart.

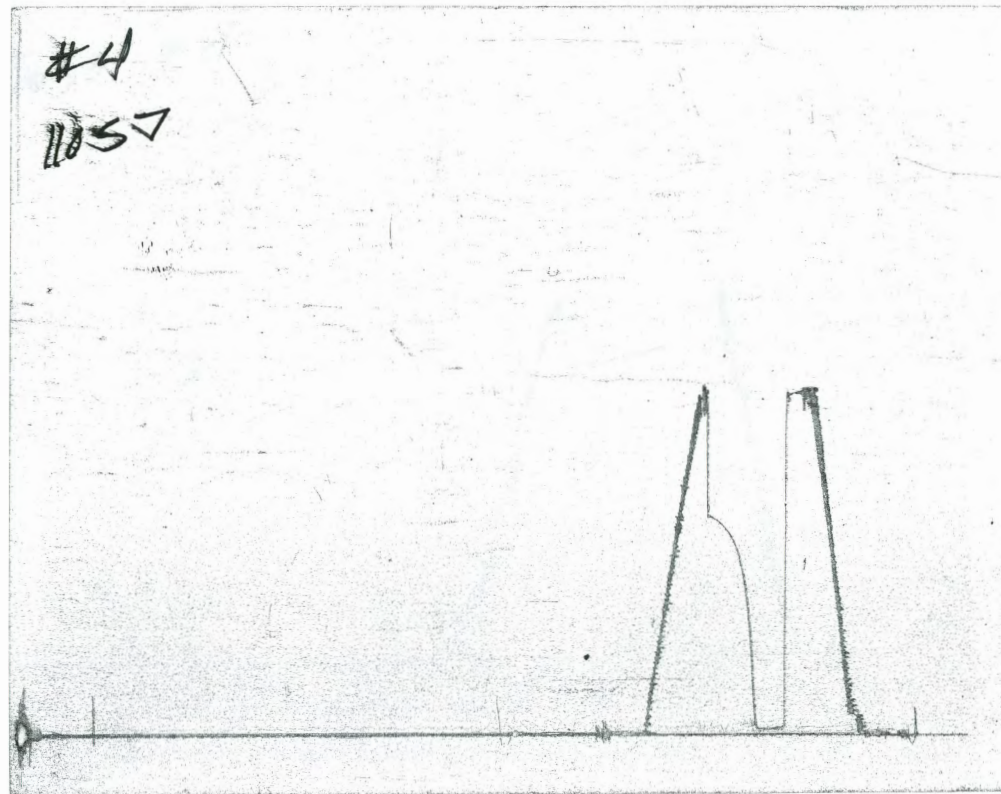


CHART PAGE

This is a photocopy of the actual AK-1 recorder chart.

