

3/24/1967

6-15-23E

# Fred Spindle Drilling Contractor

Oil and Gas Well Repair

Johnson County  
Sec. 6 - T. 15S. - R. 23E.  
SW SW W/2 (?)

log of Morvin Turner gas well S.E of house


1034 E. PEDRIA  
PADLA, KANSAS  
PH. AXTEL 4-3552

18	soil & clay	18
12	lime	30
7	shale	37
18	lime	55
11	shale	66
22	lime	88
4	shale	92
10	lime	102
54	shale	156
6	lime	162
14	shale	176
20	lime	196
14	shale	210
6	red bed	216
5	lime	221
5	shale	226
7	lime	233
38	s hale	271
2	lime	273
10	shale	283
8	lime	290
3	lime sandy gas	294
17	lime	311
4	shale	315
24	lime	339
3	slate	342
3	lime	345
4	shale	349
10	lime	359
2	shale	361 S. L. M.
11	shale sandy	372
4	sand gas	376 gas
9	shale sandy	385 T. D.

wyandotte

8 # plate Packer set at 371  
14 Ft. of anchor & Per.  
below plate packer  
5 sacks of cement on packer

well completed 3--31--1967

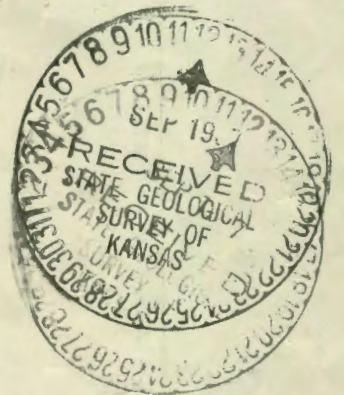

Pay Zone 371-376'

well record was received Sept 1967  
from a grad. student, employed at CRES (KU)

