

15-147-00608-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

OR  
FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging off formations.

NORTH

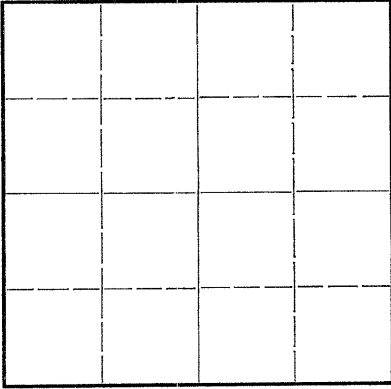

Locate well correctly on above  
Section Plat

Phillips County. Sec. 31 Twp. 4 Rge. 18 (W)  
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. NE 1/4 NE 1/4 NW 1/4  
Lease Owner The Texas Company  
Lease Name W. C. Jackson Well No. 1  
Office Address 614 Bitting Building, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed June 21, 1944 19.  
Application for plugging filed June 21, 1944 19.  
Application for plugging approved June 22, 1944 19.  
Plugging commenced June 24, 1944 19.  
Plugging completed June 24, 1944 19.  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19.  
Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon R. Petty  
Producing formation Depth to top Bottom Total Depth of Well 3483 Feet  
Show depth and thickness of all water, oil and gas formations.



OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Anhydrite	Dry	1435'	3096'	8 5/8" OD	1450'	0
Lansing	"	3096'	3452'	32" LW		
Arbuckle	"	3452'	3483'			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with mud to 1450'  
15 sacks cement to 1420'  
Heavy mud to 30'  
Cement to top of surface.

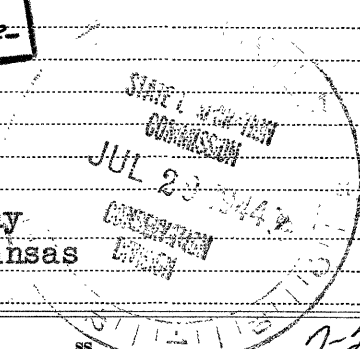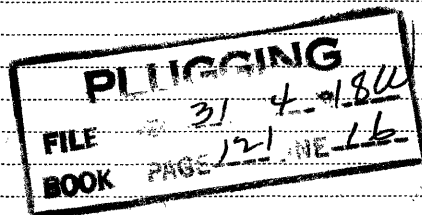

(If additional description is necessary, use BACK of this sheet)  
Correspondence regarding this well should be addressed to The Texas Company  
Address 614 Bitting Bldg., Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss. 7-29-44  
(employee of owner) or (owner/proprietor) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me-God.

(Signature) Marshall Lups  
614 Bitting Building, Wichita, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 28th day of July, 1944

My commission expires August 26, 1945  
Bertha W. Butts Notary Public.

15-147-00008-00-00

# LOG OF WELL

Form PO-214 Sheet 1 (2-42) 10M

W. C. JACKSON

SHEET 1

OWNER The Texas Company DIVISION Okla-Kansas DATE MADE July 24, 1944  
 DISTRICT Kansas LEASE W. C. Jackson WELL NO. 1  
 STATE Kansas COUNTY OR PARISH Phillips TWP. 4 S RANGE 18 W SEC. 31  
 LOCATION OF WELL C NE 1/4 NE 1/4 NW 1/4

COMMENCED RIGGING UP June 4, 1944 COMMENCED DRILLING June 6, 1944 COMPLETED DRILLING June 21, 1944  
 DAY DRILLER \_\_\_\_\_ NIGHT DRILLER \_\_\_\_\_ CONTRACTOR Parker Drilling Co.  
 CABLE FROM \_\_\_\_\_ TO \_\_\_\_\_ ROTARY FROM Top TO 3483' COMPANY RIG No. \_\_\_\_\_  
 TOTAL DEPTH 3483' MEASURED BY M. C. Harrell ELEVATION 1856'

## CASING RECORD

SIZE	WEIGHT	PUT IN WELL		PULLED OUT		LOST IN WELL		SHOES		PACKERS			
		FEET	INS.	FEET	INS.	FEET	INS.	LENGTH	MAKE	KIND	LENGTH	SET AT	
8 5/8"OD	32# IW	1450'		0		1450'							FT.
													FT.
													FT.
													FT.
													FT.
													FT.
													FT.
													FT.
													FT.

WAS CASING CEMENTED? Yes IF SO, HOW MANY SACKS OF CEMENT USED? 450 sacks  
 LINER: STATE SIZE AND WEIGHT \_\_\_\_\_ WHERE SET \_\_\_\_\_ FT. AND INS. BLANK \_\_\_\_\_ FT. AND INS. PERFORATED \_\_\_\_\_  
 HOW PUT TOGETHER \_\_\_\_\_ COUPLING \_\_\_\_\_ FLUSH-JOINT \_\_\_\_\_ INSERTED \_\_\_\_\_  
 REMARKS: \_\_\_\_\_

## EQUIPMENT RECORD

TUBING				SUCKER RODS			PUMPING OUTFIT
SIZE	WEIGHT	FEET	INS.	FEET	INS.	SIZE AND KIND	DESCRIPTION, KIND, SIZE, ETC.

FLOWING, PUMPING, GASSER OR DRY Dry PRODUCTION FIRST 24 HOURS 0 PRODUCTION SETTLED 0  
 IF GAS WELL, OPEN FLOW CAPACITY \_\_\_\_\_ SHUT IN PRESSURE \_\_\_\_\_ ROCK PRESSURE \_\_\_\_\_  
 KIND OF SHOT \_\_\_\_\_ SIZE OF SHOT, QUARTS \_\_\_\_\_  
 NUMBER OF SHELLS \_\_\_\_\_ SIZE OF SHELLS \_\_\_\_\_ INCHES, DIAMETER \_\_\_\_\_  
 LENGTH OF SHELLS \_\_\_\_\_ FEET \_\_\_\_\_ INCHES \_\_\_\_\_ TOP OF SHOT \_\_\_\_\_  
 BOTTOM OF SHOT \_\_\_\_\_ ANCHOR \_\_\_\_\_ WELL BRIDGED TO \_\_\_\_\_  
 TOTAL DEPTH OF WELL \_\_\_\_\_ NUMBER OF SHOT \_\_\_\_\_ PRODUCTION BEFORE SHOT \_\_\_\_\_ BBLs. PER DAY \_\_\_\_\_  
 PRODUCTION AFTER SHOT \_\_\_\_\_ BBLs. PER DAY. SHOT FURNISHED BY \_\_\_\_\_  
 NAME OF SHOOTER \_\_\_\_\_ SHOT INSPECTED \_\_\_\_\_ BY \_\_\_\_\_ (COMPANY EMPLOYEE) \_\_\_\_\_  
 COMMENCED DRILLING DEEPER \_\_\_\_\_ COMPLETED \_\_\_\_\_ DRILLING DEEPER \_\_\_\_\_

**PLUGGING**  
 FILE # 31 4-18W  
 BOOK PAGE 12 LINE 16

7-29-44

TOTAL DEPTH 3483' PRODUCTION FIRST 24 HOURS 0 PRODUCTION SETTLED 0  
 REMARKS: Ran Schlumberger survey at 3483'. No show of oil or gas. Well plugged by State Corporation Commission Agent Eldon R. Petty.

NOTE: IF WELL WAS DRY, STATE UNDER REMARKS, WHEN, HOW, AND BY WHOM PLUGGED. STATE UNDER REMARKS ANYTHING OF INTEREST NOT COVERED IN LOG. IF THE SPACE PROVIDED FOR REMARKS IS NOT SUFFICIENT WRITE ON BOTTOM OF LAST SHEET OF LOG.

15-147-00008-00-00

LOG OF WELL

SHEET No. 2

District KANSAS

Owner THE TEXAS COMPANY Farm W. O. JACKSON

Well No. 1

FORMATION	AMOUNT	COLOR	HARD OR SOFT	DEPTH CORES TAKEN	REMARKS
Cellar	10				<u>Elevation - 1856'</u> <u>Formation Tops -</u> Anhydrite - 1435' Lansing - 3096' Arbuckle - 3452' <u>Casing Record -</u> 1450' of 8 5/8" OD 32# LW casing cemented w/450 sacks of cement. Cored from 3468' to 3483' - no show of oil. Ran Schlumberger Survey @ 3483'. Plugged and abandoned.
Clay and Sand	60				
Shale & Shells	500	440			
Shale & Sand	650	150			
Sand	730	80			
Shale & Shells	760	30			
Sand	775	15			
Sand & Shells	1147	372			
Sand w/shale strks.	1395	248			
Shale & Shells	1435	40			
Anhydrite	1480	45			
Red Rock	1500	20			
Shale & Shells	1910	410			
Shale	1988	78			
Shale & Shells	2524	536			
Lime	2665	141			
Shale & Shells	2760	95			
Lime	2830	70			
Lime & Shale	2930	100			
Lime	3254	324			
Lime w/shale strks.	3285	31			
Lime	3360	75			
Shale	3391	31			
Shale w/lime strks.	3468	77			
Lime	3483	15			
Total Depth	3483				

PLUGGING  
 FILE 31 4 R 1810  
 BOOK PAGE 12 LINE 16