

FOR KCC USE:

FORM CB-1 12/93

FORM MUST BE TYPED

FORM MUST BE SIGNED

ALL BLANKS MUST BE FILLED IN

EFFECTIVE DATE: 10-19-04DISTRICT # 2SGA? Yes NoState of Kansas
CATHODIC PROTECTION BOREHOLE INTENT

Must be approved by the K.C.C. sixty (60) days prior to commencing well.

Expected Spud (Starting) Date 08 23 04 AE E12 Spot (Location) Q/Q/Q NE SE NE 27 19 S Rg 6 X West
month day year feet from South / North line of Section
feet from East / West line of SectionOPERATOR: License # 33471 9/30/05
(Circle directions from nearest outside corner boundaries)Name: Mid-Continent Fractionation and Storage LLCAddress: P.O. Box 3102 PerCity/State/Zip: Tulsa, Oklahoma 74172 Max MollContact Person: Max MollPhone: (918) 627-3188CONTRACTOR: License #: 6427 12/30/04Name: Rosencrantz-Bemis Ent. d/b/a Darling Drilling Co.Type Drilling Equipment: X Mud Rotary Other
Air Rotary

CONSTRUCTION FEATURES

Length of Cathodic Surface (Non-Metallic) Casing
Planned to be set: see note 80 ft.Length of Conductor pipe (if any?): none ft.Size of the borehole (I.D.): 9" and 16" inchesCathodic surface casing size: 10" inchesCathodic surface casing centralizers set at depths of: 55;
25 ; ... ; ... ; ... ; ... ; ... ; ... ; ... ; ... ; ... ;Cathodic surface casing will terminate at:
... Above surface ... Surface Vault X Below Surface VaultPitless casing adaptor will be used: Yes/No at Depth .3 ft.Anode installation depths are: 90 ; 100 ; 110 ; 120 ;
130 ; 140 ; 150 ; 160 ; 170 ; 180 ; 190 ; ... ; ... ;* Set no less than 80' of surface casing→ surface casing must be set a min. of
20' into bedrock

AFFIDAVIT

The undersigned hereby affirms that the drilling, completion and eventual plugging of this well will comply with K.S.A. 55-101, et. seq. It is agreed that the following minimum requirements will be met:

1. Notify the appropriate district office prior to spudding of and again before plugging well;
2. A copy of the approved notice of intent to drill shall be posted on each drilling rig;
3. The minimum amount of cathodic surface casing as specified below shall be set by grouting to the top.
4. An agreement between the operator and the district office on plugs and placement is necessary prior to plugging;
5. The appropriate district office will be notified before well is either plugged or casing is grouted in;
6. IN ALL CASES, NOTIFY DISTRICT OFFICE PRIOR TO ANY CEMENTING.

I hereby certify that the statements made herein are true and to the best of my knowledge and belief.

Date: 8-17-04 Signature of Operator or Agent: Angel Dodson Title: mgr.* Note: NAME of
Company & Lic.
Per Max Moll
10-14-2004
RSP/KCC

FOR KCC USE:	
API # 15-	<u>159-22436-0000</u> A14-3
Conductor pipe required	<u>NONE</u> feet
Minimum cathodic surface casing required	<u>80</u> feet
Approved by:	<u>RSP 10-14-04</u>
This authorization expires: <u>4-14-05</u>	
(This authorization void if drilling not started within 6 months of effective date.)	
Spud date:	Agent:

REMEMBER TO:

- File Drill Pit Application (form CDP-1) with Intent to Install;
- File Completion Form CB-2 within 30 days of spud date;
- Notify appropriate district office 48 hours prior to workover or re-entry;
- Submit plugging report (CB-4) within 30 days after plugging is completed.

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202-1286.

Lease Name: Mitchell Conway Well #: MP 8.8
Water Line
Facility Name: "
Ground Surface Elevation: 1594 to 1600 MSL
Cathodic Borehole Total Depth 200 ft.
Depth to Bedrock 40 ft.

WATER INFORMATION:

Aquifer Penetration: None X Single Multiple
Depth to bottom of fresh water: 60 to Redrock
Depth to bottom of usable water: 200
Water well within one-quarter mile: yes X no
Public water supply well within one mile: yes X no
Water Source for Drilling Operations:X well farm pond stream otherWater Well Location: Hutchinson, KansasWell @ shop: n/aDWR Permit #: n/aStandard Dimension Ratio (SDR) is = 365

(cathodic surface OD csg. in inches / MWT in inches = SDR)

Annular space between borehole and casing will be grouted
with: X Concrete Bentonite Cement
Neat cement Bentonite clayAnode vent pipe will be set at: 120 ft. above surfaceAnode conductor (backfill) material TYPE: SE.3Depth to BASE of Backfill installation material: 200
Depth to TOP of Backfill installation material: 70Max td = 200'

RECEIVED

AUG 18 2004

KCC WICHITA

27
19
16
3

IN ALL CASES PLOT THE INTENDED WELL ON THE PLAT BELOW

Show the relationship to other wells or facilities proposed to be serviced by the intended cathodic borehole. Please show all the wells, existing cathodic boreholes, pipelines or facilities within 1/2 mile of the proposed borehole.

API NO. 15 Mid-Continent Fractionation

OPERATOR and Storage LLC

LEASE Mitchell Conway Water Lines

WELL NUMBER MP 8.8

FACILITY NAME _____

TOEAG LLC

LOCATION OF WELL: COUNTY Rice

1585 feet from south/north line of section

50 feet from east/west line of section

SECTION 27 TWP 19 RG 6W

SPOT: QTR/QTR/QTR/QTR OF ACREAGE

 - NE - SE - NE

IS SECTION X REGULAR or IRREGULAR


IF SECTION IS IRREGULAR, LOCATE WELL FROM NEAREST CORNER BOUNDARY.

Section corner used: X NE NW SE SW


PLAT

(Show location of intended cathodic borehole.)

(Show footage from nearest lease, unit or outside section boundary line.)

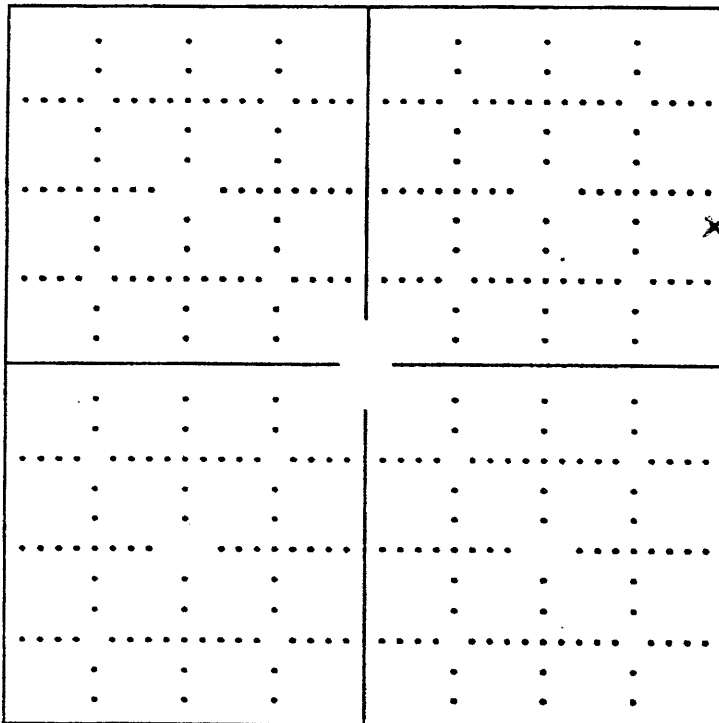

RECEIVED
AUG 18 2004
KCC WICHITA

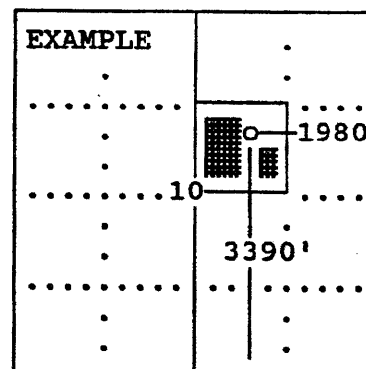

SEWARD CO.

In plotting the proposed location of the well, you must show:

- 1) The manner in which you are using the depicted plat by identifying section lines, i.e. 1 section, 1 section with 8 surrounding sections, 4 sections, etc.;
- 2) the distance of the proposed drilling location from the section's south/north and east/west; and
- 3) the distance to the nearest lease, unit or outside section boundary line.