

15-179-00011-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging of formations.

NORTH

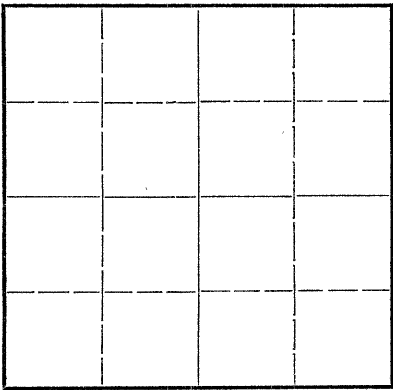

Locate well correctly on above
Section Plat

Sheridan County. Sec. 1 Twp. 6 Rge. (E) 27 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines NE 1/2 NE 1/2 SE 1/2
Lease Owner Barnett Oil Company, Peel-Hardman Producers, et al
Lease Name Stuart Well No. 1
Office Address 417 First Nat'l Bank Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed February 3 1949
Application for plugging filed February 6 1949
Application for plugging approved February 6 1949
Plugging commenced February 7 1949
Plugging completed February 17 1949
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production - 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well C. D. Stough
Producing formation - Depth to top - Bottom - Total Depth of Well 4140 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Surface Pipe				8 5/8	299'	None
Oil String				5 1/2	3851'	1800 feet.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Lane wells plug set at 3830 feet. Filled with chat from 3830 feet to 3640 feet. Dumped 5 sacks of cement with dump bailer at 3640 feet. Shot off casing and pulled 1800 feet of 5 1/2" casing. Filled hole with heavy mud to 299 feet. Dumped 15 sacks of cement with dump bailer at 299 feet. Filled hole with heavy mud to 25 feet. Filled with cement from 25 feet to bottom of cellar.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Barnett Oil Company
Address 417 First Nat'l. Bank Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
W. R. Hunter (employee of owner or contractor) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. R. Hunter
First Nat'l Bank Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 16th day of March 1949
Adelaide Oliver
Notary Public.

My commission expires May 12, 1951

PLUGGING
FILE REC 1/6 270
84
BOOK FILE

MAR 24 1949

STATE CORPORATION
2-24-49

15-179 70011-00-00

BARNETT OIL COMPANY, ET AL

LOG OF STUART WELL NO. 1

NE¹/₄ NE¹/₄ SE¹/₄ SECTION 1-6S-27W, SHERIDAN COUNTY, KANSAS.

<u>Formation</u>	<u>From</u>	<u>To</u>	<u>Remarks</u>
Surface Clay and Sand	0	40	
Sand	40	65	
Shale and Shells	65	1110	Set 8 5/8" Surface Pipe at 299 feet
Sand and Shale	1110	1375	
Shale and Shell Breaks	1375	1720	
Shale and Shells	1720	2255	
Shale and Shell Breaks	2255	2515	
Shale and Shells	2515	2645	
Shale and Lime	2645	2790	
Lime and Shale	2790	2970	
Shale and Lime	2970	3060	
Lime and Shale	3060	3150	
Shale and Lime Breaks	3150	3285	
Shale and Lime	3285	3500	
Shale	3500	3515	
Lime	3515	3835	
Lime and Shale	3835	3880	
Lime	3880	3990	
Lime and Chert	3990	4060	
Cherty Lime	4060	4100	
Lime	4100	4140	
Total Depth		4140	Set 5 1/2" Casing at 3851 feet, cemented with 125 sacks of cement.

TESTING -

Perforated casing with 26 shots from 3760 1/2' to 3770'; 1 bbl. water per hour. Perforated with 26 shots from 3750 1/2' to 3760'; no increase in water, no oil. Set Lane Wells plug at 3830 feet. Perforated with 24 shots from 3793' to 3785'. No increase in water, no oil. Perforated with 26 shots from 3730 1/2' to 3740'; no increase. Perforated with 26 shots from 3740 1/2' to 3750'; small increase in water. Perforated with 21 shots from 3642' to 3649'; 250 ft. water in hole. Dry and abandoned.

PLUGGING
 FILE SEC 1 T 6 R 27 W
 BOX NO 84 4

3-24-49
 OPERATOR