


15-065-00729-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

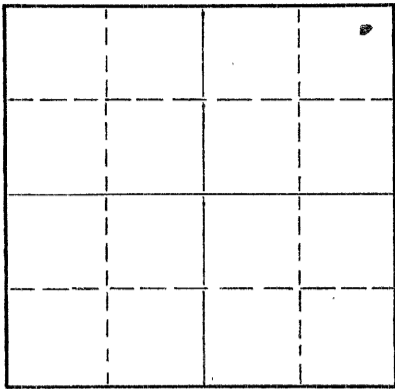

Locate well correctly on above  
Section Plat

Graham County. Sec. 26 Twp. 7 Rge. X (E) 24 (W)  
Location as "NE/CNW/SW" or footage from lines NE NE NE  
Lease Owner E. K. Carey Drilling Co., Inc.  
Lease Name Super Well No. 1  
Office Address Box 620, McPherson, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole  
Date well completed May 7, 1955 19  
Application for plugging filed May 6, 1955 19  
Application for plugging approved May 6, 1955 19  
Plugging commenced 1 P.M. May 7, 1955 19  
Plugging completed 3:15 P.M. May 7, 1955 19  
Reason for abandonment of well or producing formation Non Productive

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Elden Petty, Hayes, Kansas  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4175 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	199'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 195-150 feet to 40-30 feet for each plug set.

Gunned pits, circulated heavy mud on bottom, layed down half of drill pipe, circulated heavy mud at this point. Layed down all but 7 joints of drill pipe, ran measureing line and filled with heavy mud to 195', made bridge with wooden plug and 1/2 sack hulls to hold weight of 7 jts. of drill pipe. Mixed 15 sacks cement and put on that bridge. Filled with heavy mud to 40'. Made bridge with 1/2 sack hulls and mixed 10 sks. cement and filled to bottom of cellar floor. Thru plugging at 3:15 P.M.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor E. K. Carey Contractor  
Address Box 620, McPherson, Kansas

STATE OF Kansas, COUNTY OF McPherson, ss.  
Arland Bruce (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Arland Bruce  
Box 620, McPherson, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 9th day of May, 19 55

My commission expires November 13, 1956

[Signature]  
Notary Public.

PLUGGING  
FILE SEC 26 T 7 R 24W  
BOOK 117 LINE 20

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 10 1955  
5-10-55  
CONSERVATION DIVISION  
Wichita, Kansas

15-065-00729-00-00

ROTARY DRILLER'S LOG

E. K. Carey Drilling Co., Inc.  
Box 620  
McPherson, Kansas

2389 E.S.  
Elevations: 2386 D.F.  
2384 Cr.

Super #1

Casing Record:

C, NE NE NE/4  
Sec. 26-7-24N  
Graham County, Kansas

3-5/8" @ 199' w/125 lbs  
cement and 100' cc.

Well Commenced: 4-24-55  
Well Completed: 5-7-55 DAA

Contractor: E. K. Carey Contractor, Rig #1, Box 620, McPherson, Kansas  
Geologist: Don Hollar, E. K. Carey Drilg. Co. 815 Central Bldg. Wichita

Figures Indicate Bottom of Formation K. S.

Base and cellar	7
Shale	35
Sand	40
Shale	65
Sand	73
Shale	93
Shale and shells	134
Shale	198
Shells	199
Shale	1940
Sand and shale	1400
Shale and shells	1610
Shale	1890
Sand	1930
Shale	2107
Anhydrite	2153
Shale and lime	2375
Lime and shale	2685
Lime	2925
Lime and shale	2890
Lime	3500
Shale and lime	3500
Lime and shale	3590
Lime	3660
Lime and shale	3693
Lime	3906
Shale and lime	4115
Shale and lime chert	4152
Lime	4175 TD

Geologist Tops:

Heebner	3059
Toronto	3690
Lansing	3690
Base K. S.	3901
Qty. Cong.	4110
Armuckle	4150

Rotary Total Depth 4175

This is to certify that the above information is to the best of my knowledge true and correct.

SUBSCRIBED AND SWORN to before me this 9th day of May, 1955

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 10 1955  
CONSERVATION DIVISION  
Wichita, Kansas

E. K. CAREY CONTRACTOR

BY Herbert Rhoton  
Herbert Rhoton, Superintendent

5-10-55

[Signature] RP

My Commission Expires: November 15, 1956

LOGGING  
FILE NO. 26-7-24N  
WELL PAGE 117 LINE 29