


15-163-00790-00-00

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 North Market, Insurance Bldg.  
Wichita, Kansas

NORTH

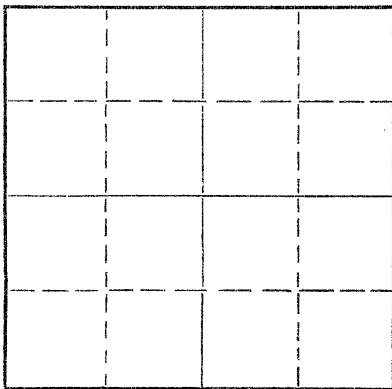

Locate well correctly on above  
Section Plat

Rooks \_\_\_\_\_ County. Sec. 30 Twp. 8 S Rge. 16W (E) \_\_\_\_\_ (W)  
Location as "NE/CNW/SW" or footage from lines SE/C SE/4 SW/4  
Lease Owner M. P. Springer  
Lease Name McComb "A" Well No. # 1  
Office Address 308 Springer Building, Tulsa 19, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed August 5, 1960 19  
Application for plugging filed \_\_\_\_\_ 19  
Application for plugging approved \_\_\_\_\_ 19  
Plugging commenced August 5, 1960 19  
Plugging completed August 6, 1960 19  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production \_\_\_\_\_ 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty  
Producing formation none Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3388 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
None				8 5/8	175'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Drilling Mud with viscosity of 42 from 3388 feet to 480 feet  
Portland cement 480 feet to 400 feet - 20 sacks  
Drilling mud with viscosity of 42 400 feet to 180 feet  
Portland cement 180 feet to 120 feet - 20 sacks  
Drilling Mud with viscosity of 42 120 feet to 40 feet  
Portland cement 40 feet to 10 feet - 10 sacks  
Drilling Mud with one sack of hulls  
and one sack of cement 10 feet to 0 feet

Cement plugs were spotted with cement circulating and pumping equipment.

RECEIVED  
STATE CORPORATION COMMISSION

SEP 1 1960 *altes*

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Sun Cementing Company  
Address Hays, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
I, Clark T. Snider, agent (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Clark T. Snider Clark T. Snider  
526 Union Center, Wichita 2, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 31 day of August, 19 60.

My commission expires April 27, 1963  
Ernestine Presley Notary Public.



P  
WELL LOG

15-163-00790-00-00

Date started 7-28-60  
Date completed 8-5-60

McComb #1  
SE/4 SE/4 SW/4  
Sec. 30-8S-16W  
Rooks County, Kansas

Anhydrite 1230'  
Kansas City 3180'  
Total depth 3388'

- 0' - 175' Sand and shale
- 175' - 365' Blue shale and sandy shale
- 365' - 790' Shale
- 790' - 895' Sand
- 895' - 1190' Shale and red bed
- 1190' - 1230' Anhydrite
- 1230' - 1770' Shale and shells
- 1770' - 2935' Lime and shale
- 2935' - 3047' Lime
- 3047' - 3092' Lime and shale
- 3092' - 3180' Lime
- 3180' - 3388' Lime and shale

RECEIVED  
REGISTRATION COMMISSION  
SEP 9 1960  
CONSE.  
WIC.  
DIVISION  
35  
7/9/60

AFFIDAVIT

State of Kansas . . . . . County of Barton

I, A. M. Jones, certify that the above is a true and correct log as reflected by the Daily Drilling Reports of the Jones Drilling Company.

By: *A. M. Jones*  
A. M. Jones, Owner

Subscribed and sworn before me this 7th Day of September, 1960.

*John W. Poos*  
John W. Poos Notary Public

My commission expires April 11, 1963.