

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 North Market, Insurance Bldg.  
Wichita, Kansas

WELL PLUGGING RECORD

Rooks County. Sec. 12 Twp. 8S Rge. 17 (E) W (W)

Location as "NE/CNW/SW" or footage from lines NW SE SW

Lease Owner Cities Service Oil Co.

Lease Name Chesney "B" Well No. 3

Office Address Bartlesville, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed July 10 19 59

Application for plugging filed July 10 19 59

Application for plugging approved July 10 19 59


Plugging commenced July 10 19 59

Plugging completed July 10 19 59

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

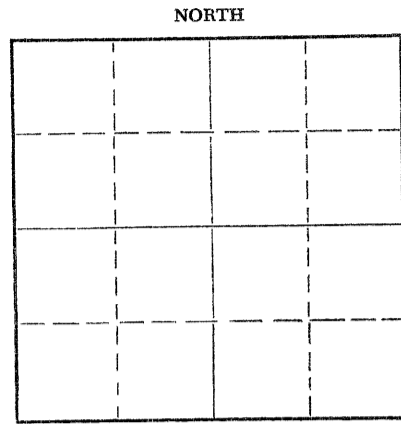

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3340 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	240'	8 5/8"	240'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

From 3340' to 540' - heavy rotary mud  
540' to 478' - plug, 1/2 sk. hulls & 20 sks. cement  
478' to 180' - heavy rotary mud  
180' to 118' - plug, 1/2 sk. hulls & 20 sks. cement  
118' to 40' - heavy rotary mud  
40' to 6' - plug, 1/2 sk. hulls & 10 sks. cement  
6' to surface - cellar

RECEIVED  
STATE CORPORATION COMMISSION  
JUL 23 1959  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Peel Brothers, Inc.

Address P.O. Box 359, Hoisington, Kansas

STATE OF KANSAS COUNTY OF BARTON, ss.  
Peel Brothers, Inc. (employee of owner) or ~~(owner or operator)~~ of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. PEEL BROTHERS, INC.

(Signature) BY: Jack Mattoia

P.O. Box 359, Hoisington, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 13th day of July, 19 59

My commission expires April 27, 1960

Ruth Brant  
Notary Public.

PLUGGING  
FILE SEC. 12 T. 8 R. 17  
BOOK PAGE 53 LINE 11

*mmh*

WELL RECORD

RECEIVED  
STATE CORPORATION  
JUL 23 1959

File 231953

7/23/59

CONSERVATION DIVISION  
Wichita, Kansas

WILDCAT.....

DISCOVERY.....

POOL.....

COMPANY Cities Service Oil Co. WELL #.....

LOCATION 1650' South and 990' West of Center

Section 12, Township 6, Range 17N.

ELEV. 1963 CO. Boone STATE Kansas

IP. Dry hole. P. & A. 7-10-59.

PERFS.....

FRAC..... ACID None

T.D. 3340' PBTD..... GRAV/GOR.....

DRLG. COMM. June 28, 1959 COMP. July 9, 1959 CONTRACTOR Pool Bros., Inc.

CASING RECORD:

8-5/8" at 240 with 175 sacks cement.

FORMATION RECORD:

lime and shale	0-215
shale	211
shale and shells	1240
anhydrite	1290
shale and shells	1560
shale	1690
shale and lime	1950
lime and shale	2200
shale and lime	2450
shale and shells	2630
shale and lime	2805
lime	2857
shale and lime	2880
lime and shale	2960
lime	3340 T.D.
Topsoil	2820
Heckner	3035
Dodge	3055
Lansing	3078
Dano Kansas City	3320
T.D.	3340

D.S.T. 2837-57, open 1 hr., rec. 10' mud;  
I.B.N.P. 965# in 30 mins., F.B.N.P. 790#  
in 30 mins.

D.S.T. 3104-25, open 1 hr., rec. 10' oil  
spotted muddy water and 60' muddy water;  
I.B.N.P. 1115# in 30 minutes, F.B.N.P.  
965# in 30 mins.

D.S.T. 3127-92, open 1 hr., rec. 22' muddy  
salt water and 90' salt water with few  
specks oil; I.B.N.P. 1075# in 30 mins.,  
F.B.N.P. 915# in 30 mins.

D.S.T. 3227-51, open 1 hr., rec. 3' oil  
spotted mud and 27' muddy salt water;  
I.B.N.P. 670# in 30 mins., F.B.N.P. 570#  
in 30 mins.

D.S.T. 3249-74, open 1 hr., rec. 83' mud;  
I.B.N.P. 1390# in 30 mins., F.B.N.P. 1045#  
in 30 mins.

D.S.T. 3272-3303, open 1 hr., rec. 22' mud;  
I.B.N.P. 525# in 30 mins., F.B.N.P. 100#  
in 30 mins.

Slope Tests (Grfs):

300'	- 0°
1016'	- 0°
1500'	- 0°
2005'	- 0°
2450'	- 0°
2991'	- 1°

7-7/8" Rotary hole.

PLUGGING  
FILE SEC. 12 T8 R 17N  
BOOK PAGE 03 LINE 11