

FOR KCC USE:

FORM CB-1 12/93

FORM MUST BE TYPED

FORM MUST BE SIGNED

ALL BLANKS MUST BE FILLED IN

EFFECTIVE DATE: 3-14-06

State of Kansas

DISTRICT # 2

CATHODIC PROTECTION BOREHOLE INTENT

SGA? ... Yes No

Must be approved by the K.C.C. sixty (60) days prior to commencing well.

Expected Spud (Starting) Date 03 13 2006
month day year

Spot (Location) Q/Q/Q East
SW - NW - NE Sec 35 Twp 25 S. Rg 3 West
1050 feet from South North line of Section
2540 feet from East West line of Section

OPERATOR: License # 33631

(Circle directions from nearest outside corner boundaries)

Name: ConocoPhillips

IS SECTION REGULAR IRREGULAR?

Address: 25760 W. 343rd Street

(Spot well on the Section Plat on Reverse Side)

City/State/Zip: Paola, KS 66071

County: Butler

Contact Person: Joe Garrison

Lease Name: MP 287 Well #: #1

Phone: (913) 294-2166 Ext. 19

Facility Name: MP 287

Ground Surface Elevation: 1329 Est. 350 MSL

Cathodic Borehole Total Depth 180 ft.

Depth to Bedrock 180 ft.

CONTRACTOR: License #: 6427

Name: (Darling Drilling) Rosencvantz-Bemis

WATER INFORMATION:

Type Drilling Equipment: Mud Rotary Cable

Aquifer Penetration: None Single Multiple

CONSTRUCTION FEATURES

Length of Cathodic Surface (Non-Metallic) Casing

Planned to be set: 200 ft.

Length of Conductor pipe (if any?): NONE ft.

Size of the borehole (I.D.): 200' - 17.5" inches

Cathodic surface casing size: 10" inches

Cathodic surface casing centralizers set at depths of: 120'; 80'; 40'; ...

Depth to bottom of fresh water: 120'

Depth to bottom of usable water: 180'

Water well within one-quarter mile: yes no

Public water supply well within one mile: yes no

Water Source for Drilling Operations:

well farm pond stream other

Water Well Location: Butler

DWR Permit #: 26

Standard Dimension Ratio (SDR) is = 26

(cathodic surface OD csg. in inches / MWT in inches = SDR)

Cathodic surface casing will terminate at:

Above surface Surface Vault Below Surface Vault

Annular space between borehole and casing will be grouted

with: Concrete Bentonite Cement

Neat cement Bentonite clay

Pitless casing adaptor will be used: Yes No at Depth 3 ft.

Anode vent pipe will be set at: 3 ft. above surface

Anode installation depths are: 340'; 330'; 320'; 310';

Anode conductor (backfill) material TYPE: Loresco SC-3

300'; 290'; 280'; 270'; 260'; 250'; 240'; 230'; 220';

Depth to BASE of Backfill installation material: 350'

210'

Depth to TOP of Backfill installation material: 190'

AFFIDAVIT

The undersigned hereby affirms that the drilling, completion and eventual plugging of this well will comply with K.S.A. 55-101, et. seq. It is agreed that the following minimum requirements will be met:

1. Notify the appropriate district office prior to spudding of and again before plugging well;
2. A copy of the approved notice of intent to drill shall be posted on each drilling rig;
3. The minimum amount of cathodic surface casing as specified below shall be set by grouting to the top.
4. An agreement between the operator and the district office on plugs and placement is necessary prior to plugging;
5. The appropriate district office will be notified before well is either plugged or casing is grouted in;
6. IN ALL CASES, NOTIFY DISTRICT OFFICE PRIOR TO ANY CEMENTING.

I hereby certify that the statements made herein are true and to the best of my knowledge and belief.

Date: 02/21/06 Signature of Operator or Agent: Debbie Anderson Title: Project Assistant

Mesa Corrosion Control

FOR KCC USE:
 API # 15- 015-23683-00-00
 Conductor pipe required NONE feet
 Minimum cathodic surface casing required 200' feet ALT 3
 Approved by: DPW 3-9-06

This authorization expires: 9-9-06
 (This authorization void if drilling not started within
 6 months of effective date.)
 Spud date: _____ Agent: _____

RECEIVED
 FEB 24 2006
 KCC WICHITA

REMEMBER TO:

- File Drill Pit Application (form CDP-1) with Intent to Install;
- File Completion Form CB-2 within 30 days of spud date;
- Notify appropriate district office 48 hours prior to workover or re-entry;
- Submit plugging report (CB-4) within 30 days after plugging is completed.

Mail to: KCC - Conservation Division, 130 S. Market - Room 207B, Wichita, Kansas 67202-1286.

33
25
38

IN ALL CASES PLOT THE INTENDED WELL ON THE PLAT BELOW

Show the relationship to other wells or facilities proposed to be serviced by the intended cathodic borehole. Please show all the wells, existing cathodic boreholes, pipelines or facilities within 1/2 mile of the proposed borehole.



API NO. 15- _____
 OPERATOR ConocoPhillips LOCATION OF WELL: COUNTY Butler
 LEASE MP 287 1050 feet from south/north line of section
 WELL NUMBER MP 287 2540 feet from east west line of section
 FACILITY NAME _____ SECTION 35 TWP 25S RG 3E

SPOT: QTR/QTR/QTR/QTR OF ACREAGE
SW - NW - NE -
 IS SECTION X REGULAR or _____ IRREGULAR
IF SECTION IS IRREGULAR, LOCATE WELL FROM NEAREST CORNER BOUNDARY.

Section corner used: _____ NE _____ NW _____ SE _____ SW
PLAT

(Show location of intended cathodic borehole.)

(Show footage from nearest lease, unit or outside section boundary line.)

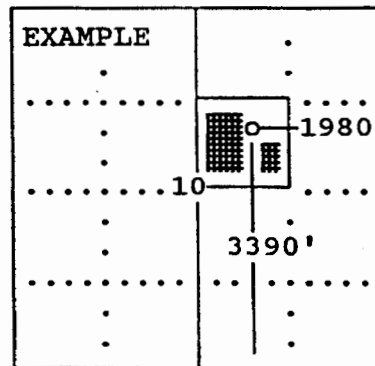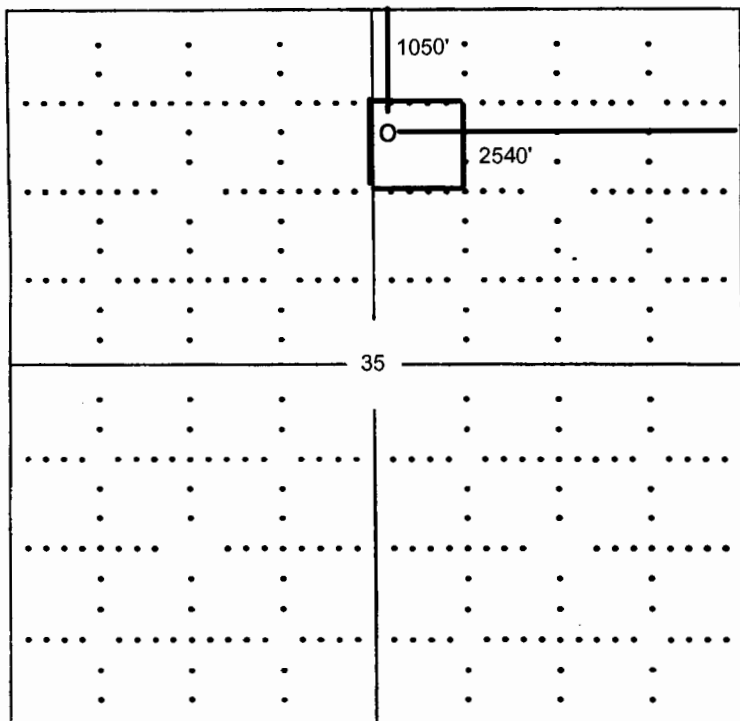

SEWARD CO.

In plotting the proposed location of the well, you must show:

- 1) The manner in which you are using the depicted plat by identifying section lines, i.e. 1 section, 1 section with 8 surrounding sections, 4 sections, etc.;
- 2) the distance of the proposed drilling location from the section's south/north and east/west; and
- 3) the distance to the nearest lease, unit or outside section boundary line.