

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-055-20166-00-00  
Spot: E2 Sec/Twnshp/Rge: 15-23S-31W  
2640 feet from N Section Line, 1320 feet from E Section Line  
Lease Name: CAMPBELL Well #: 15-1  
County: FINNEY Total Vertical Depth: 2725 feet

Operator License No.: 32198  
Op Name: PETROSANTANDER (USA) INC.  
Address: 6363 WOODWAY STE. 350  
HOUSTON, TX 77057

| String | Size  | Depth (ft) | Pulled (ft) | Comment         |
|--------|-------|------------|-------------|-----------------|
| PROD   | 5.5   | 2724       | 0           | WITH 100 SX CMT |
| SURF   | 8.625 | 393        |             | WITH 300 SX CMT |

\$ 88.56

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 04/04/2003 9:00 AM  
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY  
Proposal Rcvd. from: PETE KUNEYL Company: PETE KUNEYL Phone: (713) 784-8700

Proposed Plugging Method: PUMP DOWN 5 1/2" WITH HULLS & 30 SX CMT. PERFORATE AT 1200'. SQUEEZE WITH 80 SX CMT + CASING VOLUME. LEAVE CASING FULL. PUMP DOWN 5 1/2" X 8 5/8" ANNULUS WITH 150 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 04/10/2006 2:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

PUMP 30 SX CMT WITH 400# HULLS AHEAD OF CMT. DISPLACE WITH 59 BBLs WATER. PRESSURE TO 400#. PERFORATE AT 1250'. STARTED PUMPING CMT DOWN 5 1/2" CASING. AFTER 40 SX CMT PUMPED @ 400#, GOT CMT RETURNS OUT 5 1/2" X 8 5/8" ANNULUS. CIRCULATE CMT OUT OF WELL WITH FRESH WATER. (HAVE A SHALLOW HOLE IN THE 5 1/2" CASING.) 04/7/06: TRIP IN HOLE WITH BIT & TUBING. TAG TOC @ 75'. DRILL CMT TO 287'. (HOLE IN 5 1/2" APPARENTLY AT 75'.) CONTINUE TRIP IN HOLE WITH TUBING & BIT. TAG TOC AGAIN @ 1090'. DRILL CMT TO 1251'. STILL IN CMT WHEN DRILLING CEASED. 04/10/06: PERFORATE AT 1050'. TRIP IN HOLE WITH CMT RETAINER ON 2 3/8" TUBING. SET AT 1005'. PRESSURE 2 3/8" X 5 1/2" ANNULUS WITH 8 5/8" CLOSED TO 500#-HOLDING. OPEN 8 5/8" CIRCULATING FLUID. STILL HAVE HOLE @ 75" IN 5 1/2". PUMP 80 SX CMT VIA TUBING THROUGH PERFS AT 1050' AT 1000 PSI DECREASING TO 700 PSI. STING OUT OF RETAINER. ROUND TRIP TBG TO TAKE CENTRALIZER OFF. SPOT TUBING @ 900'. SPOT 35 SX CMT AT 900' TO 500'. TOO. PERFORATE AT 400'. TRIP IN HOLE WITH PACKER @ SET AT 200'. PUMP INTO PERFS WITH 80 SX CMT. NO RETURNS OR BLOW UP 8 5/8" ANNULUS. TOO. REMOVE PACKER. WELL BACK FLOWED 200' OF WATER OUT OF HOLE. HAD GOOD CMT COMING OUT 5 1/2" CASING & 5 1/2" X 8 5/8" ANNULUS. CLOSE WELL IN.

Perfs:


| Top  | Bot  | Thru | Comments |
|------|------|------|----------|
| 2668 | 2674 |      |          |

RECEIVED  
MAY 03 2006  
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: TBG

District: 01

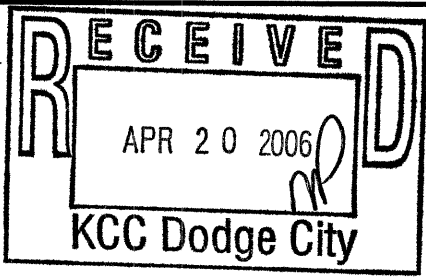

Signed Ken Jehlik (TECHNICIAN)

**INVOICED**  
DATE 5-4-06  
INVOICE NO. 2006061589

Form CR-24  
PAT