

15-073-19511-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

WELL PLUGGING RECORD

NORTH


Locate well correctly on above  
Section Plat

Greenwood County. Sec. 22 Twp. 23S Rge. 10 (E) ~~10W~~  
Location as "NE/CNW/SW" or footage from lines 250'W & 660'N of SE Corner  
Lease Owner E. W. Sauder et al  
Lease Name Pearson Well No. 2  
Office Address Gridley, Kansas.  
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole  
Date well completed Aug. 11, 1953 19  
Application for plugging filed Aug. 14, 1953 19  
Application for plugging approved Aug. 14, 1953 19  
Plugging commenced Aug. 15, 1953 19  
Plugging completed Aug. 17, 1953 19  
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes.

Name of Conservation Agent who supervised plugging of this well A. W. Hartsook  
Producing formation Depth to top Bottom Total Depth of Well 2300 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Sandy shale	2 BW	240	250	12 1/2	13'	Cmtd W/13 sx.
Water sand	HFW	1180	1230	10"	850	850'
23 Lime	HFW	1300	1315	8"	1460	1460
Shale	1-BW	1785	1795	7"	2100	2100
Btsyle Sand	Show	2265	2269			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

100 Buckets in bottom of hole. Wood plug at 150 feet and six sacks cement filled to 15' with mud and sod and then three sacks cement. Filled to surface with sod, and one sack cement on top.

Received  
8/22/53

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sauder Drilling Company,  
Address Gridley, Kansas.

STATE OF Kansas, COUNTY OF Coffey, ss.


(employee of owner, or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) E. W. Sauder  
Gridley, Kansas. (Address)

SUBSCRIBED AND SWORN TO before me this 17 day of August, 1953

My commission expires December 12, 1955 Notary Public.

24-7368-S 3-53-20M

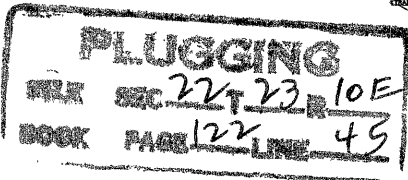

## WELL LOG

DRILLED FOR: E.W.Sauder et al,  
ADDRESS: Gridley, Kansas.

CONTRACTOR: Sauder Drilling Co.  
ADDRESS: Gridley, Kansas.

FARM: Pearson Well #2

COMMENCED: July 10, 1953  
COMPLETED: Aug. 11, 1953

TOTAL DEPTH: 2300'  
ELEVATION:

LOCATION: ~~XX~~ 250' West of & 660' North  
of SE Cr. of Sec. 22-23s-10e;  
Greenwood County, Kansas.

CASING:	run	pulled	size
	13'	Cmt'd W/13 Sx.	12 1/2"
	850'	850'	10"
	1460'	1460'	8"
	2100'	2100'	7"

PRODUCTION: Dry  
Plugged August 15th, 1953

0 to 7' Lime  
12 Shale  
30 Lime  
45 Shale  
60 Lime  
85 Shale  
90 Lime  
115 Shale  
120 Lime  
135 Shale  
150 Lime  
175 Shale  
180 Lime  
240 Shale  
250 Sandy shale 2-BW  
350 Shale  
360 Lime  
370 Shale  
400 Lime  
465 Shale  
470 Lime  
545 Shale  
550 Lime  
560 Shale  
590 Lime  
625 Shale  
650 Lime  
655 Shale  
660 Lime  
665 Shale  
680 Lime  
685 Shale  
700 Lime  
725 Shale  
730 Lime  
735 Shale  
760 Shale & Shells  
780 Shale  
800 Lime  
810 Shale  
825 Lime  
880 Shale  
885 Lime  
905 Shale  
915 Lime  
920 Shale  
925 Lime  
945 Shale

1010 Lime  
1060 Shale  
1065 Lime  
1110 Shale  
1125 Lime  
1160 Shale  
1170 Lime  
1180 Shale  
1230 Sand HFW  
1250 Shale  
1275 Lime  
1300 Shale  
1315 Lime HFW  
1320 Shale  
1330 Lime  
1340 Shale  
1470 Lime  
1590 Shale  
1690 Lime  
1695 Shale  
1750 Lime  
1860 Shale 1-BW 1785-95  
1870 Lime  
1900 Shale cave  
1945 Lime  
1965 Shale  
1975 Lime  
2025 Shale  
2040 Lime  
2225 Shale  
2265 Sandy shale  
2269 Sand (1-gal oil per hr.)  
2284 Sandy shale  
2290 Sand (dry)  
2300 Shale  
2300 Total Depth

Made 10 gallons oil and trace of  
water in twelve hour test.

**PLUGGING**  
FILE SEC 22-23-10E  
BOOK PAGE 122 LINE 45