FOR KCC USE:	FORM CB-1 12-93
EFFECTIVE DATE: 3-21-07 State of Kan:	FORM MUST BE TYPED
	TOTAL MICO! BE GIGITED
DISTRICT #: CATHODIC PROTECTION	
SGA? Yes X No Must be approved by the K.C.C. sixty (•
	Spot (Location) Q/Q/QEast
Expected Spud (Starting) Date <u>March</u> 19 2007	SE SE NE Sec 2 Twp 29 S, Rg 38 X West
month day year	2238 FNL feet from South / North Line of Section
OPERATOR: License # 5952	30 FET. feet from East / West Line of Section
	(Circle directions form nearest outside corner boundarys)
Name: BP America Production Company	IS SECTION X REGULAR IRREGULAR?
Address: P. O. Box 3092 Room 3.276A, WL-1	(Spot well on Section Plat on Reverse Side)
City/State/Zip: Houston, Texas 77253-3092	County: Grant
Contact Person: DeAnn Survers	Lease Name: Silivan Well #: 3
Phone: (281) 366-4395	Facility Name: PIPELINES IA & IK (Sullivan)
	GroundSurfaceElevation: 3097.339 MSI
CONTRACTOR: License #: 33925	Cathodic Borehole Total Depth 250 ft.
Name: C. M. Drilling Monte Moore Orilling	Depth to Bedrockft.
Name: The second of the second	WATER INFORMATION:
	Aquifer Penetration: None SingleMultiple
Type Drilling Equipment: X Mud Rotary Cable	
Air Rotary Other	Depth to bottom of usable water:
CONSTRUCTION FEATURES	Water well within one-quarter mile:
Length of Cathodic Surface (Non-Metallic) Casing	abilitation bupping from the film of the film of
Planned to be set:ft.	Water Source for Drilling Operations:
Length of Conductor pipe (If any?)ft.	well farm pond stream other
011 10 ⁴¹ 511-4	Water Well Location:
Size of the borehole (I.D.): 8" /0" Surface inches	DWR Permit #:
Cathodic surface casing size: 4" inches	Standard Dimension Ratio (SDR) is = 20 or less
Cathodic surface casing centralizers set at depths of: N/A	(cathodic surface OO csg. in inches / MWT in inches = SDR)
Cathodic surface casing will terminate at:	Annular space between borehole and casing will be grouted
Above surface Surface VaultBelow Surface Vault	with:ConcreteBentonite Cement
	Neat cementX_Bentonite clay
Pitless casing adaptor will be used:Yes/No at Depthft.	
013 - 100 As 11	Anode vent pipe will be set at:5ft. above surface
Anode installation depths are: 80-250 con+invoys	Anode conductor (backfill) material TYPE: SE2 Coke Breeze
	050.
	Depth to BASE of Backfill installation material: 250' Depth to TOP of Backfill installation material: 159' 80
AFFIDA	NIT Depth to TOP of Backfill installation material: 150'80
The undersigned hereby affirms that the drilling, completion and e	eventual plugging of this well will comply with K.S.A.55-101.
et. seg. It is agreed that the following minimum requirements will be met:	
Notify the appropriate district office prior to spudding of and again before	e plugging well:
A copy of the approved notice of intent to drill shall be posted on each d	
The minimum amount of cathodic surface casing as specified below sha	• •
An agreement between the operator and the district office on plugs and	
The appropriate district office will be notified before well is either plugge	
6. IN ALL CASES, NOTIFY DISTRICT OFFICE PRIOR TO ANY CEMENT	
I hereby certify that the statements made herein are true and to the b	
Date: 2/22/2007 Signature of Operator or Agent:	In Smugen Title: Regulatory Staff Asst.

FOR KCC USE: RECEIVED

Conductor pipe required ___ Minimum cathodic surface casing required Approved by: 43-16-07 This authorization expires: 9-16-07
(This authorization void if drilling not started within 6 months of effective date.) Spud date: . Agent:

WICHITA, KS

KANSAS CORPORATION COMMISSION

MAR 07 2007

CONSERVATION DIVISION

REMEMBER TO:


- File Drill Pit Application (form CDP-1) with Intent to Install;
- File Completion Form CB-2 within 30 days of spud date; Notify appropriate district office 48 hours prior to workover or re-entry;
- Submit plugging report (CP-4), within 30 days after plugging is completed.

IN ALL CASES PLOT THE INTENTED WELL ON THE PLAT BELOW

Show the relationship to other wells or facilities proposed to be serviced by the intented cathodic borehole. Please show all the wells, existing cathodic boreholes, pipelines or facilities within 1/2 mile of the proposed borehole.

API NO. 15- 067-2 1630-0000	
OPERATOR BP America Production Company LEASE	LOCATION OF WELL: COUNTY Grant 2238 FNL feet south/north line of section
WELL NUMBER	feet east/west line of section
SPOT: QTR/QTR/QTR/QTR OF ACREAGE NE - SE - NE	IS SECTION X REGULAR or IRREGULAR IF SECTION IS IRREGULAR, LOCATE WELL FROM NEAREST CORNER BOUNDARY. Section corner used: X NE NW SE SW
	PLAT

(Show location of intented cathodic borehole.) (Show footage to nearest lease, unit or outside section boundary line)

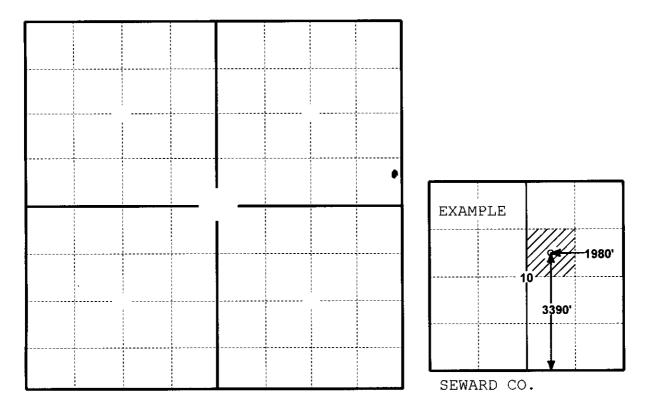

In plotting the proposed location of the well, you must show:

- 1) The manner in which you are using the depicted plat by identifying section lines, i.e.
- 2) 1 section, 1 section with 8 surrounding sections, 4 sections, etc.; the distance of the proposed drilling location from the section's south/north and 3) east/west; and

APPLICATION FOR SURFACE PIT

Submit in Duplicate

Operator Name:		License Number:		
BP America Production Company		5952		
Operator Address:				
•				
P. O. Box 3092 Contact Person:			Phone Number:	ï
			(281) 366-4395	
DeAnn Smyers Room 3.276A, WL-1 Lease Name & Well No.:			Pit Location (QQQQ):	
	(Sulliva	an)	•	
Facility Name: Pipeline IA & IK		4.7	<u>NE SE SE NE</u>	
Type of Pit:	Pit is			
Emergency Pit Burn Pit	X Proposed	Existing !	Sec. <u>2</u> Twp. <u>29s</u> R. <u>38</u> Ea	st 🔀 West
Settling Pit 🔣 Drilling Pit	If existing, date constructed		Feet from XNorth/ ☐ South Line of Section	
☐ Workover Pit ☐ Haul-Off Pit	Pit capacity		Feet from X East/ West Line of Section	
(If WP Supply API No. or Year Drilled)	PORTABLE PIT (bbis)		County	
Is the pit located in a Sensitive Ground Wate	r Area? Yes	No No	Chloride concentration: 0	mg/l
io dio più iodalea in di conomia a conomia			(For Emergency Pits and Settling Pits, only)	
Is the bottom below ground level?	Artificial Liner?		How is pit lined if a plastic liner is not u	sed?
☐ Yes ☐ No	Yes [No		
Pit dimensions (all but working pits):	Lengt	th (feet)	Width (feet)	A Steel Pits
			nt (feet)	
	Depth from ground leve			
If the pit is lined give a brief description			edures for periodic maintenance and determiniculating any special monitoring.	
material, thickness and installation procedure	·-	inter integrity, in	Kauaival	
			KANSAS CORPORATION C	
			MAR 0.7 200)7
			A CLICKY A TIME IN THE	0.01
			CONSERVATION DIVI	SION
Distance to necreat water man		•	allowest fresh water 260 feet.	
Source of in			rmation: red well owner electric log	KDWR
T T S TEET DEPTH OF WATER WELL		Ted Well dwiller dicate log		
Line general, committee and co		over and Haul-Off Pits ONLY:		
Producing Formation: Type of material utilized in drilling/workover				
Number of producing wells on lease: Number of wor		king pits to be utilized	 '	
Barrotto of the product of the produ		procedure:		
Does the slope from the tank battery allow all spilled fluids to				
_ ··· <u>_</u> ···		st be closed within 365 days of spud date	l. 	
I hereby certify that the above statement	ents are true and cor	rect to the bes	st of my knowledge and belief.	
		0.0		
February 22, 2007 Date		Signature	of Applicant or Agent	
Date Signature of Applicant or Agent KCC OFFICE USE ONLY Steet				
ACC OFFICE USE UNL!				001
	KCC OFF			eel
Date Received: 3/7/07 Permit N	KCC OFF	ICE USE ONLY	St	