


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

## WELL PLUGGING RECORD

NORTH

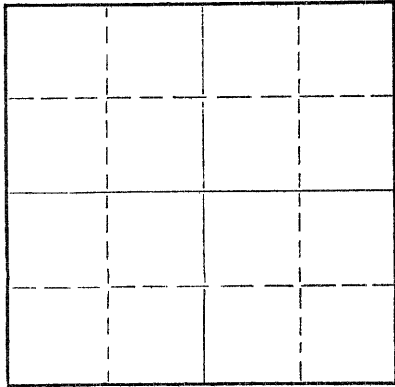Locate well correctly on above  
Section Plat

Rooks County. Sec. 28 Twp. 9 Rge. 18 (E) W (W)  
Location as "NE/CNW4SW4" or footage from lines NE NE NW  
Lease Owner Morgenstern & Specter, Inc.  
Lease Name Baldwin Well No. 1  
Office Address Russell, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging approved \_\_\_\_\_ 19\_\_\_\_  
Plugging commenced 3-20-63 \_\_\_\_\_ 19\_\_\_\_  
Plugging completed 3-22-63 \_\_\_\_\_ 19\_\_\_\_  
Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3602 Feet  
Show depth and thickness of all water, oil and gas formations.

## OIL, GAS OR WATER RECORDS

## CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	1510'	None
				5-1/2"	3598'	2668'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Checked hole to 3602', sanded to 3580' and dumped 4 sacks of cement @ 3580' with dump bailer. Pulled 5 1/2" casing up 37 joints and circulated pipe with jell mud. Pumped in 20 sacks of cement @ 500'. Pulled 5 1/2" casing to 180' and pumped in 20 more sacks of cement. Pulled balance of 5 1/2" casing, bailed mud to 40' and ran 10 sacks of cement to base of cellar.

RECEIVED  
STATE CORPORATION COMMISSION3/28/63  
MAR 28 1963

PLUGGING COMPLETE.

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor KNIGHT CASING PULLING COMPANY  
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.  
Noel J. Knight (employee of owner) or (~~owner~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) \_\_\_\_\_

Chase, Kansas  
(Address)SUBSCRIBED AND SWORN to before me this 25th day of March, 1963My commission expires May 20, 1964

Notary Public.



WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY  
412 Union National Bk Bldg. Wichita, Kansas


COPY

Company - CIVIL SERVICE OIL CO.  
Farm - Baldwin No. 1

SEC. 28 T. 9 R. 18W  
NEC NW  
330' S & 330' W of N/4 Cor.

County. Rocks

KANSAS



Total Depth. 3602'

Comm. 7-12-47

Comp. 7-25-47

Shot or Treated. 500 gals. 7-28-47; 1000 gals. 7-31-47

Contractor. R. V. Rine Drilling Company

Issued. 11-1-47

## CASING:

8-5/8" 1510' Cem. W/650 Sx.

Recem. top of 8-5/8" W/50 Sx.

5-1/2" 3598' Cem. W/150 Sx.

Elevation. \_\_\_\_\_

Production. Phys. Pot. 82 oil,  
1.6% water, 24 hrs.

Figures indicate Bottom of Formations.

clay & sand	40
shale & sand	350
sand & shale	955
shale & shells	1010
shale, shells & sand	1355
shale & shells	1498
anhydrite	1540
shale & shells	2080
lime & shale	3025
lime	3095
lime & shale	3255
lime	3545
lime & shal	3585
lime	3604
3604 Rot. TD =	3600 SLM
lime	3602 T.D.

Total Depth 3602

## TOPS:

Lansing	3334'
Simpson	3587'
Arbuckle	3598'
Penetration	4'
Total Depth	3602'

1 bailer oil per hour.

7-7/8" rotary hole.