

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR

FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging off formations.

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:

Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

Rooks County. Sec. 21 Twp. 8 Rge. 19 (E) (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines Center  $3\frac{1}{2}$  S $\frac{1}{2}$  NE

Lease Owner W. H. Hartman

Lease Name Silvers Well No. 1

Office Address Wichita, Kansas

Character of Well (Completed as Oil, Gas or Dry Hole) Dry hole

Date, well completed Aug. 29th, 1942 8 A. M. 193

Application for plugging filed do 193

Application for plugging approved do 193

Plugging Commenced do 11 A. M. 193

Plugging Completed do 9 P. M. 193

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 193

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well C. T. Alexander

Producing formation Depth to top Bottom Total Depth of Well 3492 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				10"	128	Cemented

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Run 2600' drill pipe back in hole, circulated heavy mud, layed down 500' drill pipe, circulated heavy mud every 500' up to within 125' of top. Put in wooden plug at 125'; Spotted 19 sax cement through drill pipe. Placed wooden plug at 26' from top, cemented up to 6' of top of surface pipe, left hole set 24 hours, cut offpipe and welded cap on same.

PLUGGING  
FILE SEC 21 8 R 1942  
BOOK PAGE 48 LINE 38

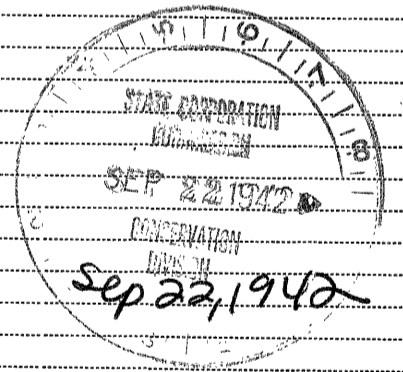

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Three Way Drilling Company, Address Union Nat'l Bank Bldg, Wichita, Kansas.

STATE OF Kansas, COUNTY OF Sedgwick, ss.

I, W. Murfin, with contracting firm (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. THREE WAY DRILLING COMPANY,

(Signature) W. Murfin

Union Nat'l Bank Bldg, Wichita, Kansas. (Address)

SUBSCRIBED AND SWORN to before me this 1st day of September, 1942.

My commission expires February 5, 1945.

WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY  
412 Union National Bank Bldg, Wichita, Kansas.

THREE WAY DRILLING CO.- W.L.HARTMAN  
Silver No. 1

SEC. 21 T. 8 R. 19 W.  
CS  $\frac{1}{2}$  SW NE

Total Depth. 3492  
Comm. 8-13-42 Comp. 8-29-42  
Shot or Treated.  
Contractor. Three Way Drilling Co.  
Issued. 9-5-42

County Rooks.



CASING.

10" 128' Surface.

Elevation.

Production. DRY.

Figures Indicate Bottom of Formations.

no log	125	lime and shale breaks	3146
sdv shale	196	lime	3236
shale and shells	565	3230 equals 36 Corr.	
shale	590	lime cored	3246
sand	620	coring	3254
sdv shale	787	lime	3355
shale and shells	1150	shale blue	3360
red rock	1195	lime and chert	3382
shale red and iron	1435	lime and shale breaks	3412
shale iron and gyp	1460	shale	3454
iron and lime	1475	shale and lime	3470
shale and lime	1605	shale	3478
anhydrite	1614	lime	3492
shale and shells	1893		
shale and lime	2050	Total Depth.	
shale and shells	2118		
shale and lime	2192		
lime	2215		
shale and lime	2270		
shale and shells	2348		
lime	2478		
shale and shells	2556		
shale	2754		
sdv shale	2794		
lime	2816		
shale and shells	2914		
lime	3052		
shale and lime	3112		

